

CDM 2015 RESIDUAL RISKS

1. The Contractor is to locate, protect and divert as necessary all existing services on site prior to commencing work.
2. All areas of excavation are to be scanned and marked for existing services prior to any excavation.
3. Be aware of possible live drainage flows and foul effluent during construction. The Contractor shall assess and implement a safe working system and equipment (PPE) as necessary.
4. When working with live drainage there is an increased risk from waterborne diseases such as leptospirosis and wels disease.
5. Site is in proximity to Network Rail land, Railway embankment and Railway.
6. UXO risk (Unexploded Ordinance). Contractor to undertake all reasonable precaution to mitigate the risk of unexploded ordnance on site, in accordance with recommendations in site investigation report.


The above residual risks are for non-standard hazards. It is assumed that a competent contractor familiar with the construction of this type of work will be appointed who will be aware of the standard hazards.

DO NOT SCALE THIS DRAWING. ALL SETTING OUT TO ARCHITECT'S DETAILS AND DRAWINGS

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWING ISSUES AND THE SPECIFICATION.

Notes:

- G1. All building materials, components and workmanship to comply with the appropriate public health acts, building regulations, british standards and codes of practice and the appropriate manufacturer's recommendations.
- G2. For all specialist work see relevant drawings.
- G3. Any discrepancies, errors or omissions to be reported to the project co-ordinator for further instructions before commencement of works.
- G4. The Engineer is not responsible for dimensions, except where shown on his drawings. All setting out information, dimensions, etc, shall be calculated from the Architect's drawings.
- S1. All block work paths to be edged with block stretcher course unless otherwise stated.
- S2. Granite ramps denoted by proposed granite setts.

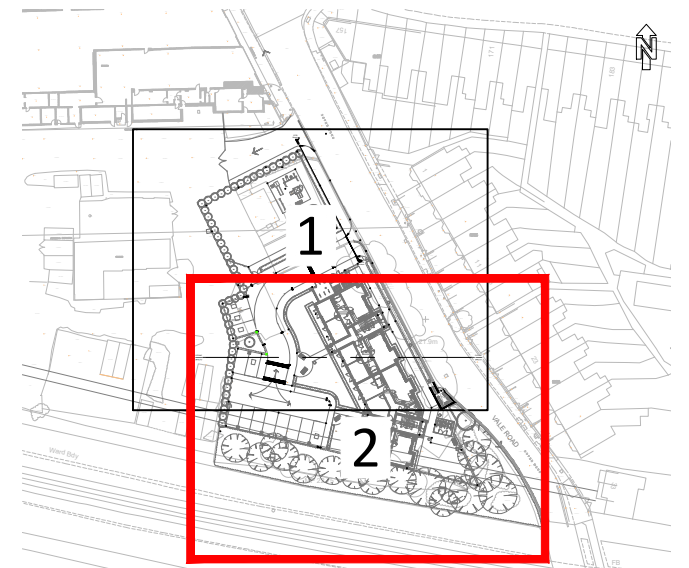

KEY PLAN

CUTLINE
CUTLINE

CUTLINE
CUTLINE

- KEY
- Proposed HB2 Kerb with 125mm Face
 - Proposed BN Kerb with 6mm Face
 - Proposed Conservation Kerb 25mm Face
 - Proposed Granite Setts
 - Proposed PC Edging
 - Proposed Transition Kerb
 - Proposed Tangent Point
 - Proposed Level
 - Proposed Level to Match Existing
 - Proposed Gradient
 - Proposed Retaining Wall
 - Existing Retaining Wall
 - Proposed Quadrant Kerb

1m 2m 3m 4m 5m 10m
SCALE 1-100

21.9m

VALE ROAD

P03	Level raised & Quadrants added	MJF/JEM/02.11.21
P02	PRELIMINARY ISSUE	MJF/JEM/04.02.21
P01	DRAFT ISSUE	AM/MJF/04.12.20
Rev	Amendment	Drn/Chk/Date

considine
civil + structural engineers
25 Hollingworth Court, Turkey Mill
Ashford Road, Maidstone, Kent ME14 5PP
t: 01622 919918 e: info@considine.co.uk
www.considine.co.uk

Client:
BRT PROPERTIES KENT LTD

Project:
2 VALE ROAD, NORTHFLEET
GRAVESEND
KENT, DA11 8BZ

Drawing Title:
ENGINEERING LAYOUT
SHEET 2 OF 2

considine ref	drawn by	date	drawing scales	original paper size
3474	AM	DEC' 20	1:100@A1, 1:200@A3	A1

drawing reference	project	originator	volume	level	type	role	number
3474- CON - 00 - XX - DR - C - 1501							

status:	SUITABLE FOR INFORMATION
revision:	revision status:
P03	PRELIMINARY