



Braemar

Epic paving...
hewn from rock, ground by diamonds.



Express Yourself

We created the Braemar range by combining the very best of natural stone with state-of-the-art manufacturing processes to unlock creative freedom for the architect and landscape designer.

4 Granite options

2 Surface finishes

3 Paving sizes

Braemar



Natural Aesthetics

We source granite aggregates from around the UK and beyond to create Braemar's natural granite appearance.

The high granite content in Braemar's diamond ground finish retains all the hard wearing and long-lasting attributes of natural stone.

The result is a vibrant, high quality alternative to natural stone, with similar colouration and finish, meeting the needs of designer and client alike.



Enduring Appeal

Your Choice

Our colour range is balanced to empower landscape designers tasked with creating diverse paving schemes. Choose single or co-ordinating colours for a rich natural appeal or add drama to open spaces with striking colour mixes.

The clean edges of Braemar block paving make a strong statement while the chamfered edge of Braemar flags add additional interest, both with the option of two sophisticated diamond ground finishes to define the mood.



Ground Textured

Rugged Appeal

Braemar Ground Textured finish creates an effect similar to hammered granite, with interest on the surface, which has been ground to create a uniform textured detail with granite highlights.



Ground

Modern Surface

Braemar Ground finish creates an attractive, smooth effect, similar to honed granite which highlights the colouring in the natural granite aggregates.

Block Paving



Premium concrete paving with the aesthetic appeal of natural granite.

- Cost-effective alternative to natural stone
- Premium block paving
- Manufactured with natural granite aggregates
- Superb hard-wearing granite surface
- Vibrant long-lasting colours
- Creates a striking, contemporary look
- Readily available with much shorter lead times than natural stone


 PrimeTop®  Ef-Stop®



200 x 100mm



300 x 200mm



600 x 300mm

Sizes



80mm

Depths



Paving Flags


High performance paving with the aesthetic appeal of natural stone.

- Premium flag
- Diamond ground in one finish
- Manufactured with natural granite aggregates
- Superb hard-wearing granite surface
- Vibrant long-lasting colour
- Creates a striking, contemporary look
- Readily available with much shorter lead times than natural stone
- Cost effective alternative to natural stone

✔ PrimeTop® ✔ Ef-Stop®



SCAN HERE



400 x 400mm

Sizes



50mm

Depths



Gravel







Colour Range

BRAEMAR BLOCK PAVING


Alto Silver

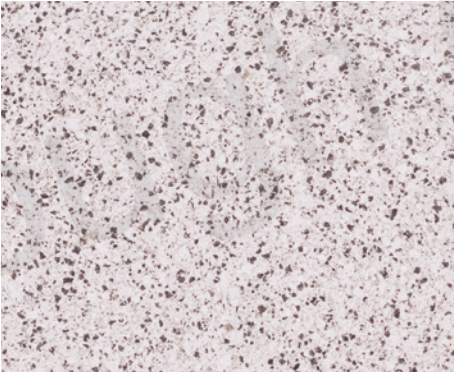


Jura Grey

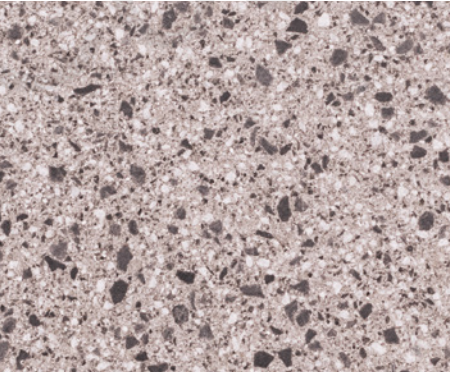

Innis Black

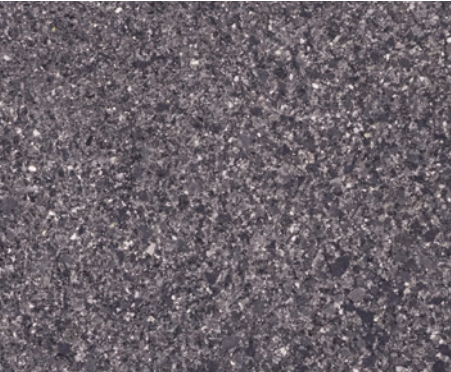


Arran Stone

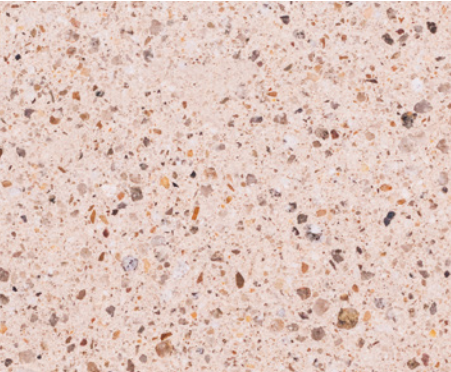

BRAEMAR PAVING FLAGS


Alto Silver

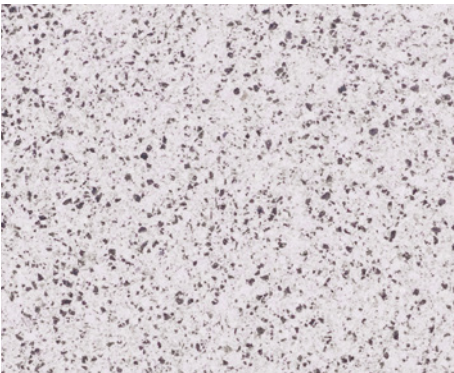



Laying Patterns


BRAEMAR BLOCK PAVING

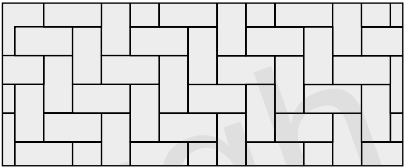


Herringbone 90° 200 x 100mm



Stretcher bond 300 x 200mm

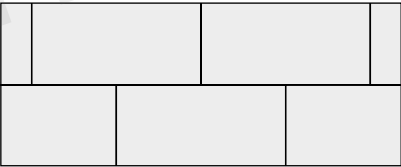


Stretcher bond 600 x 300mm

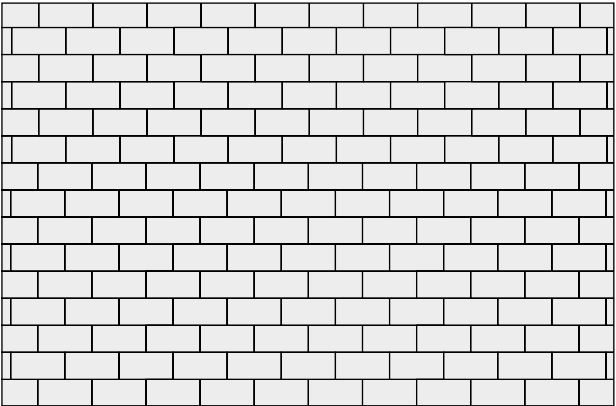


Stretcher bond 200 x 100mm

BRAEMAR PAVING FLAGS

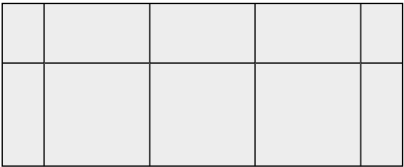

Stack bond 400 x 400mm

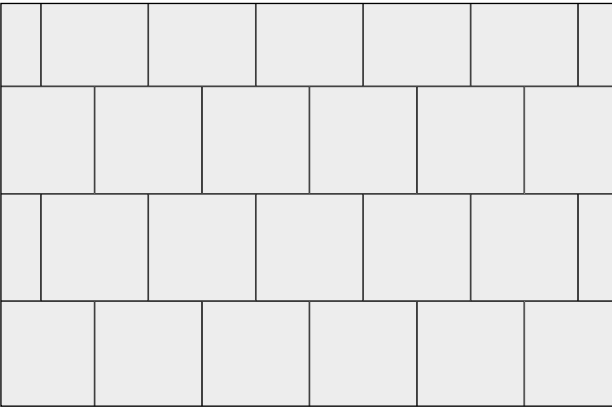

Stretcher bond 400 x 400mm

Technical Information

BRAEMAR BLOCK PAVING



Specification		
Product type	Concrete Paving Block	
Manufactured to	BS EN 1338:2003	300x200x80mm 200X100X80mm
	BS EN 1339:2003	600X300X80mm
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m² cement	
Surface Finish	Ground/Ground Textured	
Granite Content in Surface Layer (Not less than %)	Arran Stone 83.3% Alto Silver 63.3% Innis Black 53.3% Jura Grey 51.3%	
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence	
Slip/Skid risk	Low	
Installed to	(Externally)	BS 7533-3:2005 200X100X80mm 300X200X80mm
		BS 7533-4:2006 600X300X80mm
	(Internally)	Details available on request
Strength	BS EN 1338:2003	Typical tensile splitting strength of >3.6MPa
	BS EN 1339:2003	Typical tensile splitting strength of >5MPa (Class 3)
BS	Plus Q24 110	200X100X80mm
	Create 45-20 64/400	300X200X80mm
	Plus Q24 110	600X300X80mm
	Create 45-20 64/395	
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm	
Abrasion Resistance	Class 3	
Durability (Freeze-thaw)	Class 3	
External Fire Performance	Deemed to satisfy. See Commission Decision 2000/553/EC	
Reaction to fire	Class A1	
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com	
Energy used	100% renewable energy	
Water used	100% from our rainwater harvesting system and groundwater bore hole	
Recycled content	Not less than 10%	200X100X80mm 300X200X80mm
	Not less than 6%	600X300X80mm
Carbon Footprint	34kgCo²e/m²	
Recyclable	100% of this product can be recycled	
Manufacturing & Delivery	From one location within the UK	
breemrating www.bre.co.uk	B, according to the Green Guide to Specification, 4 th Edition 2009. A, can be achieved when used in conjunction with a prepared recycled sub-base.	

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Stock

product	size (mm)	edge	colours available	m² per pack	m² per slice	no. per m²	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Braemar Ground & Ground Textured 80mm BIM	200 x 100 x 80	Square edge	Arran Stone, Alto Silver, Jura Grey, Innis Black	9.6	1.6	50	480	1756	1746
	300 x 200 x 80	Square edge	Arran Stone, Alto Silver, Jura Grey, Innis Black	9.6	2.4	16.66	160	1756	1746
	600 x 300 x 80	Square edge	Arran Stone, Alto Silver, Jura Grey, Innis Black	7.2	3.6	5.55	40	1319	1309

BIM - This product is available to download from our website in BIM Level 2 format.

IMPORTANT INFORMATION

A regular maintenance programme should always be established and active for all public spaces to reduce the risk of slip/skid. Tobermore's stunning ground and ground textured finishes are created using a modern diamond grinding process which achieves a premium finish. Ground textured provides a higher level of slip resistance.

Tobermore recommend that you separate product groups using contrasting bands of colour as each product is manufactured separately and may have slight variations in colour. Light coloured blocks emphasise tyre marks and oil spills. It must be accepted that these products will need more maintenance if the overall appearance is to be maintained.

BRAEMAR PAVING FLAGS



Specification	
Product type	Concrete Paving Flag
Manufactured to	BS EN 1339:2003
Granite content	Not less than 63.3% of granite aggregate in surface layer
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m ³ cement
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	Typical tensile splitting strength of >5MPa (Class 3)
Slip/Skid risk	Low
Installed to	(Externally) BS 7533-4:2006 (Internally) Details available on request
BS	Plus Q25 315 Create 45-20-64/395
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance	Class 3
Durability (Freeze-thaw)	Class 3
External Fire Performance	Deemed to satisfy. See Commission Decision 2000/553/EC
Reaction to fire	Class A1
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 6%
Carbon Footprint	22kgCO ₂ e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Stock

product	size (mm)	edge	colours available	in stock	m² per pack	no. per m²	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Braemar Ground Flags	400 x 400 x 50	Chamfered	Alto Silver	YES	3.2	6.25	20	397	394
BIM									

BIM - This product is available to download from our website in BIM Level 2 format.

IMPORTANT INFORMATION

A regular maintenance programme should always be established and active for all public spaces to reduce the risk of slip/skid. Tobermore's stunning ground and ground textured finishes are created using a modern diamond grinding process which achieves a premium finish. Ground textured provides a higher level of slip resistance.

Tobermore recommend that you separate product groups using contrasting bands of colour as each product is manufactured separately and may have slight variations in colour. Light coloured blocks emphasise tyre marks and oil spills. It must be accepted that these products will need more maintenance if the overall appearance is to be maintained.

PrimeTop

PrimeTop is the high performance feature which differentiates Tobermore from standard concrete paving. Tobermore's PrimeTop is manufactured with a premium, hard-wearing surface layer which adds significant performance benefits.

PrimeTop Layer


Hard-wearing Surface

The PrimeTop surface layer has a dense composition of finer aggregates, hard sand and a higher percentage of cement. This hardened surface layer has enhanced strength and increased resistance to wear and tear, for both pedestrian and vehicular traffic.

We produce two different material mixes; the PrimeTop layer and a robust base layer formulated for optimum structural performance. Both layers are formed simultaneously, producing an inseparable bond that stands the test of time.

Aesthetic appeal & enhanced weathering

The PrimeTop surface layer contains a high concentration of pigment creating vibrant colour and exceptional UV performance leading to enhanced weathering properties. Tobermore PrimeTop is renowned for its superior long-term retention of colour and visual appeal.

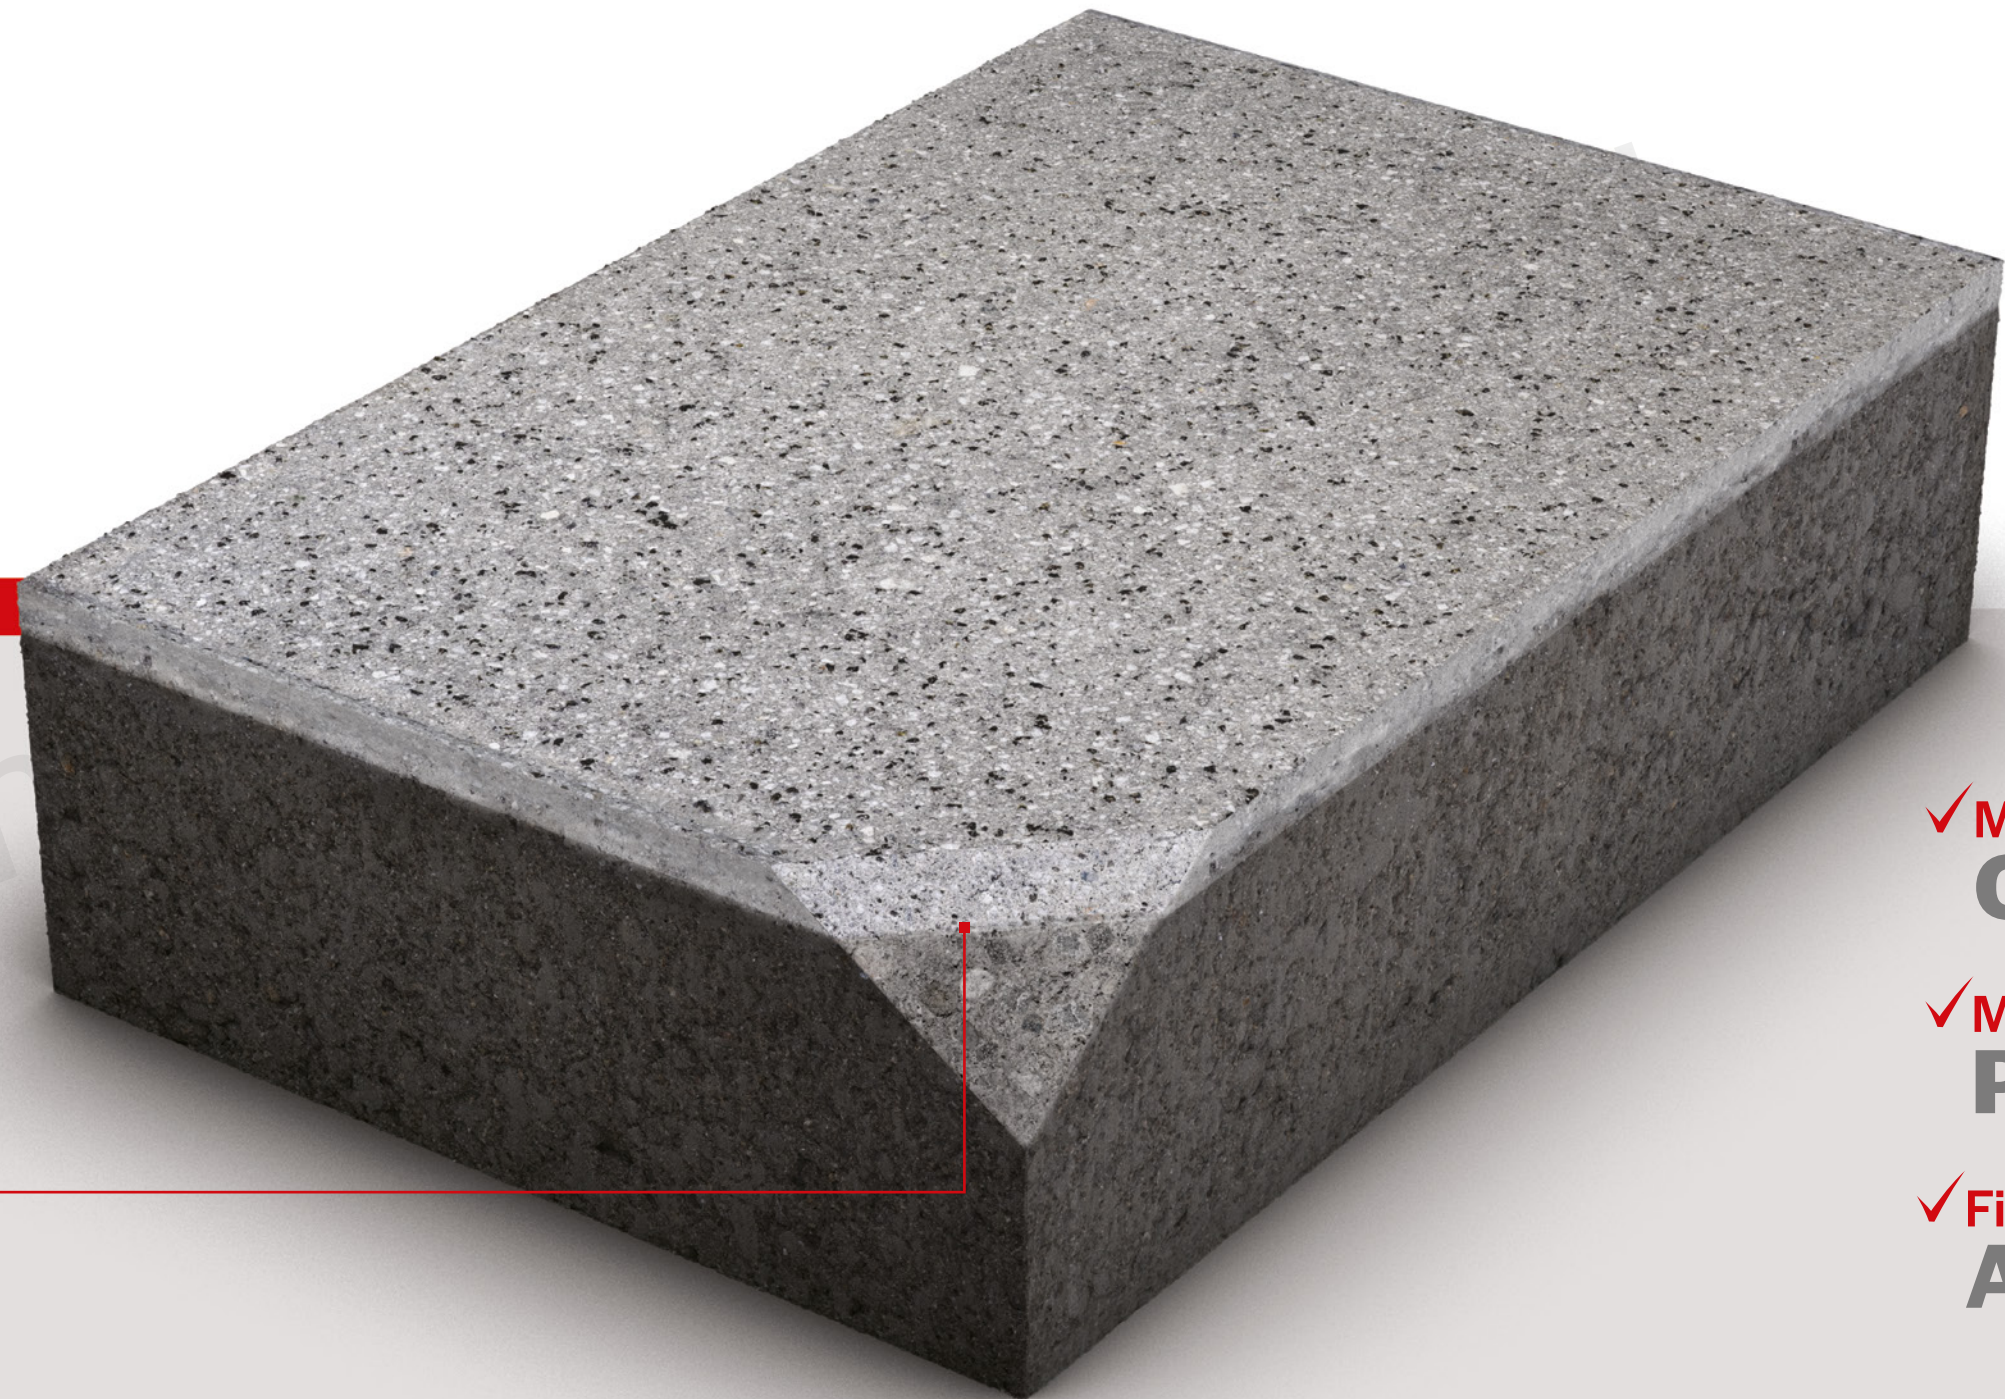

✓ **More
Cement**

✓ **More
Pigment**

✓ **Finer
Aggregates**



COMBATting EFFLORESCENCE

Every aspect of our product's performance is researched and optimised to provide an excellent long-lasting appearance. To meet the challenge of efflorescence, we have invested in manufacturing technology which enables us to produce virtually efflorescence free paving.

Efflorescence is perhaps the single biggest problem encountered with decorative concrete paving products. The cause of efflorescence is simply a chemical reaction between the cement in the concrete and rainwater causing the formation of calcium carbonate. This white, crystalline substance stains the surface and spoils the appearance of the paving.


In the Tobermore manufacturing process, we cure our products in a warm vapour atmosphere for 12 hours, which ensures that efflorescence is dramatically reduced. Moreover, the vapour curing also enhances the colour, improves the strength and cures the products much faster, allowing products to be used almost immediately.



 **Ef-Stop®**
Look for products with the Ef-Stop logo



Competitor's paving

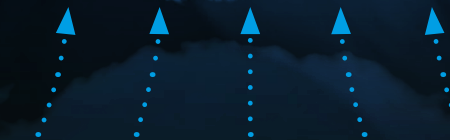

Vapour Cured

The Ef-Stop protection includes an intense vapour curing process. Vapour penetrates to the core of the paver.

100% SUPPORT

ServiceSure is Tobermore's unique package of customer service benefits developed to ensure an efficient, consistent and streamlined experience. This unbeatable, seamless service follows your project from initial enquiry to delivery and beyond, keeping you fully informed at every stage.



Easy Spec

Our specification team is on hand across the UK and Ireland to support you with technical advice, design support and samples. Tobermore's comprehensive website provides additional access to useful information. This is backed up by a package of the industry's leading specification tools including NBS Plus/Create and BIM level 2.




Fast Quote

We always turn around quotes within one working day.



Intelligent Ordering

Every order placed with Tobermore is sense checked on receipt by one of our trusted advisors who will liaise with you directly to ensure quantity, format and delivery details are right first time. All orders will receive an Order Confirmation with clear product and pricing information.

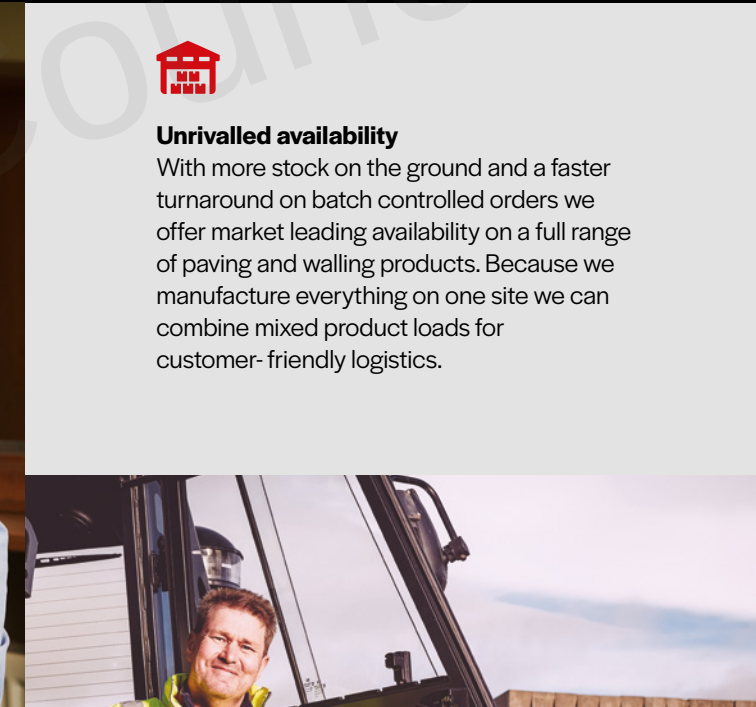

Unrivalled availability

With more stock on the ground and a faster turnaround on batch controlled orders we offer market leading availability on a full range of paving and walling products. Because we manufacture everything on one site we can combine mixed product loads for customer-friendly logistics.



Delivery excellence

You can trust Tobermore to fulfil your order on time and in full as agreed. This industry leading service is proven week in week out and in 2018 we achieved outstanding delivery performance with 99.47% of orders on time and in full.

Gravesham Borough Council

Contact Us

GB: 0844 800 5736

NI: 028 7964 2411

ROI: 048 7964 2411

Email

technical@tobermore.co.uk

sales@tobermore.co.uk

tobermore.co.uk

v1.2

