




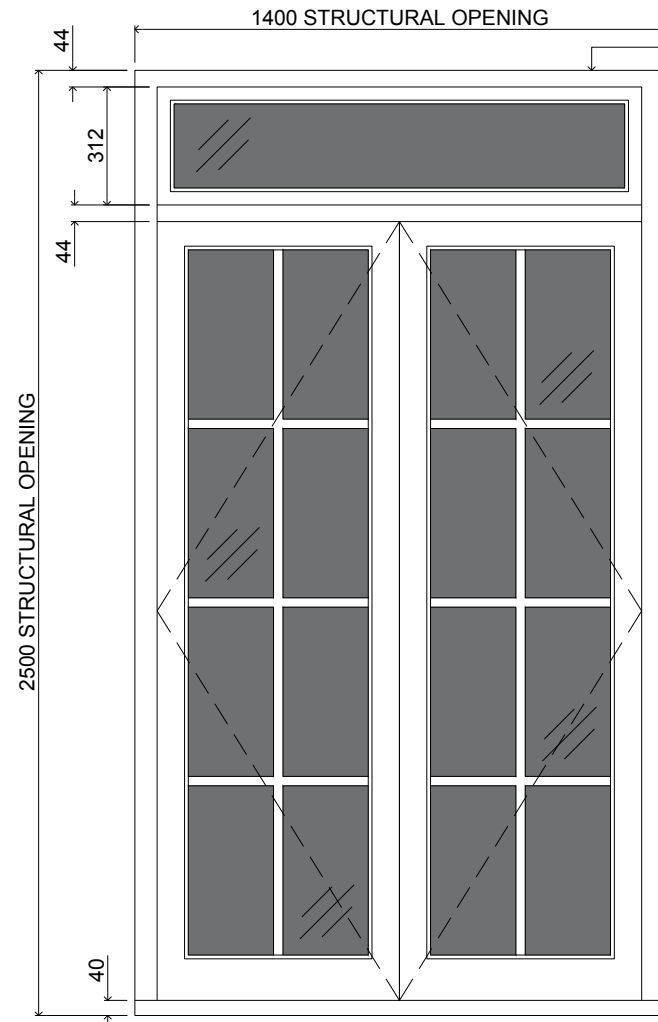


Existing structural opening to remain unchanged. Doors to be measured on site.

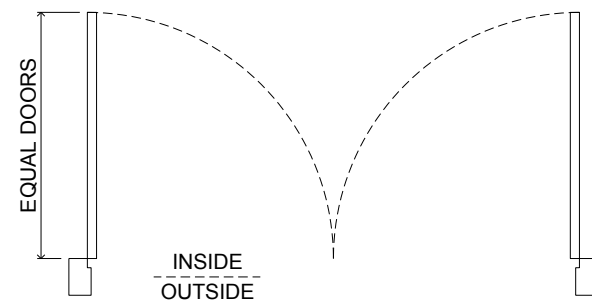

REPLACEMENT EXTERNAL FRONT & REAR DOUBLE DOORS

- Doors measured to the existing opening
- Doors to have 6mm toughened glazing
- Frames and doors to be made of timber and hand painted white on-site
- Draft strips to be finished white to match the doors
- Glazing to be bedded in with putty
- Refer to Floor Plan for door hanging direction

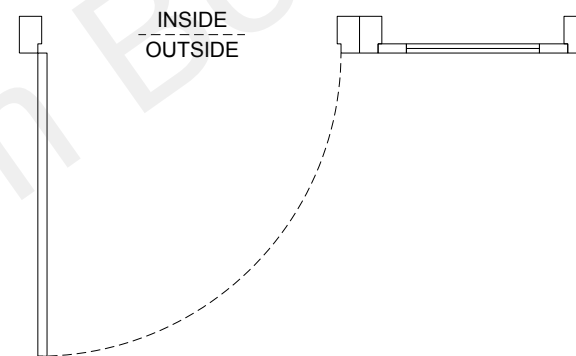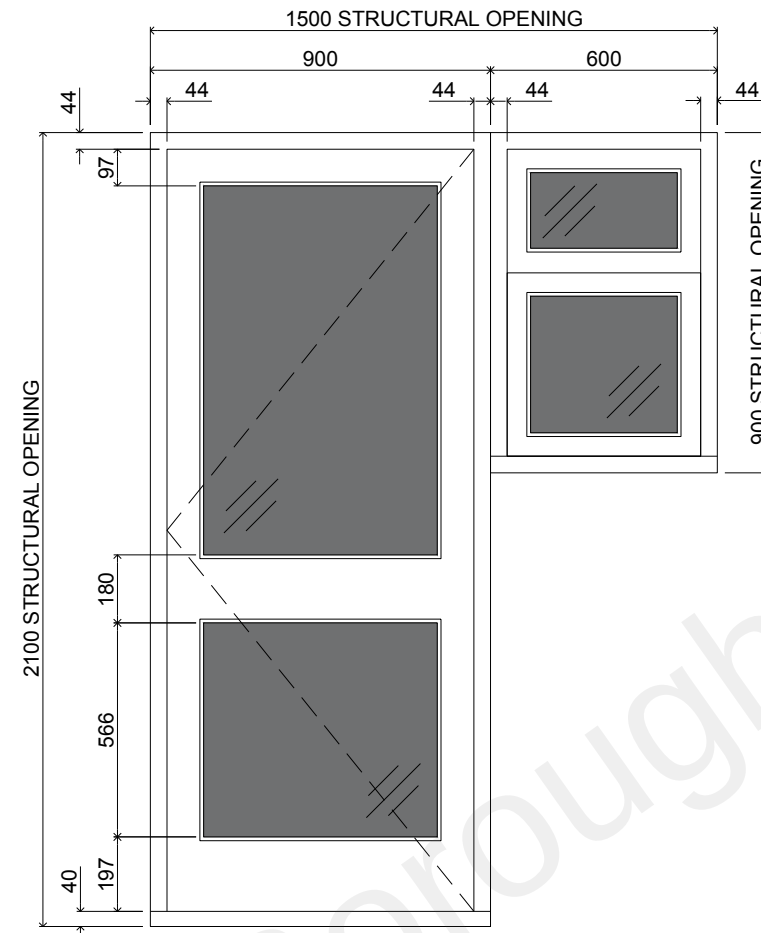

REPLACEMENT EXTERNAL REAR DOOR AND SIDE WINDOW

- Door & Window to be measured to the existing opening
- Glazing to be 6mm toughened
- Frames and doors to be made of timber and hand painted white on-site
- Draft strips to be finished white to match the doors
- Glazing to be bedded in with putty
- Refer to Floor Plan for door hanging direction