



V A L C A N

The Defining Standard

VITRADUAL TECHNICAL INFORMATION



A1 rated to
BS EN 13501-01



Tested to BS8414
& BR135 compliant

CENTRE FOR
**WINDOW AND
CLADDING**
TECHNOLOGY



vitradual®

Non-Combustible Cladding



CONTENTS

- 3. ABOUT THIS MANUAL
- 4. ABOUT VITRADUAL
- 5. KEY FEATURES
- 6. QUALITY
 - Manufacturing Quality
 - Acceptable Variation
 - Warranty
- 8. MATERIAL PROPERTIES
 - Typical Composition
 - Aluminium
 - Dimensions
 - Weight
 - Technical Data
 - Technical Date of Kynar 500 PVDF
- 14. FIRE RESISTANCE

- 16. TESTING CERTIFICATION
- 17. FINISHES
 - Stove Lacquering
 - Other Coating Finishes
- 18. THERMAL PERFORMANCE
 - Thermal Insulating Properties
 - Average Expansion
- 20. INSTALLATION & FABRICATION METHODS
 - Installation Methods
 - Installation Guidelines
 - Cassette Fix
 - Rivet Fix
- 26. MISCELLANEOUS
 - Sustainability
 - Protective Film
 - Handling & Storage
 - Cleaning & Caring

ABOUT THIS MANUAL

This manual has been developed to effectively assist fabricators and contractors to work with Fairview's Aluminium Panel; Vitradual.

Due to the uncontrollable conditions and methods of job scope, as well as the variable skills and judgment of users/installers and the quality of equipment, tools, etc., the suggestions and recommendations contained in this manual are provided without warranty.

The information and recommendations contained herein are believed to be correct at time of publishing 06/05/2021.

Fairview reserves the right to revise the contents of this manual.

ABOUT VITRADUAL

VitraDual is a 2mm or 3mm non-combustible aluminium cladding system manufactured by Fairview that can be installed as riveted or cassette fixed panels.

VitraDual forms part of our range of industry compliant, non-combustible aluminium panel solutions.

The solid aluminium panel is durable and high impact resistant which can be curved and rolled.

VitraDual features the PVDF coating system; well proven for its superior quality, extensive colour range and integrity; unlike traditional 3mm powder-coated aluminium.

Panels are prefinished; the flexibility of PVDF coatings means they do not require fabrication prior to coating like traditional powder-coated cassettes, thus minimising lead-times, damage and costs.

KEY FEATURES



A1 rated to
BS EN 13501-01



Tested to BS8414
& BR135 compliant



LIGHTWEIGHT

VitraDual is incredibly rigid and lightweight and is therefore also easy to install.



HIGH DURABILITY

VitraDual panels are highly durable and impact resistant. They can be used effectively in high traffic areas.



NON-COMBUSTIBLE A1 rated to
BS EN 13501-1 and BR135
compliant



PAINT SYSTEM

VitraDual only uses the highly recognised PVDF KYNAR 500 or FEVE paints known for their high durability, providing the optimum resistance to weather and industrial pollutants.



VERSATILE

VitraDual can be custom designed into a wide range of shapes and dimensions as well as able to be perforated or curved in some applications making it a versatile design choice.



WARRANTY

VitraDual has up to a 30 year warranty when installed by a licensed installer.



MAINTENANCE

Easy to maintain compared to polyester based coatings



EXTREMELY FLAT

Low surface stress, not susceptible to 'oil canning'

QUALITY

MANUFACTURING QUALITY

A dedication to the total fulfillment of our client's and customer's expectations is reflected by a complete quality control system, beginning at the point of specification and continuing through to delivery of the guaranteed products.

All activities are carried out in a manner which:


- Uses the framework of ISO9001 Quality Standards to verify the quality of our systems
- Ensures that our products and services are of the highest standards
- Create continuous improvements to our product through the application of the best quality practices.

ACCEPTABLE VARIATION

WIDTH	± 2.0 MM
LENGTH	± 4.0 MM
THICKNESS	± 2%
BOW	Maximum 0.5% of the length and/or width
SQUARENESS	Maximum 5.0MM
SURFACE DEFECTS	The surface shall not have any irregularities such as dents, scratches and other imperfections in accordance with our quality assurance.

WARRANTY


Warranty can be extended on application, please contact the Valcan team for details.



vitradual®

Non-Combustible Cladding

MATERIAL PROPERTIES

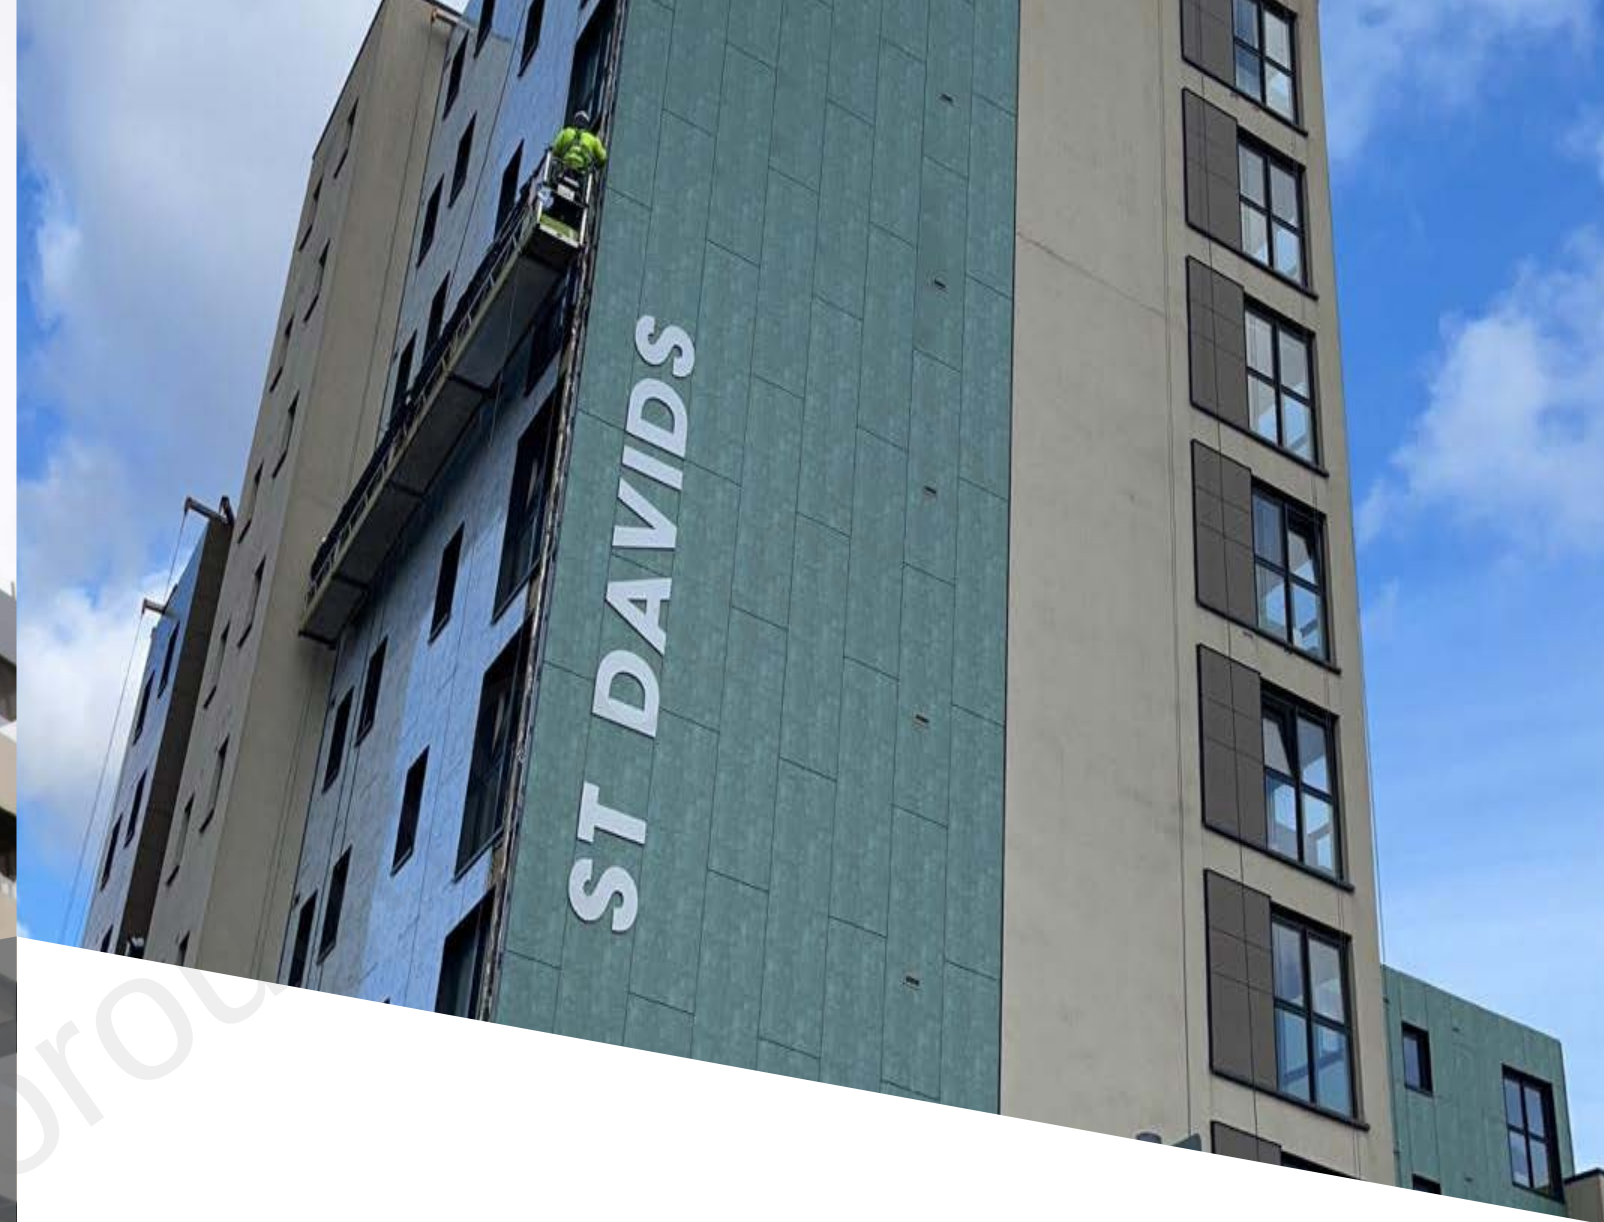


TYPICAL COMPOSITION

1. Protective film
2. PVDF-Kynar 500 coating system
3. 2mm or 3mm Aluminium
4. Rear Coating

The material is rigid, resistant to blows, breakage and pressure, and has high bending, buckling and breaking strengths.

ALUMINIUM

Vitradual is manufactured from 3000 or 5000 series aluminium for machinability and exterior performance, other aluminium grades available as required for projects.

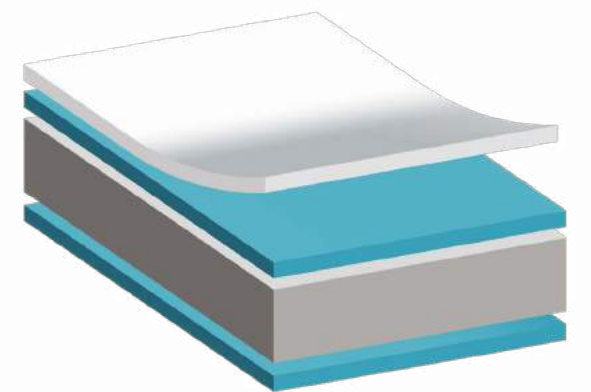

DIMENSIONS

WIDTH	LENGTH	THICKNESS
1250 / 1500	2500	2MM / 3MM
1250 / 1500	3200	2MM / 3MM
1250 / 1500	4000	2MM / 3MM

Custom sizes are available - Please speak to the Valcan Team

WEIGHT

THICKNESS	WEIGHT (KG/M ²)
3 MM	8.13
2 MM	5.42

TECHNICAL DATA

PHYSICAL PROPERTY	VALUE
Density	2.63 G/CM ³
Melting Property	605-650 °C
Thermal Expansion	23.8 x 10-⁶ / K
Modulus of Elasticity	70 GPA
Thermal Conductivity	138 W / MK
Electrical Resistivity	0.0495 x 10-⁶ Ω M
Tensile Strength	210 - 260 MPA
Proof Stress	130 MIN MPA
Hardness Brinell	61 HB
Acoustic Insulation	RW 27

LOAD (KN/M²)	MAX SPAN (M)	
	VITRADUAL 2MM	VITRADUAL 3MM
0.50	1.00	1.50
1.00	0.71	1.06
1.50	0.58	0.87
2.00	0.50	0.75
2.50	0.45	0.67
3.00	0.41	0.61
3.50	0.38	0.57
4.00	0.35	0.53



TECHNICAL DATA OF KYNAR 500 PVDF COATING

CLASSIFICATION	TEST STANDARD	RESULT	REMARKS
Substrate	ASTM D1005	PASS	Aluminium
Flexibility	ASTM D4145 ECCA T7 NCCA 11-19	PASS	1-2T - No Cracking
DFT	ASTM D1400 ASTM D1005 NCCA 11-13, 14, 15	PASS	
Colour Difference	ASTM 2244	$\Delta E < 5$	4,000 HRS
Gloss Meter	ASTM D523	PASS	
Gloss Retention	ASTM D2244	85%	4,000 HRS
Chalking Resistance	ASTM D2244	<8 units	4,000 HRS
Pencil Hardness	ASTM D3363		
Dry Film Adhesion Wet Adhesion Adhesion		PASS PASS PASS	38°C, 24 HRS 100°C, 24 HRS
Reverse Impact Resistance	ASTM D2794	NO CRACKING	12.7 MM x 0.5 KG x 500 MM
Bending/Gardner Impact	ASTM D3281	PASS	Normal
Solvent Resistance	ASTM 2794	PASS	MEK Double Rubs
Acid Resistance	ASTM 1308	PASS	7 Days Soaking in 10% H2SO4
Alkali Resistance	ASTM 1308	PASS	7 Days Soaking in 10% NAOH
Detergent Resistance	ASTM D2248	PASS	72 Hours Soaking in 3% De-tergent
SALT RESISTANCE	ASTM B117	INCLUDES THE FOLLOWING:	
Gloss Retention	ASTM D523	0.8% Change	5,000 HRS
Colour Retention	ASTM 2244	$\Delta E < 0.68$	5,000 HRS
Chalk Resistance	ASTM 4214	Rating: 10	Top Rating - No Chalk (5,000 HRS)
HUMIDITY RESISTANCE	ASTM D714	PASS	2,000 HRS
	ASTM B117	INCLUDES THE FOLLOWING	
Gloss Retention	ASTM D523	NO VISIBLE CHANGE	5,000 HRS
Colour Retention	ASTM 2244	$\Delta E < 0.52$	5,000 HRS
CHALK RESISTANCE	ASTM 4214	Rating: 10	Top Rating - No Chalk (5,000 HRS)
WEATHERING RESISTANCE	ASTM G53	INCLUDES THE FOLLOWING	
Gloss Retention	ASTM D523	6.2% Change	5,000 HRS
Colour Retention	ASTM 2244	$\Delta E < 0.27$	5,000 HRS
Chalk Resistance	ASTM 4214	Rating: 10	Top Rating - No Chalk (5,000 HRS)
CHEMICAL RESISTANCE	ASTM C207	PASS	Mortar, 24 HRS
	ASTM D1308	PASS	10% HCL, 15 MIN
		PASS	70% HNO3 Vapours, 30 MIN
		INCLUDES THE FOLLOWING	
Gloss Retention	ASTM D523	6.2% Change	16 HRS
Colour Retention	ASTM 2244	No Change	16 HRS
Chalk Resistance	ASTM 4214	Rating: 10	Top Rating - No Chalk (5,000 HRS)



FIRE RESISTANCE

In today's Architecture, it is the technical details, as well as the appearance that count; such as sustainability, thermal insulation, and fire performance.

VitraDual is one of the few large format cladding panels that are truly 100% non-combustible achieving A1 when tested to BS EN 13501-1 on any colour and a wide range of substrates. Also tested to BS8414-2 for fire performance of external cladding systems and compliant to BR135 requirements, VitraDual gives the insurers, architects, contractors and building owners peace of mind on product specification. The tested system for BS8414/BR135 provides minimal lateral damage, this means should a fire occur in a room and break out, only a small area of the facade should need replacting.

Visually, VitraDual is similar to traditional composite panel, however what makes it different is the fact that it is constructed from 100% aluminium, rather than combustible material such as polyethylene and fire rated mineral. This makes VitraDual, an ideal product for all applications where non-combustible panels are required; such as high-rise buildings, schools or hospitals.

As with all building products, the use of VitraDual must be authorised by the regulatory body.

The Fire Resistance standards achieved with standard VitraDual are as follows:

VITRADUAL	
TEST STANDARD	RESULT
BS EN 13501-1	A1 / Non-Combustible in any colour
BS8414/BR135	Pass / Compliant



PARAMETER	RESULTS	
	FIRE SPREAD TEST RESULT TIME TS (MIN)	COMPLIANCE WITH PARAMETERS IN ANNEX A BR135:2013
External Fire Spread	> 15 minutes	Compliant
Internal Fire Spread (Cavity)	> 15 minutes	Compliant
Internal Fire Spread (Insulation)	> 15 minutes	Compliant

TESTING & CERTIFICATION

In addition to the extensive BS EN 13501-1 and BS8414 testing, VitraDual has also been accredited by BBA and full system test to CWCT standards.

CWCT tested system consisted of 3mm rivet fixed panels and 2mm/3mm grooved and folded cassette/tray panels using the Vitrafix VF1 Carrier system. System full test pressure was to servicability of 2400pa with a safety of 3600pa.



FINISHES

STOVE LACQUERING

VitraDual only uses the highly recognised PVDF KYNAR 500, or FEVE coating systems known for their high durability. These premium paints provide an optimum resistance to weather and industrial pollution. More than 40 years of South Florida Exposure Testing is continuing to confirm the superior chemical and physical properties of fluoro polymer coatings.

For a full list of standard VitraDual colours, refer to our range of Colour Charts or visit the Valcan website www.valcan.co.uk.

OTHER COATING FINISHES

The VitraDual range also offers the following finishes:

- REPEL - A self-cleaning surface coating
- VITRAART - for personalised design and imagery



THERMAL PERFORMANCE

THERMAL INSULATING PROPERTIES

THERMAL RESISTANCE		
From -50°C to +80°C		
Panel Thickness (MM)	Thermal Resistance 1A M2.K/W	Heat Transmission Coefficient W/(M2.K)
3	0.0069	5.65

AVERAGE EXPANSION

MATERIAL	EXPANSION COEFFICIENT(X10-6/°C)	ELONGATION PER 1000MM T=50°C
VitraDual	23.8	0.0232MM/M/°C
Aluminium	23.8	0.0232MM/M/°C
Stainless Steel	26.7	0.0166MM
Steel	12.2	0.0120MM



vitradual®

Non-Combustible Cladding

INSTALLATION & FABRICATION METHODS



INSTALLATION METHODS

See the VitraDual Installation manual for details.

The VitraDual installation details are provided for conceptual purposes only.

INSTALLATION GUIDELINES

- All sheets should be installed in the same direction as marked on the protective film to prevent possible finish variation.
- As minor colour variation can occur between production lots, it is recommended to place total requirement for a project in one order to ensure colour consistency
- Where aluminium materials come in contact with dissimilar metals, a proper insulator or isolation tape should be applied to insulate between dissimilar materials in order to avoid corrosive and electrolytic action
- For Cassette Fix, the bend-in portions between panel joints should not be caulked before protective film is removed.



CUTTING



VitraDual can be cut with a wall-saw, circular saw, guillotines, flat bed routers and rail saws. The requirements for a circular saw are identical to that for cutting solid aluminium. for more information see the VitraDual Technical Manual or contact the technical team.

THE CUTTING TOOL MATERIAL TO BE CARBIDE TIPPED. THICKNESS 2-4MM	
Tooth Geometry	Trapeze/Flat
Tooth Pitch	10-12MM
Rank Angle	-5° (Negative)
Clearance Angle	15°
Max Cutting Speed	20M/MM



CONTOUR CUTTING

VitraDual panel can be contour cut with CNC routers, copy routers. Coolant may be required dependant on tooling and machine set up.



ROUTING/FOLDING

VitraDual panel can be cold shaped, enabling it to form various shapes and sizes. A bullnose, rectangular or V-shaped groove can be routed on the back of the panel, following potential fold lines. The panel can then be hand folded along this groove, creating a precise and even fold. The outer radius of the fold can be determined by the shape and width of the routed groove.

There must be between 0.7mm and 1mm of aluminium left at the base of the routed groove. Too much material can cause stress and result in a larger radius fold than desired. It will also make folding the panel more difficult and prevent the required fold angle from being obtained.



SHEARING

Shearing can be done with a guillotine. Ensure the blanking tools are padded. Shearing causes a slight roll down along the cut edge of the panel.



PUNCHING

The punching of flat formed parts from VitraDual is performed in the same way as a solid aluminium sheeting, using sharp tools and dies with minimal cutting clearance. Varying shapes may easily be punched with normal aluminium punching machinery. As with shearing, a slight roll down may occur.



ROLL BENDING

VitraDual panel can be bent with a roll-bending machine. Use polished rollers free of imperfections only. Minimum radius of 200mm.



SCREWING

VitraDual can be screwed with conventional stainless steel or galvanised screws for metal. For outdoor use allow for thermal expansion.




RIVETING

Riveting is possible with the usual equipment and solid rivets or blind rivets. For outdoor use allow for thermal expansion.



DRILLING

VitraDual panel can be drilled with centre point twist drills normally used for aluminium or machines common for metals. Drill material: High-Speed Steel (HSS).




BENDING

Bending is possible with a folding table or brake press. The inside bending radius is roughly 2.5 times the VitraDual panel thickness. Use protective foils. For serial production, tests should be made on sample panels.




STUD WELDING

It is possible to stud weld to the back of the VitraDual panel without deforming the face of the panel, this can be used for a non-combustible attachment of stiffeners.

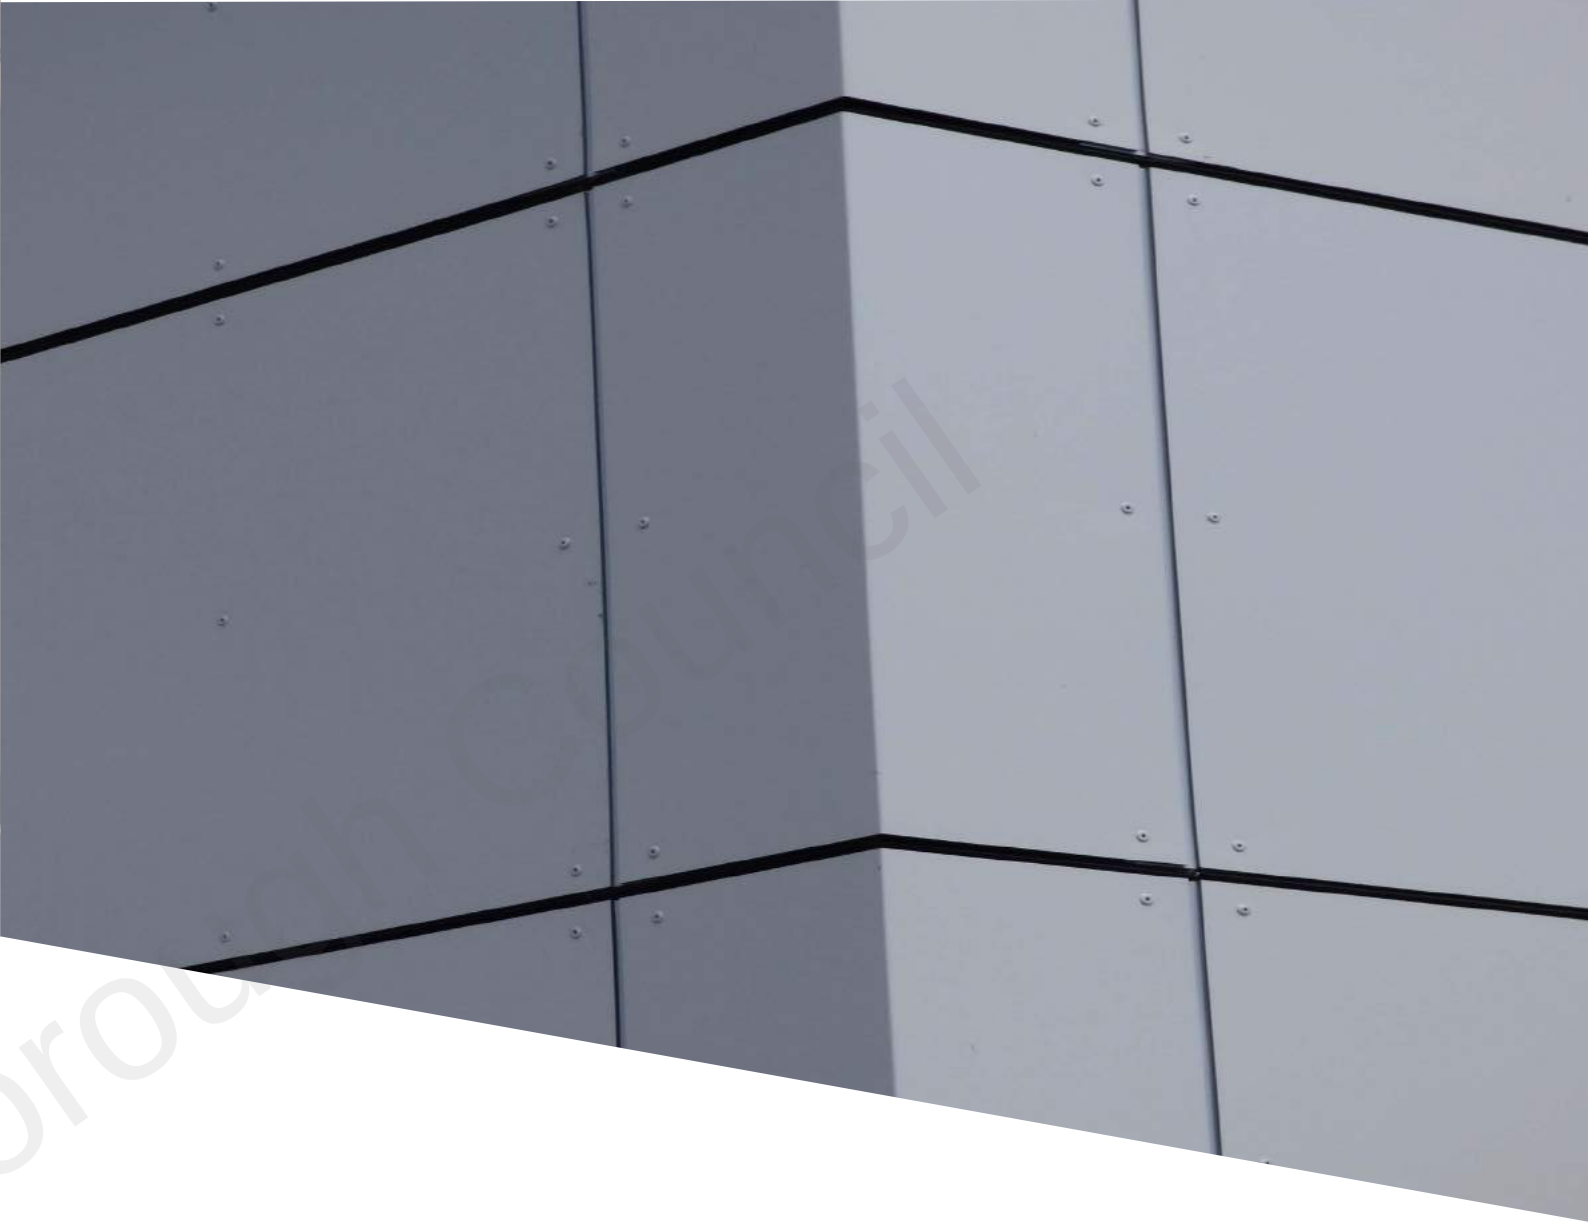


CASSETTE FIX

To obtain a cleaner looking face to the facade, the cassette system utilises folded panels with colour matched fixings installed in the recess where the panel joints overlap. This system utilises the same Vitrafix VF1 system as used on the rivet fix option.

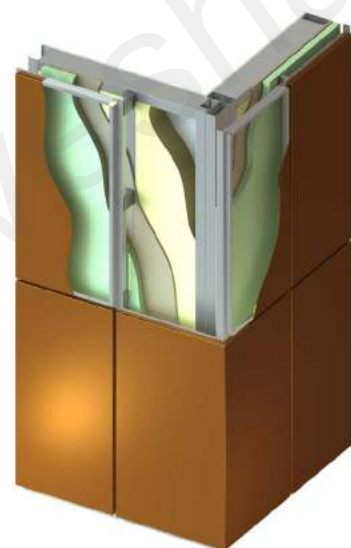

RIVET FIX

Rivet Fix is the simplest and most cost effective way of installing façade panels. This method uses colour matched rivets to secure the panels back to the Vitrafix VF1 carrier frame. The use of colour matched rivets allows a semi discrete installation method.

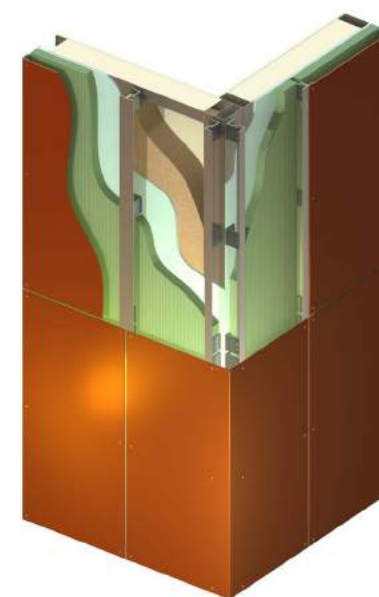

MISCELLANEOUS

SUSTAINABILITY

VitraDual has been designed with an expected performance life of over 50 years. All Fairview products have been developed with the health of the environment and community in mind.

As part of our commitment to using recyclable or reusable materials wherever possible; all VitraDual is 100% recyclable.

PROTECTIVE FILM

- Make sure no damage will occur to the panel following removal of protective film.
- Remove protective film within 45 days of installation to avoid glue residuals on panel surface due to weathering.
- Do not apply PVC tapes, polyurethane sealant or Silicone sealant onto VitraDual protective film. The plasticiser contained in these materials can penetrate the protective film and cause a gloss change in the coating.
- Do not apply spray paint or permanent marker to the film as the colour may penetrate the film and affect the panel.



HANDLING & STORAGE

- Considerable care should be taken in the handling of Vitradual.
- Vitradual panels are sensitive to impact, particularly shocks from small, hard objects, which can dent the aluminium cover sheet.
- A minimum of two people should be used when sliding large sheets to avoid scratching.
- To prevent surface damage when stacking Vitradual, there should be nothing between the panels.
- Vitradual should be stored in a cool and dry area where temperature is relatively stable.
- Pallets of Vitradual should be stored horizontally with adequate support to prevent sagging.
- Stacked pallets should be identically sized and not more than four (4) pallets high.

CLEANING & CARING

RECOMMENDED CLEANING AGENTS

- Mineral Spirits
- Organic Cleaners
- PH-Neutral Solvents

KEEP YOUR WARRANTY FRESH

Maintaining your VitraDual finish is an important component to maintaining your warranty. Document each time you clean your VitraDual panels. Cleaning frequencies are based on project location and are provided in the warranty.



ough Council



Inherently Better



Total Assurance



The Defining Standard



Dunball House,
Woodlands Court Business Park,
Bristol Rd,
Bridgwater, Somerset
TA6 4FJ

+44(0)1278 428 245
enquiries@valcan.co.uk
www.valcan.co.uk



V A L C A N

The Defining Standard