




Hever court Care Home
Goodwood Crescent
Gravesend
DA12 5EY

Materials for Planning Condition no. 6. – Rev A
Jan 23
Planning ref:- 20211215

Condition 6 - Materials

One – Brick work


The majority of the external new wings will be formed in facing brick. Generally the brickwork will be in common bond. However the scheme also includes panels of stack bonded brick all as on consented drawing 2327/10.

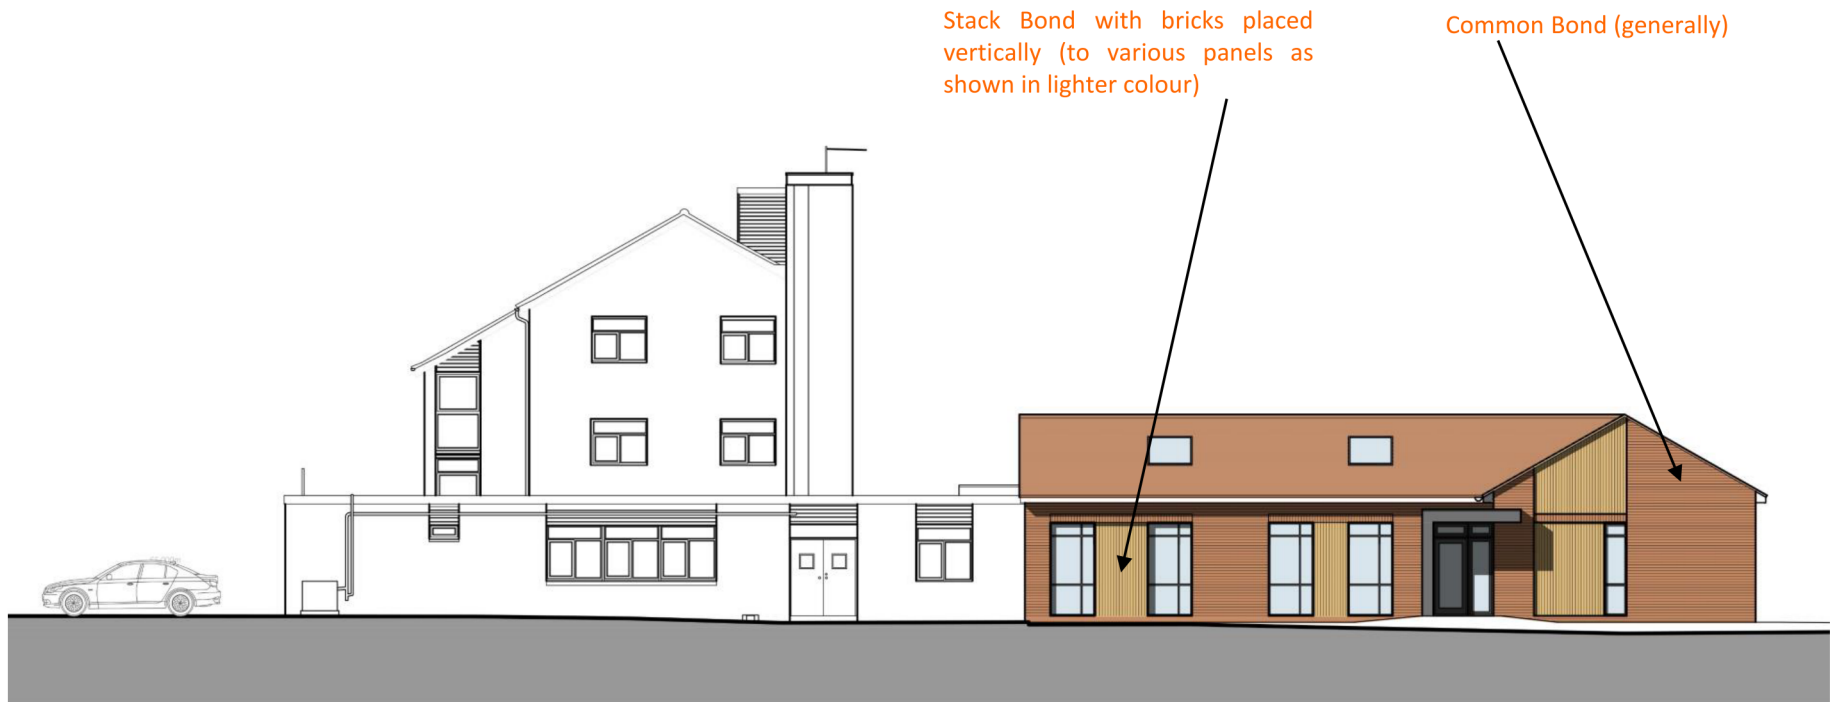

One – Brick work

COMMON


The general common bond brick is specified as Ibstock Capital Brown Multi Stock bricks with Grey flush pointing as previously approved.

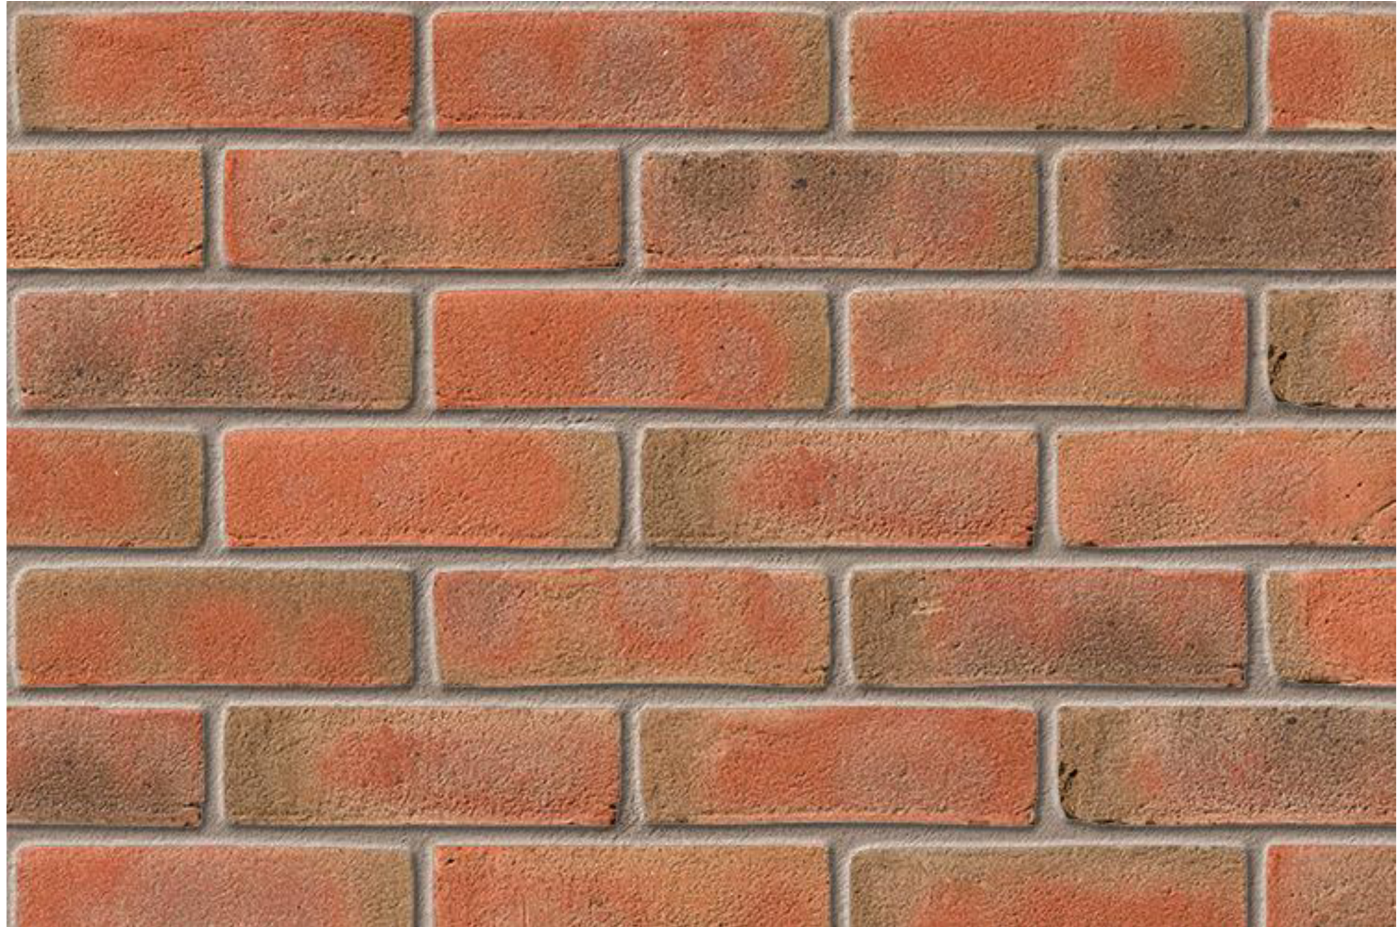

One – Brick work

STACKED panels

The stack bond brick is specified as Ibstock Capital Brown Multi Stock bricks with Grey flush pointing.

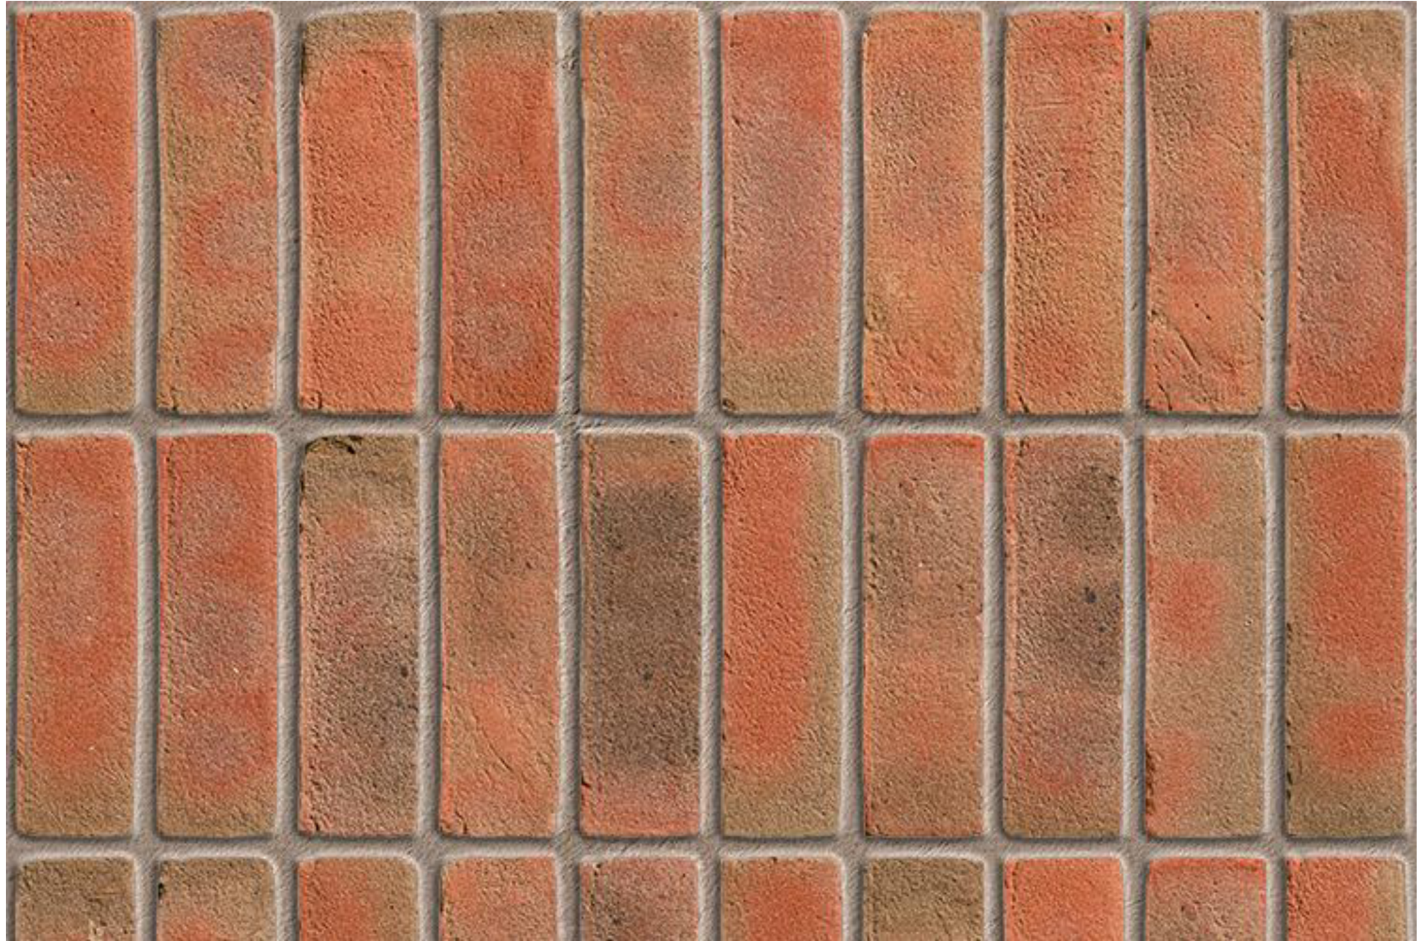


TWO – Cladding

The approved planning drawings showed grey Zinc cladding. This will be formed in the Rheinzinc Graphite Grey. The panels will have a standing seam at its edge and the centres of these seams will be approx. 430mm



Three – Render

The courtyards contain small areas of Render finish. These will be formed using Silkolitt by K-Render and finished in white. This is a standard Silicone render product.

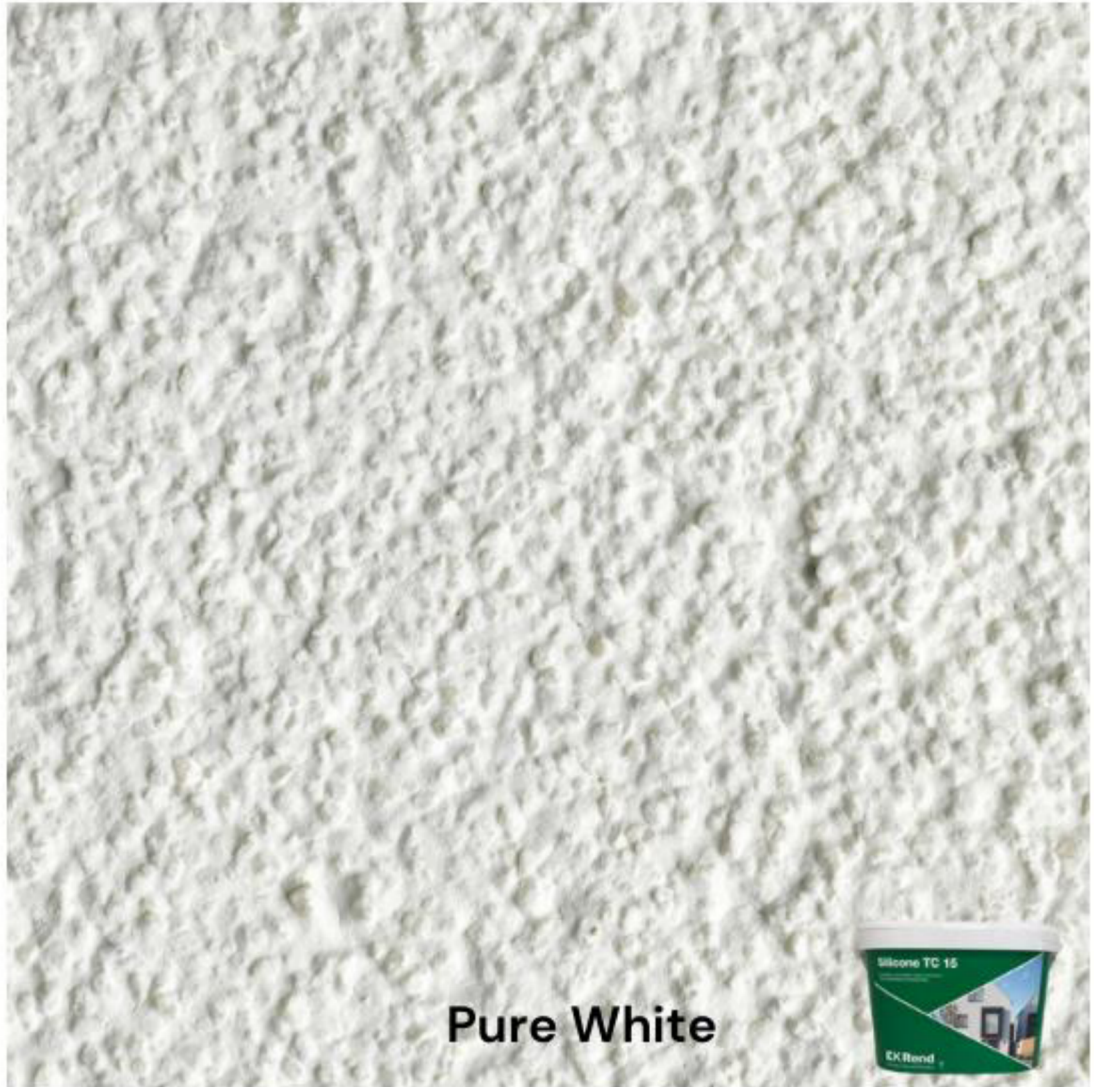

Four – Pitched roof

The roofs are a mixture of pitched and flat roofs.

The pitched roofs will be finished with Redland Duoplain tiles in Rustic Brown.



Five – Flat

The roofs are a mixture of pitched and flat roofs.

The flat roofs will be finished with Sarnafil single ply membrane adhered to tapered insulation and with a Lead Grey finish (Sika colour no. 9500).



Six – Soffits

The soffits of the roof and some cheeks will be finished using Rockpanel Woods. The planks will be a mixture of Marble Oak, Ceramic Oak, Caramel Oak and Rhinestone Oak.



Rhinestone Oak



Caramel Oak



Ceramic Oak



Marble Oak

