

NEW 450mmØ
INSPECTION CHAMBER




FELT TO BE TAKEN BEHIND
TILES A MINIMUM 450mm

CONNECTION BETWEEN FLAT
D PITCHED ROOF TO BE
CHECKED WITH INSULATION
AVOID COLD BRIDGE



THE OCCUPIERS SHOULD BE PROVIDED WITH DOCUMENTATION
ALLOWING THEM TO USE AND MAINTAIN THE FIRE ALARM

● DENOTES MAINS WIRE LINKED HEAT DETECTOR WITH BATTERY BACK UP AND A SEPARATE FUSE ON THE DISTRIBUTION BOARD

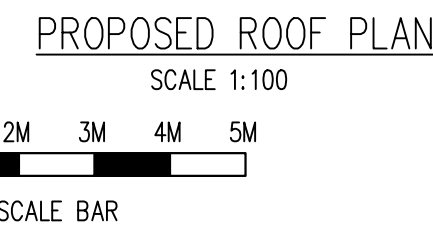

Drawing No.	Rev.
1-HAYES-CLOSE-02	A