



This drawing remains the Copyright
of the architects and may not be
reproduced in whole or in part
without their written permission

solid brickwork with NHL3 hydraulic lime
mortar. Joints to be square to the face of
the brick and slightly recessed 2-3mm
with a brushed finish to expose the
aggregate.

Re-use existing bricks where-ever
possible. Allow for carefully removing
existing bricks, removing mortar and
setting aside for re-use

Ensure that the bricks are re-used in
their original location

Obtain samples of red 'rubber' bricks to
match existing bricks in colour size &
texture. Obtain approval for use
projection with corbel bricks to replicated

MORTAR


NHL3 hydraulic lime mortar to be used.

Joints to be square to the face of the
brick and slightly recessed 2-3mm with a
brushed finish to expose the aggregate.

BONDING

To match existing, use photographs to
assist. Note the main building is laid in

Flemish bond but the parapet wall
appears to have a mix of bonds. build up
in Flemish bond to match the majority of
the existing wall.

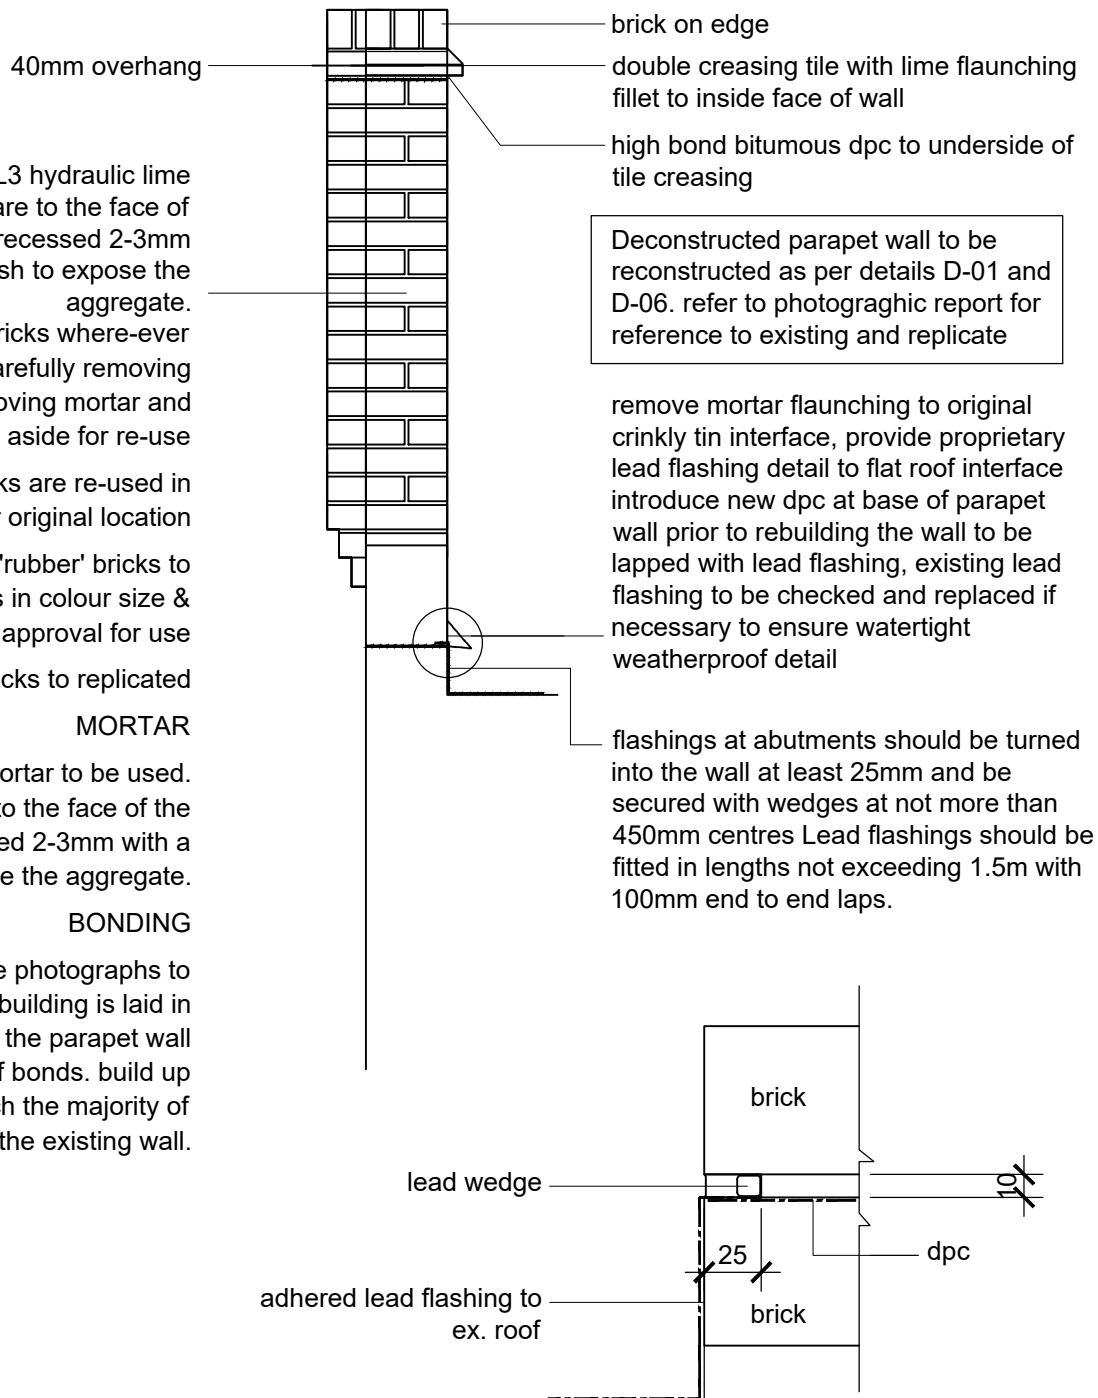

DAC

Architects

21 Stone Street,
Gravesend, Kent, DA11 0NP
Tel: 01474 566996
Fax: 01474 320374
Design@DACarchitects.co.uk

CLIENT
GADS HILL SCHOOL

PROJECT
GADS HILL PLACE

TITLE
West boundary parapet wall detail

SCALE
1:20

DRAWN BY
OWN UP

PROJECT NO.
5516

DATE
31/03/26

DRAWING No. REVISION
D-06 A