



Land at Osney Way, Chalk

Daylight and Sunlight Assessment for Planning

Job No: 3146
Issued: November, 2021
Issue: 1



Contents

1.0	Introduction.....	3
2.0	Project Summary.....	4
3.0	Methodology.....	5
4.0	Modelling & Data Sources.....	6
5.0	Window Schedules.....	7
6.0	BRE Guidance Targets.....	9
7.0	Daylight Impact Results.....	10
8.0	Sunlight Impact Results.....	11
9.0	Sunlight to Neighbouring Gardens.....	13
10.0	Conclusions.....	14

Document Control

Originator

Ollie Westover

Date

01.11.21

Signature

Checker

Bernice Waterman

Date

01.11.21

Signature

1.0 Introduction

- 1.1 This daylight and sunlight assessment has been prepared to support a planning application for the proposed redevelopment of the site at Osney Way, Chalk.
- 1.2 The report assesses the proposals in respect of daylight, sunlight and overshadowing matters, having regard to industry standard guidance. The report concludes that the proposal is acceptable and in accordance with planning policy requirements in relation to daylight and sunlight.
- 1.3 There is no existing specific National Planning Policy relating to the prospective impacts of developments on daylight and sunlight on their surrounding environment.
- 1.4 However, the BRE Report 'Site Layout Planning for Daylight and Sunlight: A Guide to Good Practice' is the established National guidance to aid the developer to prevent and/or minimise the impact of a new development on the availability of daylight and sunlight in the environs of the site. It has been developed in conjunction with daylight and sunlight recommendations in BS 8206: Part 2: 'Lighting for Buildings - Code of Practice for Daylighting'
- 1.5 This reference document is accepted as the authoritative work in the field on daylight, sunlight and overshadowing and is specifically referred to in many Local Authorities' planning policy guidance for daylighting. The methodology therein has been used in numerous lighting analyses and the standards of permissible reduction in light are accepted as the industry standards.
- 1.6 Gravesham Borough Council's Local Plan Core Strategy Policy CS19 also requires the "safeguarding of residential amenity in terms of.....daylight and sunlight"

2.0 Project Summary



Site Location



- 2.1 The site is to the east of Osney Way, Chalk and is currently occupied by two rows of single-storey garages.
- 2.2 It is bounded to the east by Chalk Parish Hall, a car park to the north and residential units to the south and west.
- 2.3 The proposal is for the demolition of the existing buildings and the construction of a terrace of 4no. 3-storey terraced dwellings. Planning consent exists already for a similar development of 3 houses.
- 2.4 The potential impacts on the residential neighbours to the south and west of the site have been assessed for this analysis. The impacts on the Parish Hall have also been included.
- 2.5 Other neighbours do not have windows facing the site or are sufficiently far away as to not warrant assessment.
- 2.6 Further details on the location of neighbours and their windows are given in Section 5.0

3.0 Methodology

3.1 For this analysis, we have undertaken the most common calculations for the change in daylight and sunlight to existing buildings, as recommended in BRE Digest 209. These are:

- **Vertical Sky Component (VSC) for daylight**
- **Annual Probable Sunlight Hours (APSH) and Winter Probable Sunlight Hours (WPSH) for sunlight**

3.2 The VSC method measures the general amount of light available on the outside plane of the window as a ratio (%) of the amount of total unobstructed sky viewable following introduction of visible barriers such as buildings. The maximum value is just under 40% for a completely unobstructed vertical wall.

3.3 The VSC is calculated using computer simulation under a CIE overcast sky. This works by simulating the amount of visible sky from the centre point of each window. It is not affected by orientation and so all potentially affected windows are assessed.

3.4 Annual Probable Sunlight Hours (APSH) and Winter Probable Sunlight Hours (WPSH) are a measure of the amount of potential direct sunlight that is available to a given surface. APSH covers sunlight over the whole year and WPSH from September 21st to March 21st. The number of total available hours is calculated from a data file in the software, built up over a number of years of actual weather data records.


3.5 Only windows which face within 90° of due south need be assessed for sunlight.

3.6 APSH can also be used to assess the impact on external spaces such as gardens. In This is looked at in Section 9.


4.0 Modelling & Data Sources

- 4.1 The first stage of the analysis is to create the analysis model of the existing site condition and the proposal. This allows us to analyse the impact of the proposal when compared to the existing condition.
- 4.2 2D drawings and a 3D model of the site as existing and proposed have been provided by the design team. These drawings are used to construct a 3D analysis model which is exported into the specialist daylight software. Calculations are then run, for both existing and proposed scenarios.
- 4.3 Sufficient detail is added to the model for the analysis. In accordance with BRE recommendations, trees and foliage have been omitted from the calculations.
- 4.4 Information on the properties has been provided to us by the design team in the form of drawings and photographs of the site and surroundings.
- 4.5 Web-based mapping sources and planning records for neighbouring buildings have also been used.
- 4.6 Although a full assessment of daylight and sunlight within the proposal itself is not considered necessary in this instance, it is clear from the proposed drawings that the dwellings themselves will have sufficient levels of daylight, in excess of the standards in BS8206-2:2008.
- 4.7 Concern has been raised about the provision of daylight to the bedrooms, but these rooms have the lowest expectation in BS8206 (only 1% ADF) and this will easily be exceeded.
- 4.8 In addition, each dwelling is provided with a rear garden with plenty of southerly aspect, and these spaces will easily meet the BRE guidance for having 2 hours of direct sunlight over 50% of their respective areas. The front court receives 2 hours of direct sunlight over 75.4% of its area on March 21st.

5.0 Window Schedules

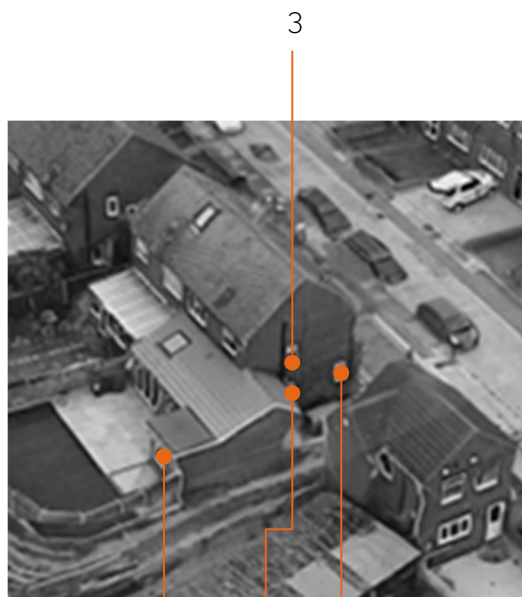

3 Osney Way

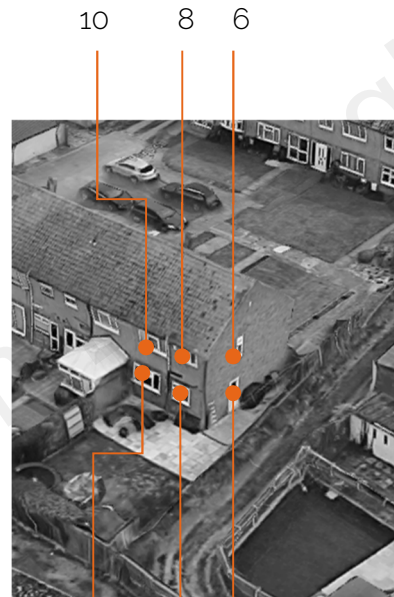


7 Pirrip Close



1 Osney Way

NH = serves non-habitable space.

5.0 Window Schedules

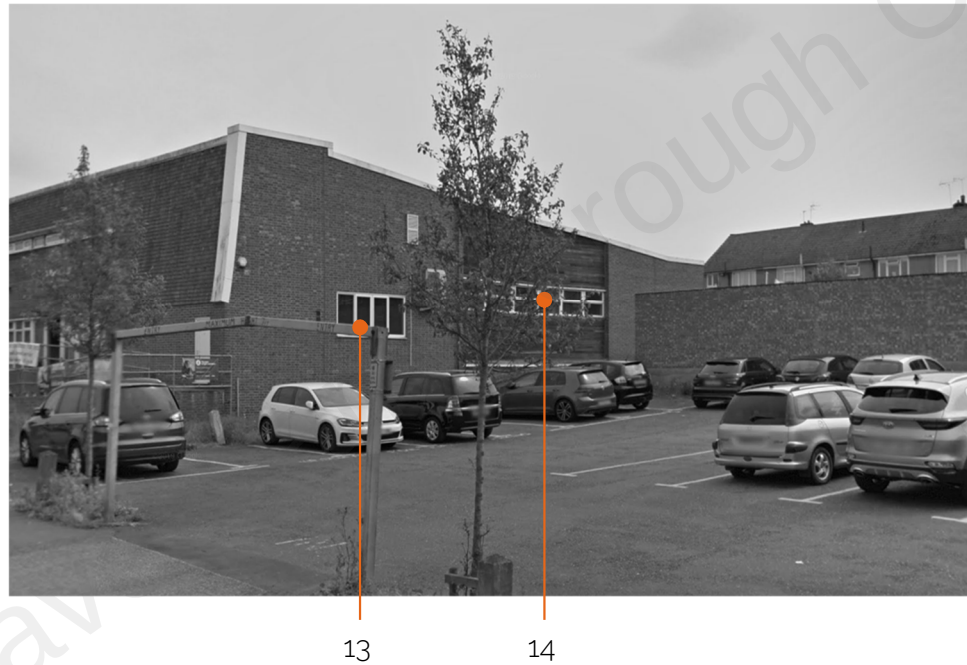

Chalk Parish Hall

6.0 BRE Guidance Targets

6.1 The reference document for this analysis, BRE Digest 209, gives the methodology for undertaking the calculations. It also provides benchmark figures for the acceptable reduction in the daylight on existing properties which might be affected by development.

6.2 Specifically, the guidance gives figures for the VSC and APSH, as a percentage reduction that is "permissible" for the effect on existing windows.

6.3 It is worth noting the following statement in the Guidance introduction:

- "The guide is intended for building designers and their clients, consultants and planning officials. The advice given here is not mandatory and this document should not be seen as an instrument of planning policy. Its aim is to help rather than constrain the developer.
- Although it gives numerical guidelines, these should be interpreted flexibly because natural lighting is only one of the many factors in site layout design."

6.4 The relevant BRE recommendations for daylight and sunlight are:

- The Vertical Sky Component measured at the centre of a window should be no less than 27, or if reduced to below this, no less than 0.8 times the former value.
- The window should receive at least 25% of available annual sunlight hours and more than 5% during the winter months (September 21st to March 21st), or, where this is not the case, 80% of its former value.

7.0 Daylight Impact Results

7.1 The Vertical Sky Component has been calculated for each of the 14 assessed windows for both the existing and proposed conditions.

7.2 As can be seen in the results below, all windows retain 80% of their current values.

7.3 The scheme is therefore compliant with BRE recommendations in relation to daylight impacts.

Vertical Sky Component			
Window	Existing VSC	Proposed VSC	% Retained
1	35.96	33.346	92.73%
2	38.355	37.087	96.69%
3	38.65	36.770	95.14%
4	33.004	28.055	85.00%
5	28.839	26.110	90.54%
6	25.552	24.781	96.98%
7	19.219	17.255	89.78%

Vertical Sky Component			
Window	Existing VSC	Proposed VSC	% Retained
8	33.5	31.864	95.12%
9	27.878	26.201	93.98%
10	23.08	22.785	98.72%
11	36.072	35.89	99.50%
12	33.068	31.305	94.67%
13	36.754	31.126	84.69%
14	37.429	30.65	81.89%

8.0 Sunlight Impact Results

8.1 BRE guidance states that only windows which face within 90° of due south need be assessed for sunlight provision. In this instance, 3 windows fall into this category.

8.2 . The Annual Probable Sunlight Hours has been calculated for each of these windows for both the existing and proposed conditions using the methodology described previously, both over the whole year, and through the "winter months" (September 21st until March 21st)

8.3 The BRE guidance states that the sun lighting may be adversely affected if the centre of the window:

- Receives less than 25% of annual hours or less than 5% of winter hours
- and
- Receives less than 80% of its current sunlight hours during either period
- and
- Has a reduction in sunlight over the whole year greater than 4% of annual probable sunlight hours.

8.4 It is clear from the wording of the above that all three clauses need to be met to qualify as an adverse impact. Thus, if the window does not meet any one of these criteria, the impact is acceptable.

8.5 The results below show that the assessed windows retain 25% of annual hours and also 5% of available winter hours, or, where this is not the case, 80% of existing hours both annually and over the winter months.

8.6 The scheme is therefore compliant with BRE guidance in relation to sunlight impacts.



8.0 Sunlight Impact Results


Annual Probable Sunlight Hours			
Window	Existing Hrs Received	Proposed Hrs Received	Percentage Retained
4	23.65%	23.65%	100.00%
13	56.42%	41.06%	N/A
14	57.87%	35.25%	N/A

Winter Probable Sunlight Hours			
Window	Existing Hrs Received	Proposed Hrs Received	Percentage Retained
4	4.99%	4.99%	100.00%
13	20.31%	8.50%	N/A%
14	21.73%	9.69%	N/A%

9.0 Sunlight to Neighbouring Gardens

- 9.1 Residential gardens are generally assessed using the sunlight hours test, but only on March 21st. The guidance describes a well lit space as being one which receives at least 2 hours of direct sunlight on this date over 50% of its area.
- 9.2 BRE guidance also uses the "80%" rule for this test, whereby the effects are considered acceptable if the remaining sunlight is in excess of 80% of the existing level. This clause applies if the space is reduced to less than 50% of the area well sunlit.
- 9.3 The gardens of the nearest neighbouring dwelling to the west was assessed using this method as identified to the left. It is not anticipated that there will be any impact on other neighbouring gardens.
- 9.4 As can be seen, the neighbouring gardens retain in excess of 80% of current sunlight levels and so the scheme is compliant with BRE recommendations.

G1

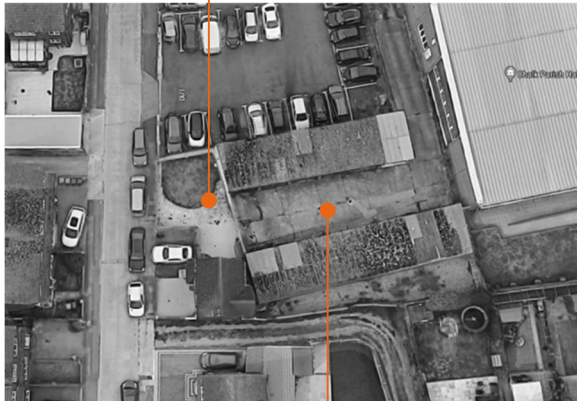

Site Location

Amenity Sunlight Hours				
Garden	Existing Area Receiving 2 Hours	Proposed Area Receiving 2 Hours	% Retained	
G1	65.5%	56.7%	86.56%	

10.0 Conclusions

10.1 Using industry standard methodology, we have made numerical analyses to ascertain the effects of the proposal at Osney Way, Chalk and the levels of change in daylight and sunlight for the windows of the neighbouring properties.

10.2 The main criteria used in this analysis to show compliance are the Vertical Sky Component for daylight impacts and Annual and Winter Probable Sunlight Hours for sunlight impacts

10.3 As has been shown, the effect on VSC is within the 80% guidance value in all cases.

10.4 There will therefore be no adverse impact on neighbouring residents in terms of daylight.

10.5 In terms of sunlight, all windows retain 25% of annual hours and also 5% of available winter hours, or, where this is not the case, 80% of existing hours both annually and over the winter months.

10.6 The neighbouring garden to the west retains in excess of 80% of its area receiving 2 hours or more of direct sun on March 21st.

10.7 The scheme is therefore compliant with BRE guidance in relation to sunlight impacts.

10.8 From a planning perspective therefore, it is the conclusion of this report that the proposed development is entirely acceptable for planning, in daylight and sunlight terms.

T16 Design Ltd.

01206 572452

info@t16design.com

www.t16design.com

This report has been prepared for the exclusive use of the commissioning party and may not be reproduced without prior written permission from T16 Design. All work has been carried out within the terms of the brief using all reasonable skill, care and diligence. No liability is accepted by T16 Design for the accuracy of data or opinions provided by others in the preparation of this report, or for any use of this report other than for the purpose for which it was produced.

© 2021 - T16 Design Ltd.

