SPECIFICATION NOTES - REFER ALSO TO THE TENDER DOCUMENT.

1.0 Setting out

1.1 Planting shall be set out exactly as shown on the drawing, and measured from existing fixed points. Curved beds shall be set out using radii scribed on the ground using two pointed stakes and a line between, or with site marker paint. The junction between convex and concave curves shall be cut to form a smooth and even flowing line. Check that all setting out conforms to the plan before cultivation and planting works are carried out. Failure to do so may result in rejection of the work by the landscape architect and may require amendment at the contractor's expense.

1.2 All planting beds shall be a minimum of 1 metre wide, except where there is insufficient space, due to the constraints of walls and path edgings and their foundations. With narrow beds between walls/ fences and path edgings, ensure that the bed has space free from concrete footings before planting. If the bed is sealed with concrete, then the landscape contractor shall contact the site manager or landscape architect to determine if footings are excessive and can be reduced or else, the bed can be paved. The width of all beds will be checked by the inspecting landscape architect and where the width is not as drawn, the contractor shall re-cultivate them to the specified width at his own expense.

2.0 Ground preparation

2.1 Pre-planting herbicide application- Apply by suitable spraying apparatus, an approved translocated systemic herbicide to the manufacturer's instructions and to 1997 Control of Pesticides Regulations and 2020 COSHH regulations on all beds, except those which are both weed free and are to receive agrotextile sheet mulch. Spray immediately if any weeds are present. If no weeds are showing but planting is delayed, spray after one month following cultivation, to allow dormant seed to germinate. All spraying shall be carried out by skilled and qualified operatives, using protective clothing, in suitable weather (no wind) and any damage caused by spray drift, from incorrect usage or spillage, shall be rectified at the contractor's own cost. Do not spray near a water body. Repeat as necessary to ensure complete kill and rake off all dead material from site.

2.2 Carry out the following works to the existing topsoil on site to ensure it Conforms to BS 3882:2015, being free from rocks larger than 50m diameter, concrete, all roots, wire, brick, and have less than 20% clay. Allow for pre-application of herbicide as above. Fertilise with 100g per meter square of Horticase CRF (16-8-12) slow release fertilizer, in accordance with the manufacturer's instructions. For beds less than 5 meters in width, fork over thoroughly or machine rotovate soil to a depth of 450mm, ensuring that the subgrade and topsoil are completely broken up and free draining, relieving any compaction. For beds greater than 5 metres in width, break up the subgrade and topsoil using a tractor mounted subsoiler or ripper at 500mm centres to a depth of 500mm,except where there are services, or within 10 meters of tree stems or 3 meters of existing hedges. Do not rip areas where roots greater than 10mm diameter are encountered.

2.3. Determine before submitting a tender, the extent of support from the site manager with ground preparation: ensure soil of all planting beds is graded to a level 65mm below adjacent grass or paved surfaces, within 400-600mm of edges to ensure bark or wood chip mulches are retained. Where grass is proposed adjacent to paving, then the soil level shall be flush with the adjacent paved surfaces, to receive rain water run off. The landscape contractor is responsible for ensuring that the final product conforms to the specification even where the developer and/or main contractor have failed to supply and spread topsoil to the necessary level. The landscape contractor shall allow for adjustment of levels, as specified above, including for re-grading subsoil and topsoil. Where beds are sloping, ensure that topsoil is graded to the specified levels below pavement & grass surfaces within 400mm of the edges of the bed. This is to allow for sheet mulch and bark or wood chip mulch so that mulch does not spill out on to pavements and also to allow surface water to drain from paths on to planted areas.

2.4 Sloping ground that is shown to be turfed where there is paving adjacent to it topsoil levels of the grass areas shall be graded to finish flush with the finished pavement level to allow surface water to drain from pavements to soft areas. Soil of grass areas should therefore never be proud of paved areas. Soil levels more than 10 mm below pavement edges will cause mower damage on cutting.

2.5 Imported topsoil (where specified and sanctioned by the employer) for making up ground, shall conform to BS 3882: 2015, and be free from rocks (over 50mm diameter), concrete, roots, wire and brick, and have less than greater than 20% clay. Such soil shall be cultivated as set out above. Representative samples shall first be approved by the landscape architect before being supplied to site. No imported soil shall be supplied to site without a written instruction.

3.0 Planting

3.1 All planting must be carried out in accordance with the tender document, and accompanying drawings. Refer to the tender document for the preparation of existing topsoil and required depths for planting, turfing, and trees, and also for contractual maintenance requirements.

3.2 No substitutions will be accepted without the prior agreement of the inspecting landscape architect. The contractor shall replace at once at his own cost any stock size, species or variety of plant which has not been specified on the planting plan and schedule, unless via prior written agreement, a substitution has been agreed by the inspecting landscape architect. All plants shall be true to size specified in the schedule of plants and associated notes. (2L pots are 17cm diameter and 13cm deep, 3L pots are 19cm diameter and 15cm deep, 5L pots are 22.5cm diameter and 18cm deep, 10L pots are 28cm diameter and 22.5cm deep, 15L pots are 33cm diameter and 30cm deep, 20L pots are 38.5cm diameter and 35cm deep, 30L pots are 41cm diameter and 38cm deep, 40L pots are 50cm diameter and 45cm deep, 50L pots are 55cm diameter and 50cm deep).The pot sizes will be checked on site to ensure compliance with those specified. Pots will be rejected if shrubs are supplied of a size which are not fully grown into the pot e.g. a 9cm plant recently potted into a 3L container. All shrubs, shall possess a height and spread in accordance with the plant schedule. Anything less than HTA National Plant Specification standards for each species and pot size will be rejected. Plant stock shall be bushy, healthy, disease free, not pot bound, leggy or spindly. There should be a minimum of 5 breaks per shrub. This specification is the minimum standard required and any stock falling below this standard, in the sole opinion of the inspecting landscape architect, will be rejected and shall be lifted and replaced at the contractor's expense.

3.3 All shrubs, herbaceous plants, whips and transplants shall be watered in on planting with 20 litres per square metre. Trees shall be watered in with 50 litres per tree position. Water thereafter during the contract period at weekly intervals with 30 litres of water per tree position.

3.4 Proposed feathered trees to be true to the species, variety and size as specified on the planting plan, to include 1.8m long, 100mm diameter, chestnut stake above ground dimension to be 1/3 the height of the tree, stakes to be driven vertically and 1No. sackcloth or rubber tie, with spacing device, all positioned 25mm maximum from the top of the post.

3.5 Proposed standard trees to be true to the species, variety and size as specified on the planting plan, to include 2No. 2.0m long, 100mm diameter, chestnut stakes, above ground dimension to be 1/3 the height of the tree, stakes to be driven vertically, supply and tie securely (twice screwed to each end) a half round cross brace (180mm diameter) with rubber spacer block fixed between tree stem and the cross brace and secured with 1No. sackcloth or rubber tie so the tree is securely restrained and there is no chance of the tie stem chafing with the cross brace.

3.6 Turf to be of cultivated grade such as Rolawn "Medallion", or other of similar quality and source, approved by the landscape architect. The contractor shall replace at once any turf rejected by the landscape architect at his own cost. Ensure that the turf is laid flat and is free from hollows, lumps and bumps, cracks or broken or dried patches or other defects and that turf is well watered before before laying and again after laying. Turf areas shall be topped off with high-rails tape until well established. Access shall be only with timber scaffold planks to prevent compaction.

3.7 Self clinging climbing shrubs or wall shrubs, with "S" written after the climber name, shall be trained to the wall/fence with heavy duty, plastic coated garden wire. Training wires shall be attached vertically to the wall/fence by means of 125mm long stainless steel eye screw fittings. Position 1No. at 250mm from ground, and 1No. 250mm from top of the wall/fence, and string the wire tightly between the fittings. Train the climber to the wire with plastic coated garden wire tags.

3.8 Twining varieties of climber, with "T" written after the climber's name (in specially prepared pits or general shrub beds) shall be trained to walls/ fences by mounting ready-made trellis panels 1.8 x 1.8m generally (but 1.8 x 0.6m for corners or where space is restricted). Include for adapting any panels for locations where walls or fences are lower than 1.8m. Fix trellis panels to the walls/ fences using non rusting screws 125mm long (to be approved), incorporating 50mm cube wood spacing blocks to ensure that the panel is mounted sufficiently far from the wall/ fence to allow twining of stems. Ensure that all timber is pressure impregnated with a non phyto-toxic preservative and then painted with a dark brown non phyto-toxic preservative wood stain such as Sadolin "Classic" Jacobean Walnut or similar and approved. Ensure that the trellis is not in contact with the ground. Train the climbing shrub to the trellis with plastic coated garden wire tags.

3.9 Climbers specified outside proposed shrub beds shall have specially prepared climber pits. Climber pits shall be 400mm x 400mm and 450mm deep (minimum size), and be backfilled with topsoil (from site - unless otherwise agreed). Ensure the base of the pit is thoroughly broken up and free draining before backfilling with topsoil. Ensure no damage to foundations and services, and make good all structures and surfaces disturbed. Fertilise with 50g of Horticase CRF (16-8-12) slow release fertilizer. Water with 20 litres of water per climber pit.

4.0 Mulch

4.1 Supply and spread suitable biodegradable sheet mulch over planting beds, previously, cultivated, graded and fertilized topsoil before planting, and peg down at a minimum of 500mm centres, (300mm at edges) and beds less than 1m wide. Pegging this densely is essential to prevent flaps of material becoming exposed. Refer to the specification for biodegradable sheet mulch on plan.

4.2 Following planting, supply and spread evenly Chunky Chip Longevity" available from Suffolk Woodchips Ltd to a depth of 50mm evenly spread over all planted areas. Finished mulch levels shall be no higher than 15mm below pavement or grass levels, 300-400mm of bed edges, to avoid any spillage onto pavements or lawns. N.B. no substitution of mulch type will be acceptable. It is essential to have a no-fines, large particled, brown wood chip to reduce weed growth, reduce wind blow and prevent break down and rotting.

5.0 BS codes

5.1 All workmanship and materials shall conform to the following codes:-
5.1.1 General landscape operations (excluding hard surfaces) - BS 4428:1989.
5.1.2 Trees in relation to construction- BS 5837: 2012 and BS 6548:1999, BS 3998:2010 (recommendations for tree works) unless otherwise specified, Arboricultural Association - Standard Conditions of Contract and Specifications of Tree Works 1996.
5.1.3 Nursery stock in accordance with latest horticultural trade association nursery stock specification entitled "National Plant Specification 2010".
Plants shall conform to:
-BS 8545 : 2014 Trees from Nursery to Independence in the Landscape
-BS 3936-1 : 1992 Nursery Stock - Specification for trees and shrubs.
-BS 3936-2 : 1990 Nursery Stock- Specification for roses + AMD 6628.
-BS 3936- 4 : 2007 Nursery stock- Specification for forest trees.
-BS 3936-9 : 1998 Nursery stock- Specification for bulbs, corms and tubers.
-BS 3936-10 : 1990 Nursery stock- Specification for ground cover shrubs.
-CPSE-Committee for Plant Establishment, Handling and establishing landscape plants 1996, Part 3, paragraphs 6.2 to 6.8.
5.1.4 Glossary for Landscape Works BS 4428 :1989
5.1.5 Turf - BS 3969:1998 + A1:2013 - recommendations for turf for general purposes.
5.1.6 Seeding - EEC Regulations 1974. Use blue labelled certified varieties to EC purity and germination regulations. When requested, submit an official seed Testing Station Certificate of germination, purity and composition.
5.1.7 Topsoil - BS 3882: 2015
5.1.8 Pesticides: Control of Pesticides Regulations 1997:The Health and Safety at Work Act 1974(2005): the COSHH Regulation 2020 and the product COSHH sheet. The Water Act 2014: the Floods and Water Amendment (EU Exit) Regulations 2019: Control of Pollution Act 1974: Hedgerow ACT 1997: Wildlife and Countryside Act 1981: Countryside and Rights of way Act 2000.

GENERAL NOTES FOR THE DEVELOPER.

6.0 Tree protection

6.1 Any existing trees to be retained, are the responsibility of the main contractor on site who shall take all necessary protective measures set out in BS 5837:2012 to ensure no damage to stems or roots, to prevent compaction from vehicles or storage of materials, contamination of soil from spillages, scorching from fires and instability or stress from changes of soil level. The landscape contractor is however responsible for ensuring that neither plant, materials or labour are cause of any damage to existing trees, and like the employer, the landscape contractor shall replace at once any tree damaged on site, supplying and planting a tree of the same species and size, at his own cost. Protection barriers will comprise a scaffold framework in accordance with Figure 2 of BS 5837:2012 (The BS).
The framework will consist of vertical and horizontal scaffolds with vertical tubes spaced at no more than 3m intervals and driven into the ground. Weld mesh (Heras or similar) panels will be securely fixed on to this framework with wire or scaffold clamps. Tubes will be driven into the ground to a minimum depth of 600mm.
Supporting struts will be fixed to the inside of the barrier to ensure maximum rigidity.

6.2 Ground work

6.2.1 Soil levels: soil levels for shrub beds and grass areas should have any compacted subgrade thoroughly broken up by machine before instructing the ground worker to spread topsoil or the landscape contractor to commence work or the beds will become waterlogged in wet weather and the plants and turf will die.

6.2.2 Top soil depth: Topsoil spread from the site should be to the following minimum depths- Shrub beds: 450mm. Grass areas 150mm, allow for excavation of 415mm of the subgrade for shrub beds to leave beds 65mm below finished pavement or grass areas in order to receive sheet and bark mulch. Tree pits will be dug by the landscape contractor. Top soil for turf areas shall be spread to a level 10mm below paving in order to receive the turf. Topsoil for grass seed areas, the soil level shall be flush with any finished paved surfaces after settlement to allow for rain water to drain onto soft surfaces. Settlement shall be no greater than 5mm or problems will be encountered with mowing (the blades in danger of touching concrete edgings) or where soil is proud of pavements, then drainage problems will be encountered.

6.3 Existing topsoil and imported soil shall conform to BS 3882:2015, and be free from compaction, rocks/bricks greater than 50mm diameter, concrete, wire, roots, debris, oil, cement and builders rubble. Soil shall have a clay content of less than 20%.

7.0 Hardworks

7.1 Hard works, unless otherwise agreed, shall be carried out by the developer or main contractor, and all materials and workmanship shall be in accordance with the construction details and the layout plan.

7.2 All paths and edgings shall be set out properly to lines and radii, with all curves scribed on the ground using pointed pegs and string or site marker paint, achieving flowing natural arcs. Setting out shall be agreed with the landscape contractor and subsequently the landscape architect.

7.3 Hard surfaces shall be constructed after suitable base courses have been laid, taking full account of local site conditions, soft spots and substrate. The indicative depths of base courses are minimum depths assuming suitable substrate conditions.

7.4 All metalwork shall be finished hot dipped galvanized in accordance with BS EN ISO1460. The galvanizer shall be responsible for the thorough removal of all galvanizing smuts (fettling) to the complete satisfaction of the Landscape Architect. The decorating contractor shall prepare the galvanized surface by washing with detergent and water and scrubbing with a scouring pad until all dirt, grease, white rust & sulphates have been removed & then allowed to dry thoroughly. Supply and paint Icosit 6630' from Sika Ltd (tel. 01707 374444) applied with a turkhead brush strictly in accordance with the manufacturers instructions, COSHH regulations and the product COSHH sheet. Apply 2No. coats of paint with a dry film thickness of 100 microns per coat. Apply paint only when galvanized surface is thoroughly dry at temperatures above five degrees celsius and in any event above the current dew point temperature. Paint work will be subject to inspection by experts and if found wanting, shall be stripped off, re-prepared and applied entirely at the decorating contractors own cost.

7.5 All wood work shall be pressure treated with Tanalith "E" water based wood preservative, applied by vacuum pressure. The timber shall then be stained with 3No. coats of Sadolin 'Classic' colour 'Jacobean Walnut' strictly in accordance with the manufacturers instructions, COSHH Regulations 2020 and product COSHH sheet.

LANDSCAPE PROGRAMMING

DUE TO NATIONAL PLANT SHORTAGE: PLANTS MAY TAKE UP TO 4 WEEKS TO BE DELIVERED, EARLY LEAD-IN FOR SOFT LANDSCAPE IS ESSENTIAL.

GENERAL NOTES

- ALL DIMENSIONS IN MILLIMETRES
- DO NOT SCALE OFF THIS DRAWING
- ALL DIMENSIONS TO BE CHECKED ON SITE

(C)JAMES BLAKE ASSOCIATES LTD 2023

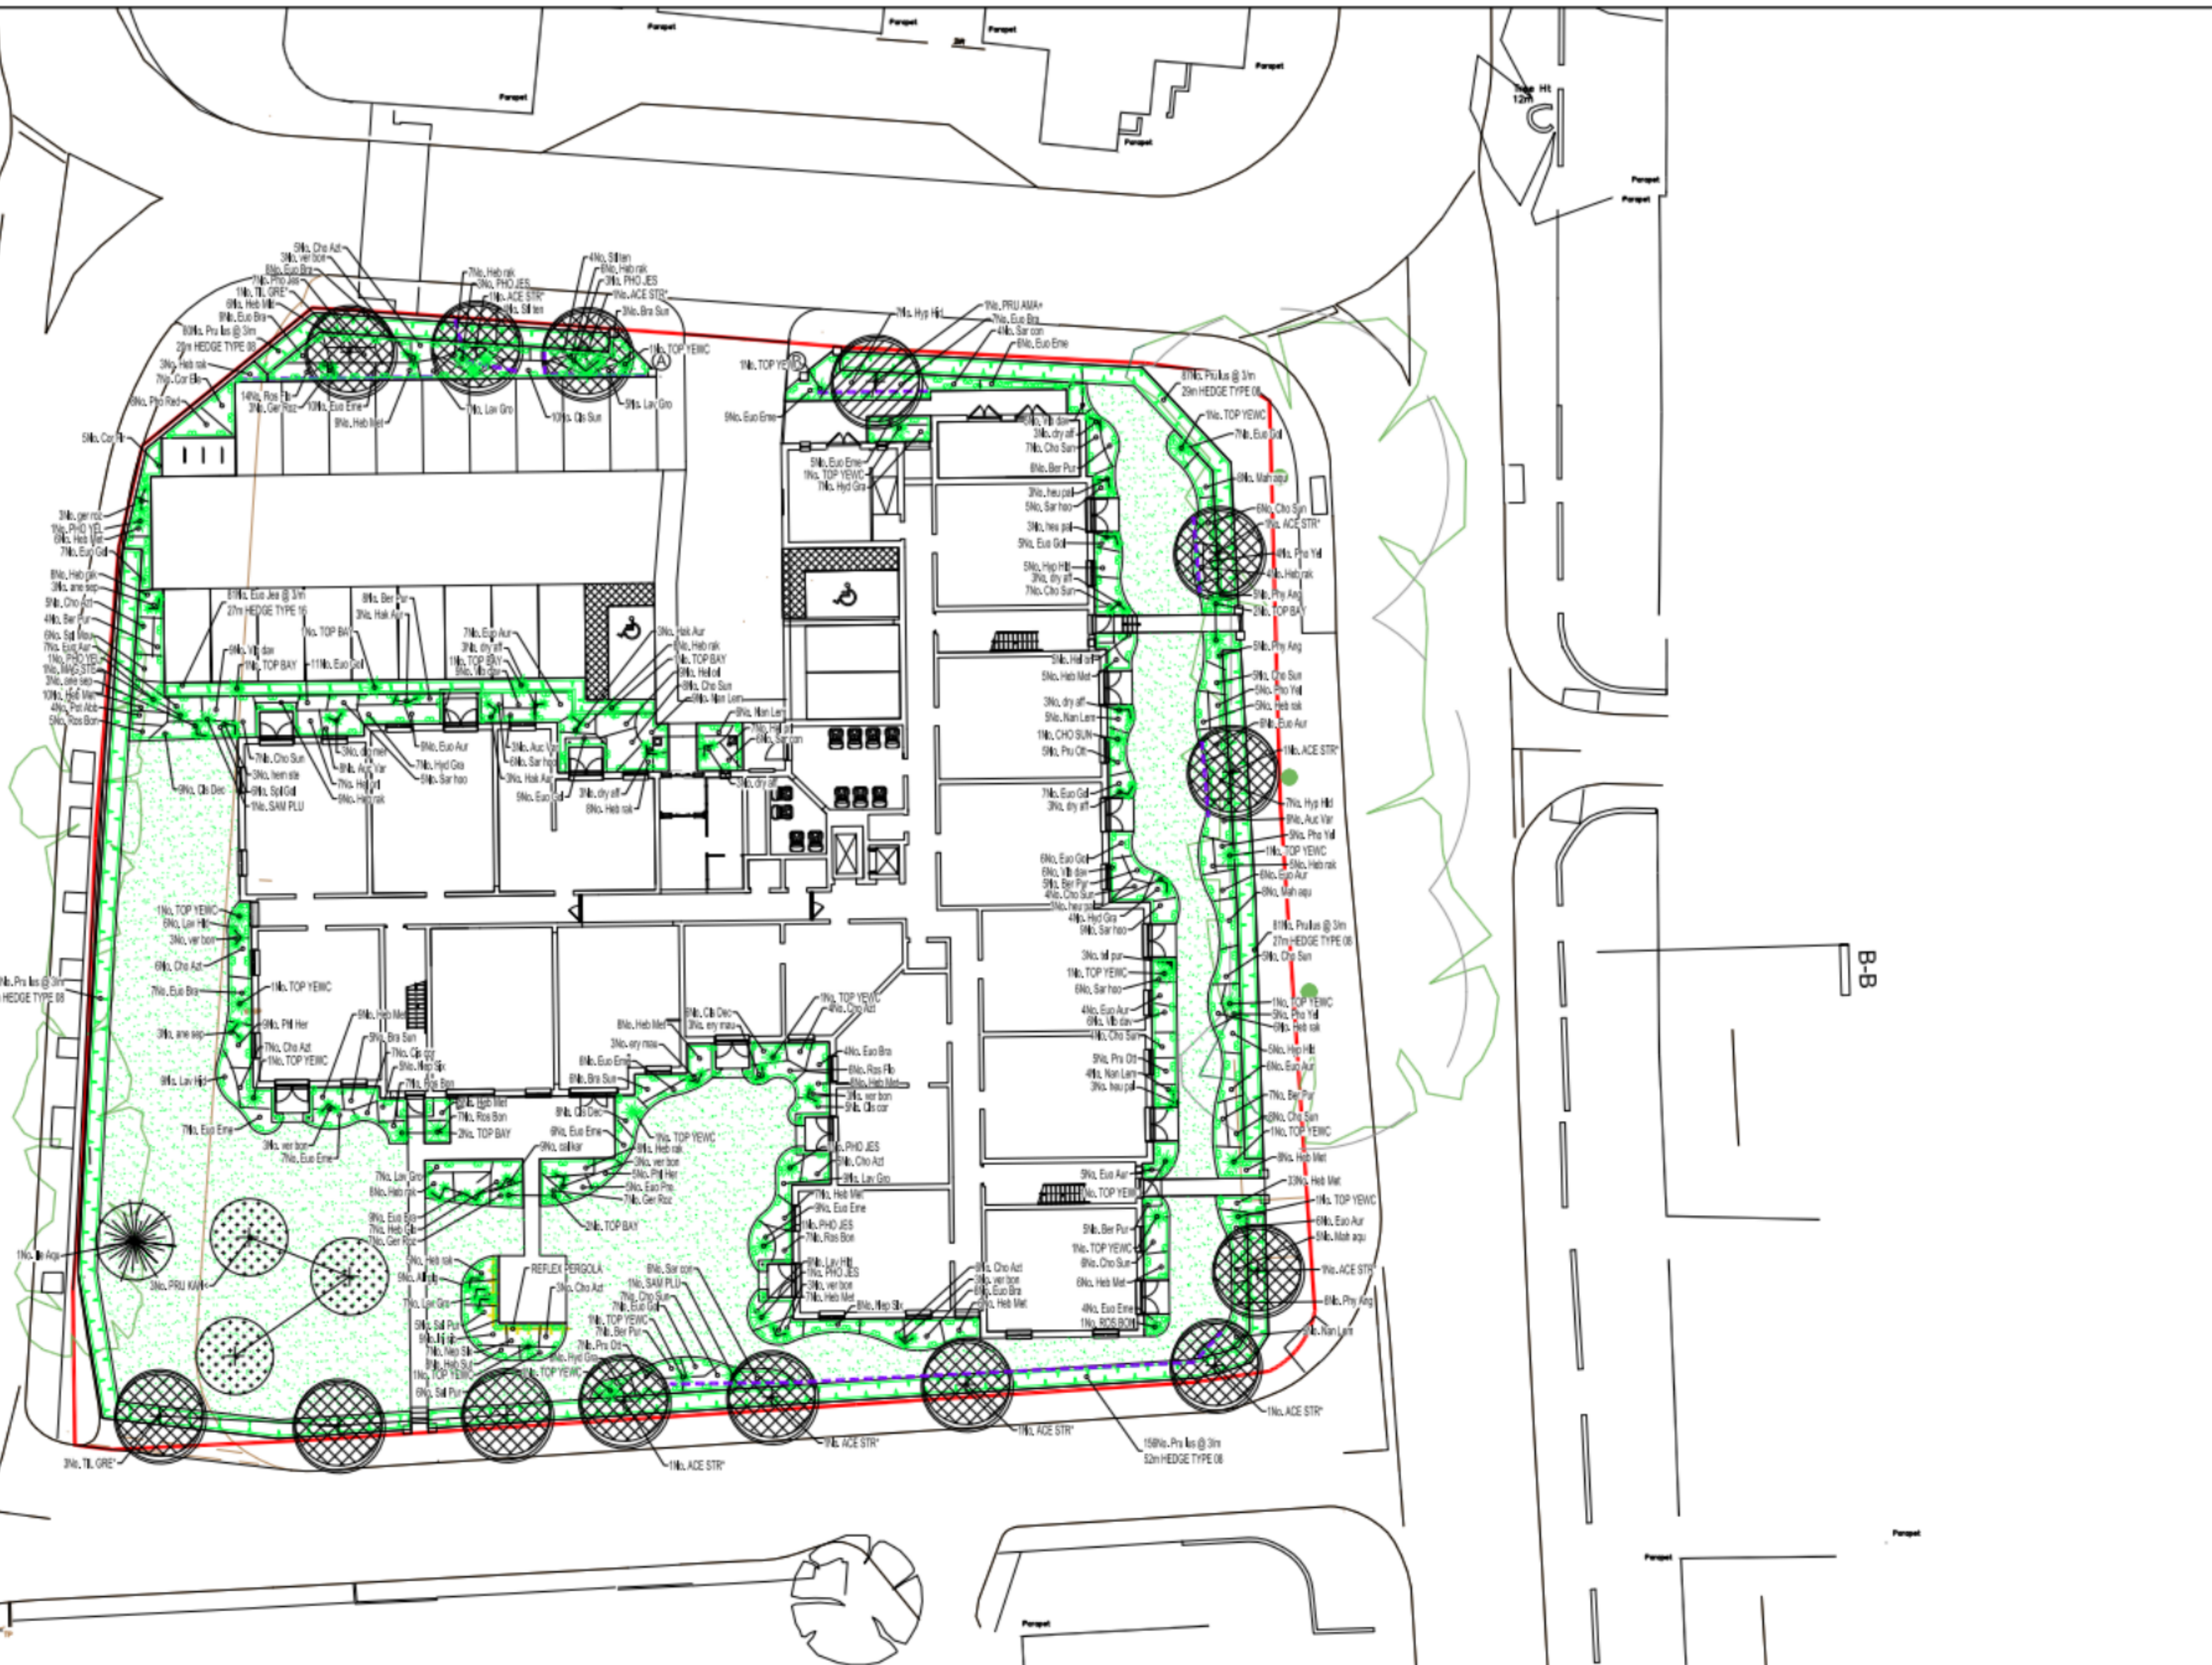

KEY

- RED LINE BOUNDARY
- PROPOSED HEAVY STANDARD TREE, INCLUDING DOUBLE STAKE AND TIE. SEE SPECIFICATION NOTES 1.1, 2.2, 2.3, 2.5, 3.1-3.4, 4.1-4.2 AND 5.1.
- PROPOSED EXTRA HEAVY STANDARD TREE, INCLUDING DOUBLE STAKE AND TIE. SEE SPECIFICATION NOTES 1.1, 2.2, 2.3, 2.5, 3.1-3.4, 4.1-4.2 AND 5.1.
- PROPOSED CONIFEROUS OR BROAD LEAF EVERGREEN TREE, INCLUDING STAKE AND TIE. SEE SPECIFICATION NOTES 1.1, 2.2, 2.3, 2.5, 3.1-3.4, 4.1-4.2 AND 5.1.
- PROPOSED MULTISTEM TREE, INCLUDING UNDERGROUND GUYING. SEE SPECIFICATION NOTES 1.1, 2.2, 2.3, 2.5, 3.1-3.4, 4.1-4.2 AND 5.1.
- SHRUB AND HERBACEOUS PLANTING, INCLUDING BIODEGRADABLE SHEET AND BARK MULCH (ACCORDING TO SPECIFICATION), SEE SPECIFICATION NOTES 1.1-1.2, 2.1-2.3, 3.1-3.3, 4.1-4.2 AND 5.1.
- NATIVE WHIP AND SHRUB PLANTING IN MIXES, INCLUDING BIODEGRADABLE SHEET AND BARK MULCH (ACCORDING TO SPECIFICATION. SEE SPECIFICATION NOTES 1.1-1.2, 2.1-2.3, 3.1-3.3, 4.1-4.2 AND 5.1.
- HEDGE PLANTING, INCLUDING BIODEGRADABLE SHEET AND PINE NUGGET MULCH (ACCORDING TO SPECIFICATION), REFER TO HEDGE SCHEDULES ON PLAN AND THE SCHEDULE OF QUANTITIES. SEE SPECIFICATION NOTES 1.1-1.2, 2.1-2.3, 3.1-3.3, 4.1-4.2 AND 5.1.
- CULTIVATED TURF UNLESS OTHERWISE STATED ON PLAN. SEE SPECIFICATION NOTES B4, C5 AND E1.
- WILDFLOWER TURF AREA. REFER TO PLANT SCHEDULE FOR SPECIFICATION OF MIX.
- WOODLAND PLANTING MIX, SPRING FLOWERING VARIETIES, REFER TO SCHEDULE FOR FURTHER INFORMATION.
- CLIMBING SHRUB IN SHRUB BEDS, GRASS/ GRAVEL OR IN PITS IN PAVING. (SEE PLAN). TWINING VARIETIES (MARKED'T') SEE NOTE C7. SELF CLIMBING VARIETIES (MARKED'S') SEE NOTE C6. SEE SPECIFICATION NOTES C1-3, C8, D1-2 AND E1.
- SPECIMEN SHRUBS IN SHRUB BEDS OR PIT PLANTED IN GRASS/GRAVEL AREAS. SPECIMEN SHRUBS IN GRASS . SEE SPECIFICATION NOTES A1, B1-3, C1-3, D1-2 AND E1.
- SEASONAL HIGHLIGHT HERBACEOUS PLANTS WITHIN SHRUB BED. SEE SPECIFICATION NOTES A1, B1-3, C1-3, D1-2 AND E1.
- EXISTING TREE/VEGETATION TO BE RETAINED, SEE GENERAL NOTE A1 AND E1. IF PREPARED, SEE ALSO ARB PLAN AND SCHEDULE BY OTHERS FOR ANY SURGERY WORKS.
- INDICATIVE LOCATION OF PROPOSED ROOT BARRIER. PROVIDE ReROOT 2000 1m DEPTH IN LOCATION SHOWN TO PROTECT UNDERGROUND SERVICES. LOCATION TO BE AGREED WITH ENGINEER AND LANDSCAPE ARCHITECT.
- INDICATIVE LOCATION OF PROPOSED REFLEX PERGOLA. TO BE CONFIRMED WITH CLIENT FOR SPECIFICATION

SPECIFICATION FOR HEDGE PLANTING

SPECIFICATION FOR NATIVE AND SEMI-NATIVE HEDGES e.g. Mixed native species, Carpinus betulus & Fagus sylvatica.
Hedges containing native and semi-native planting in mixes shall be planted in two straight rows set 335mm apart at a density of 6 plants per linear metre. The two rows shall be placed in the centre of the bed and shall be offset so that the plants are alternate and not opposite each other. Plants to be open ground stock 600-800mm high.

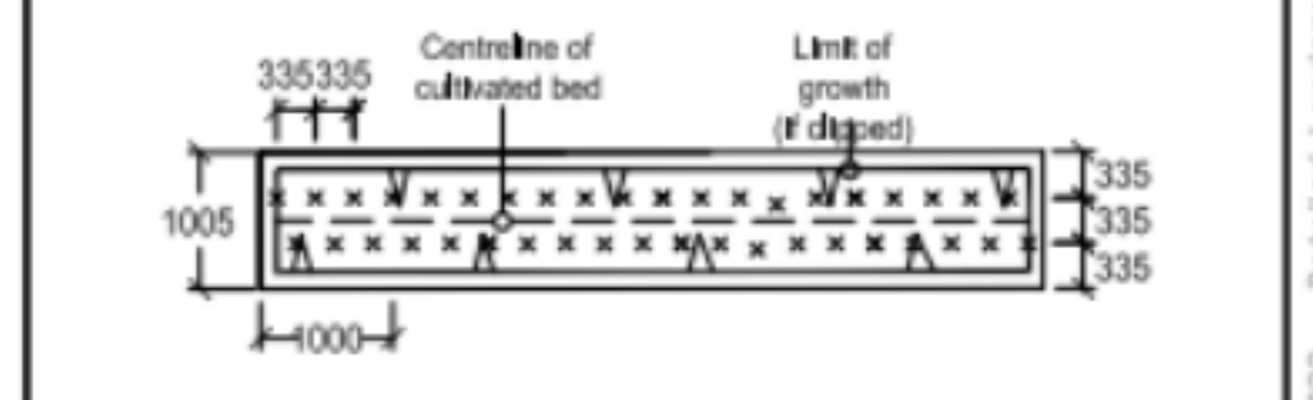

SPECIFICATION FOR ORNAMENTAL HEDGE PLANTING - LARGE GROWING SPECIES e.g. Osmanthus heterophyllus, Ligustrum ovalifolium, Viburnum tinus, Cotoneaster lacteus, Euonymus japonicus 'Aureopictus', Escallonia 'Apple Blossom' & Griselinia littoralis.

Hedges containing large ornamental species shall be planted in a single straight row at a density of 3 plants per linear metre. The row shall be placed in the centre of the bed. Hedge plants to be 3L container grown stock, 400-600mm height and spread unless otherwise stated.

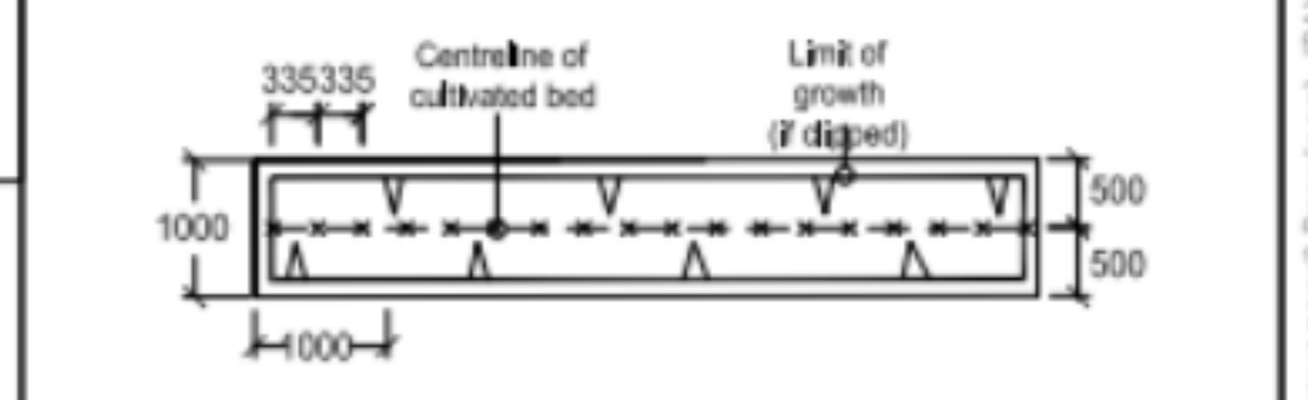

SPECIFICATION FOR ORNAMENTAL HEDGE PLANTING - SMALL GROWING SPECIES e.g. Euonymous, Osmanthus delavayi, Lavendula spica 'Hidcote,' Hebe toplara & Lonicera nitida.

Hedges containing small ornamental species shall be planted in a single straight row at a density of 3 plants per linear metre. The row shall be placed in the centre of the bed. Hedge plants to be 3L container grown stock, 300-400mm height and spread unless otherwise stated.

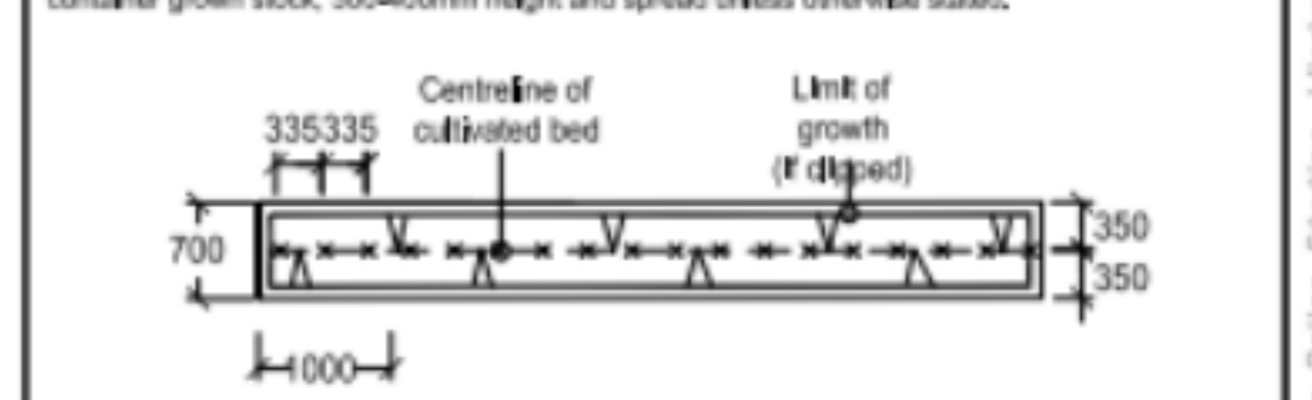

NB. Hedges adjacent to gravel areas shall have the cultivated strip separated from gravel by a timber edge 75 x 25mm of ACQ treated timber stained with 3No. coats of Sadolin 'Classic' colour 'Walnut' (dark brown wood stain) according to specification.

INSET DETAIL 1: SHRUB BED WITH Chunky Chip Longevity" available from Suffolk Woodchips Ltd BIODEGRADABLE "ECOTEX" - ECOTEX IS A BIODEGRADABLE SHEET MULCH - THIS IS AN IMPORTANT DESIGN CRITERION).

NOT TO SCALE

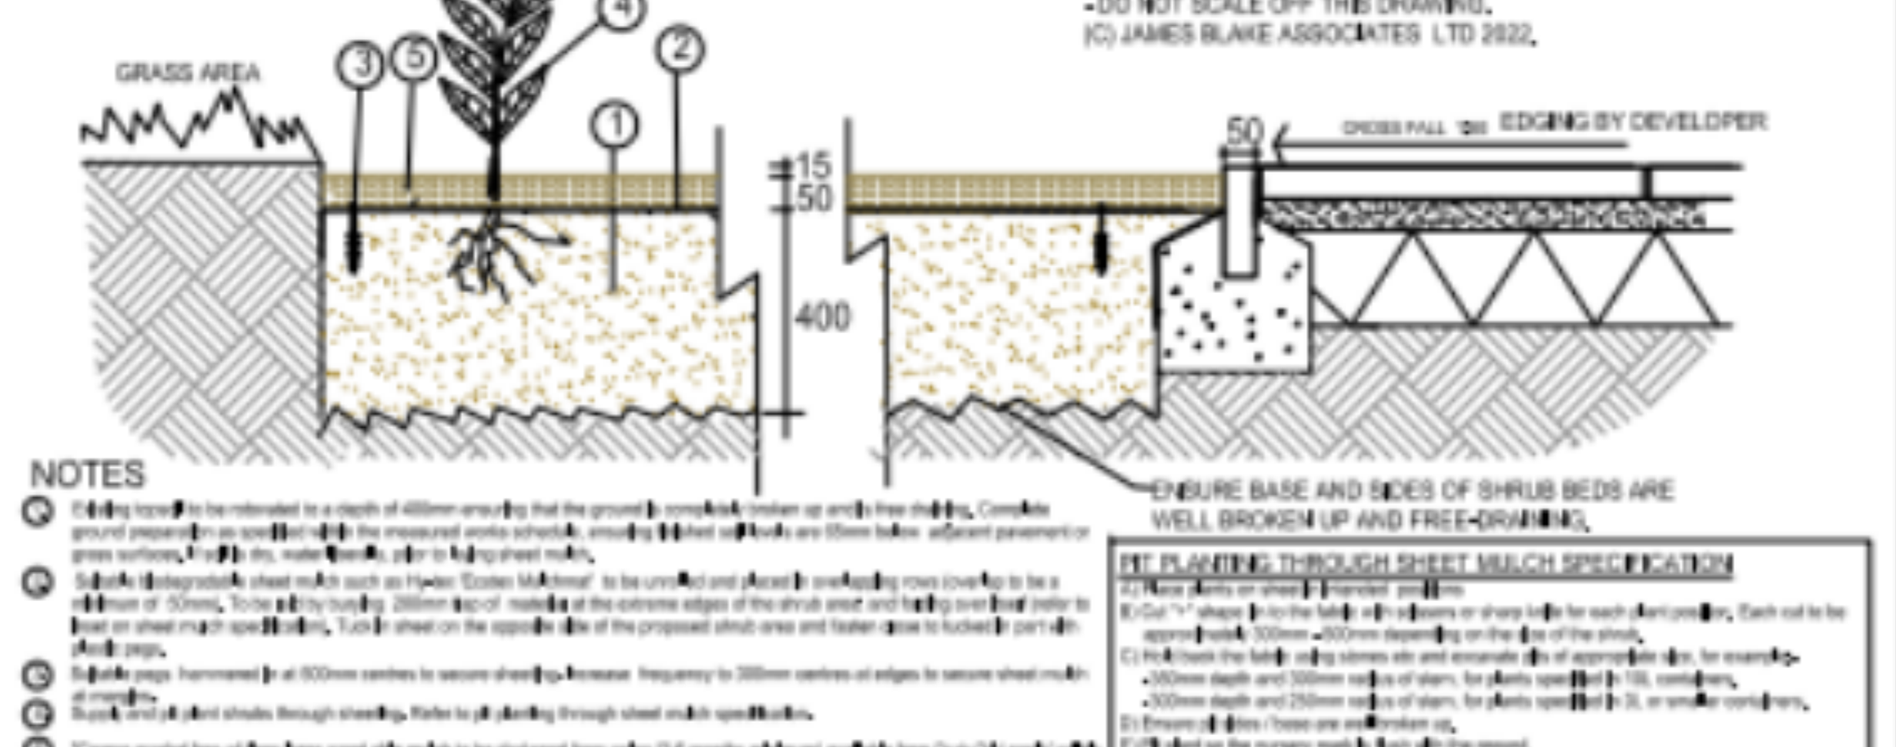

GENERAL NOTES:
- ALL DIMENSIONS IN MILLIMETRES.
- DO NOT SCALE OFF THIS DRAWING.
(C) JAMES BLAKE ASSOCIATES LTD 2022.

NOTES

PIT PLANTING THROUGH SHEET MULCH SPECIFICATION

CDM RISK ASSESSMENT

Within this CDM risk assessment any risk has been reviewed during the design stages and in house checking procedure. The purpose of this notification is to identify any significant hazards related to design work by James Blake Associates only, which constitutes to a significant hazard being defined as a unforeseeable hazard which is not likely to be obvious to a competent contractor or other designer or unusual or difficult to manage effectively. This is in accordance with Regulation 13 (Requirements of the Designer) of the CDM Regulations 1994 (amended 2015).

It is assumed that other designers or contractors have been notified by the client , principle designer or principle contractor of an pre existing hazards or difficulties of management situations present. A certain level of Health and Safety management is assumed (reference to Management of Health and Safety at Work Regs 1999; Provision and Use of Work Equipment Regs 1998; Personal Protective Equipment at Works Regs 2002; Manual Handling Operations Regs 1992 etc).

ITEM	RISK LEVEL	HAZARD/RISK
EXCAVATION, CONSTRUCTION, COMPACTION AND SOIL PREPARATION NEAR EXISTING TREES BOTH ON AND OFF THE SITE	MEDIUM	HAZARD TO SAFETY OF WORKERS, USERS OF ADJACENT LAND AND FUTURE USERS OF THE SITE BY DAMAGED TREES
EXCAVATION OF TREE PITS NEAR OR ADJACENT TO UNDERGROUND SERVICES	HIGH	DAMAGE TO SERVICES AND HAZARD TO SAFETY OF WORKERS

*A list of James Blake Associates Approved Landscape Contractors is available on request.

DT1- TYPICAL TREE PIT DOUBLE STAKE

SCALE 1:50

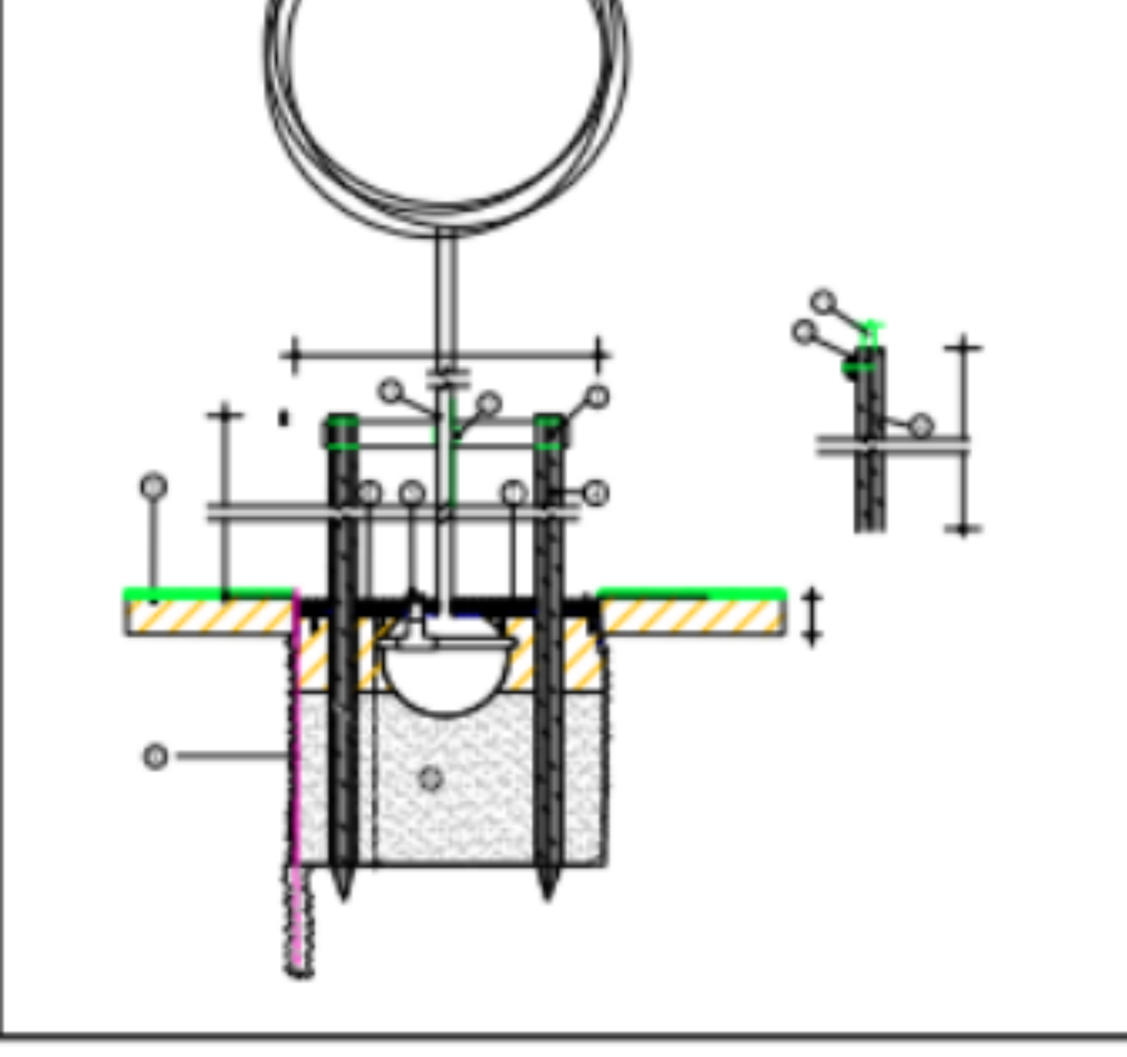

NOTES

1. STANDARD TREE WITH LEADER, FOR SPECIES AND SPECIFICATION REFER TO SOFTWORKS PLAN.
2. CLOTH TIE AND SPACING DEVICE NAILED TO CROSS BRACE WITH GALVANISED NAILS.
3. CROSS BRACE APPRX 650mm LONG, 100mm DIAMETER, HALF-ROUND, SECURED TO BOTH STAKES.
4. TANALITH E TREATED, PEELED LARCH TIMBER STAKES, 2No. 2400 x 100mm DIAMETER, TO BE SECURELY DRIVEN INTO FIRM SUBGRADE, WITH HALF ROUND CROSS BRACE SECURELY NAILED TO THE STAKES. ENSURE IT IS SUFFICIENTLY AWAY FROM ROOTBALL TO PREVENT ROOT DAMAGE.
5. PERFORATED PVC WATERING PIPE (80mm DIAMETER) INCLUDING END CAP. TO BE WRAPPED IN "HY-TEX" AGROTEXTILE WOVEN PLASTIC FABRIC AVAILABLE FROM HY-TEX LTD. TEL (01233) 720097 OR EQUAL AND APPROVED. TO BE COILED AROUND TOP OF ROOTBALL, WITH OPEN END AS CLOSE AS POSSIBLE TO TRUNK.
6. BIODEGRADABLE MULCH MAT TO BE APPLIED AROUND BASE OF THE TREE, 500mm x 500mm SQUARE CUT AROUND TREE STEM AND WATER PIPE, TO BE PEGGED IN AT 300mm CENTRES WITH TIMBER PEGS OR SIMILAR AND APPROVED.
7. CHUNK-CHIP LONGEVITY MULCH AVAILABLE FROM SUFFOLK WOOD CHIPS", TO A DEPTH OF 50mm, RECESSED 15mm BELOW GRASS LEVEL.
8. SIDES AND BOTTOM OF TREE PIT TO BE BROKEN UP AND BACKFILLED WITH A MEDIUM AS CLOSE AS POSSIBLE TO MEDIUM EXCAVATED FROM THE TREE THE PIT REPLICATING, AS CLOSE AS IS PRACTICABLE. THE ORIGINAL SOIL PROFILES (MAX 300mm DEPTH OF TOPSOIL TO BS 3882:2015), INCORPORATE FERTILIZER SUCH AS HORTIBASE CFR 16-8-12 SLOW RELEASE, FROM HORTIFEEDS TEL. (01530) 510080, INTO TOPSOIL AT SUITABLE RATES. SUBSOIL BACKFILL TO BE LOOSENED AND TREATED WITH SUITABLE SOIL AMELIORANT IF HEAVY CLAY EXISTS. TOPSOIL BENEATH GRASS TO BE 150mm IF SEEDED AND 300mm IF TURFED.
9. WHERE REQUIRED - INSTALL ROOT PROTECTION BARRIER TYPE REROOT 2000: THICKNESS 2mm, DEPTH 2000mm WHERE POSSIBLE (OR 1000mm WHERE NOT). AVAILABLE FROM GREENBLUE URBAN, HAYWOOD WAY, HASTINGS, EAST SUSSEX, TEL: 01424 717797 OR SIMILAR AND APPROVED . ROOT BARRIER TYPE: REROOT 2000 POSITIONED WHERE SHOWN IN TREE PIT DETAIL REMOVE SHARP OBJECTS FROM THE TRENCH WALLS AND THE BACKFILL MATERIAL. IF REQUIRED OVERLAP BY 500mm TO JOIN REROOT 2000 AND SECURE WITH ROOT BARRIER JOINTING TAPE. ENSURE THE TOP OF THE BARRIER FINISHES AT LEAST 10MM ABOVE FINISHED SOIL LEVELS.

SCHEDULE OF PLANTS

SHRUBS

QTY	CODE	PLANT NAME	STOCK	SPACING	SHC	DFB	MIN HEIGHT/SPREAD
20No.	Auc Var	Aucuba japonica "Variegata"	C.G. 10L	3/m2	C		600-800 x 600-800mm
42No.	Ber Pur	Berberis cortifolia "Purpurea"	C.G. 5L	4/m2	-		100-200 x 100-200mm
14No.	Bra Sun	Brachyglottis dunedin "Sunshine"	C.G. 5L	3/m2	B		200-300 x 200-300mm
41No.	Cho Azt	Choisya ternata "Aztec Pearl"	C.G. 10L	3/m2	C		400-600 x 400-600mm
74No.	Cho Sun	Choisya ternata "Sundance"	C.G. 10L	3/m2	C		400-600 x 400-600mm
12No.	Cis cor	Cistus x corbariensis	C.G. 5L	3/m2	B		300-400 x 300-400mm
10No.	Cis Sun	Cistus pulverulentus "Sunset"	C.G. 5L	3/m2	B		300-400 x 300-400mm
23No.	Cis Dec	Cistus x dansereaui "Decumbens"	C.G. 5L	4/m2	B		300-400 x 300-400mm
5No.	Cor Fir	Cornus sanguinea "Midwinter Fire"	C.G. 5L	3/m2	C		400-600 x 400-600mm
7No.	Cor Ele	Cornus alba "Elegantissima"	C.G. 5L	3/m2	D	2.25	400-600 x 400-600mm
50No.	Euo Aur	Euonymus japonicus "Ovatus Aureus"	C.G. 10L	3/m2	C		600-800 x 600-800mm
69No.	Euo Eme	Euonymus fortunei "Emerald Gaiety"	C.G. 5L	5/m2	A		300-400 x 300-400mm
50No.	Euo Gol	Euonymus fortunei "Emerald 'n' Gold"	C.G. 5L	5/m2	A		300-400 x 300-400mm
52No.	Euo Bra	Euonymus japonicus "Bravo"	C.G. 10L	3/m2	B		600-800 x 600-800mm
5No.	Euo Pre	Euonymus "President Gautier"	C.G. 5L	3/m2	B		400-600 x 400-600mm
16No.	Ger Roz	Geranium "Rozanne"	C.G. 3L	5/m2	-		100-200 x 100-200mm
7No.	Heb Gib	Hebe "Green Globe"	C.G. 5L	3/m2	B		300-400 x 300-400mm
6No.	Heb Mid	Hebe "Midsummer Beauty"	C.G. 10L	3/m2	D	1.5	400-600 x 400-600mm
127No.	Heb Met	Hebe "Metta"	C.G. 5L	4/m2	B		300-400 x 300-400mm
90No.	Heb rak	Hebe rakaiensis	C.G. 5L	4/m2	A		300-400 x 300-400mm
8No.	Heb Sut	Hebe "Sutherlandii"	C.G. 5L	4/m2	A		300-400 x 300-400mm
28No.	Hel ori	Helleborus orientalis	C.G. 3L	5/m2	-		100-200 x 100-200mm
26No.	Hyd Gra	Hydrangea paniculata "Grandiflora"	C.G. 10L	3/m2	E		400-600 x 400-600mm
24No.	Hyp Hid	Hypericum "Hidcote"	C.G. 10L	3/m2	C		600-800 x 600-800mm
9No.	Iris	Iris iris	C.G. 2L	6/m2	-		100-200 x 100-200mm
34No.	Lav Hid	Lavandula angustifolia "Hidcote"	C.G. 5L	4/m2	A		300-400 x 300-400mm
35No.	Lav Gro	Lavandula "Grosso"	C.G. 5L	4/m2	A		300-400 x 300-400mm
21No.	Mah aqu	Mahonia aquifolium	C.G. 10L	3/m2	E	3.75	600-800 x 600-800mm
20No.	Nan Lem	Nandina domestica "Lemon"	C.G. 5L	3/m2	B		300-400 x 300-400mm
20No.	Nep Six	Nepeta "Six Hills Giant"	C.G. 3L	6/m2	B		300-400 x 300-400mm
14No.	Phil Her	Philadelphus "Manteau d'Hermine"	C.G. 5L	3/m2	B		400-600 x 400-600mm
7No.	Pho Jes	Phormium "Jester"	C.G. 10L	3/m2	-		800-1000 x 800-1000mm
19No.	Pho Yel	Phormium "Yellow Wave"	C.G. 10L	3/m2	-		800-1000 x 800-1000mm
8No.	Pho Red	Photinia x fraseri "Red Robin"	C.G. 10L	3/m2	E	3.75	800-1000 x 800-1000mm
16No.	Phy Ang	Physocarpus opulifolius "Angels Gold"	C.G. 10L	3/m2	C		600-800 x 400-600mm
4No.	Pot Abb	Potentilla fruticosa "Abbotswood"	C.G. 5L	3/m2	B		400-600 x 400-600mm
17No.	Pru Ott	Prunus laurocerasus "Otto Luyken"	C.G. 10L	3/m2	B		600-800 x 600-800mm
20No.	Ros Flo	Rosa "Flower Carpet"	C.G. 3L	3/m2	B		300-400 x 300-400mm
28No.	Ros Bon	Rosa "Bonica"	C.G. 3L	3/m2	B		300-400 x 300-400mm
11No.	Sal Pur	Salvia officinalis "Purpurascens"	C.G. 3L	4/m2	-		200-300 x 200-300mm
16No.	Sar con	Sarcococca confusa	C.G. 3L	4/m2	D	1.5	200-300 x 200-300mm
31No.	Sar hoo	Sarcococca hookeriana var digyna	C.G. 3L	4/m2	B		200-300 x 200-300mm
6No.	Spi Gol	Spiraea japonica "Goldflame"	C.G. 5L	3/m2	B		300-400 x 300-400mm
6No.	Spi Mou	Spiraea "Goldmound"	C.G. 5L	3/m2	C		300-400 x 300-400mm
17No.	Vib dav	Viburnum davidii	C.G. 5L	3/m2	B		300-400 x 300-400mm

GRASSES AND SEDGES

QTY	CODE	PLANT NAME	STOCK	SPACING
9No.	Hak Aur	Hakonechloa macra "Aureola"	C.G. 3L	5/m2
8No.	Sti ten	Stipa tenuissima	C.G. 3L	5/m2

SPECIMENS PLANTED IN BEDS, GRASS OR GRAVEL

QTY	CODE	PLANT NAME	STOCK	SHC	DFB
1No.	CHO SUN	Choisya ternata "Sundance"	C.G. 15L	C	
1No.	MAG STE	Magnolia stellata	C.G. 45L	E	2.25
9No.	PHO JES	Phormium tenax "Jester"	C.G. 15L	-	
2No.	PHO YEL	Phormium "Yellow Wave"	C.G. 15L	-	
2No.	SAM PLU	Sambucus racemosa "Plumosa Aurea"	C.G. 20L	E	2.25
6No.	ery mau	Eryngium Bowles Mauve	C.G. 2L	-	
21No.	ver bon	Verbena bonariensis	C.G. 2L	-	
21No.	dry aff	Dryopteris affinis	C.G. 2L	-	
12No.	heu pal	Heuchera 'Palace Purple'	C.G. 2L	-	
3No.	tel pur	Tellima grandiflora 'Purpurteppich'	C.G. 2L	-	
3No.	hem ste	Hemerocallis 'Stella de'Oro'	C.G. 2L	-	
9No.	ane sep	Anemone 'September Charm'	C.G. 2L	-	
3No.	ger roz	Geranium 'Rozanne'	C.G. 2L	-	
9No.	cal kar	Calamagrostis x acutiflora 'Karl Foers	star' C.G. 2L	-	
3No.	dig mer	Digitalis x mertonensis	C.G. 2L	-	

BULB PLANTING

QTY	CODE	PLANT NAME	STOCK	SPACING
9No.	All gig	Allium giganteum	bulb	20/m2

TOPIARY SPECIMEN SHRUBS/TREES PLANTED IN BEDS, GRASS OR GRAVEL

QTY	CODE	PLANT NAME	STOCK	SHC	DFB
19No.	TOP YEWC	Topiary Yew (Taxus baccata) cone 1.5m	C.G.	F	4.5
10No.	TOP BAY	Topiary Bay (Laurus nobilis) std ball, min 1.2m tall clear stem	C.G.	F	8

HEAVY STANDARD TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX HI	WD
1No.	PYR CHA+	Pyrus calleryana "Chanticleer"	R.B.	HVYSTD 12-14cm	6m	8m	M

EXTRA HEAVY STANDARD AND SEMI MATURE TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX HI	WD
9No.	ACE STR*	Acer campestre "Streetwise"	R.B.	XHVYSTD 14-16cm	8m	8m	M
4No.	TIL GRE*	Tilia cordata "Greenspire"	R.B.	XHVYSTD 20-25cm	15m	15m	M

CONIFEROUS TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX HI	WD
1No.	Ile Aqu	Ilex aquifolium	C.G. 45L BLE	250-300cm	6m	12m	L

CONIFEROUS TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX HI	WD
1No.	PRU AUT<	Prunus serrula "Kanzan"	R.B.	MUL 200-250cm	7m	14m	L

ORNAMENTAL HEDGE PLANTING

QTY	CODE	PLANT NAME	STOCK	SPACING	SHC	DFB
190m		Hedge type 02 Single row				
570No.	Pru las	Prunus lusitanica - min 1m high - clipped level after planting	C.G. 15L	3/m	F	6
27m		Hedge type 16 Single row				
81No.	Euo Jes	Euonymus japonicus "Jean Hugues" - min 500mm high - clipped after planting	C.G.	3/m	B	

SEED MIXES

AREA	SEED MIX NAME	
757m2	Area to be turfed	("Medallion" by Rowlawn Ltd, refer to Measured Works Schedule)

NOTES AND ABBREVIATIONS:

R.B. = Root-balled stock
C.G. = Container grown stock
O.G. = Open ground stock, to be planted Nov 1st - March 1st
FTH = Feathered tree
STD = Standard tree
HVYSTD = Heavy Standard tree
XHVYSTD = Extra Heavy standard tree
BLE = Broad Leaf Evergreen
CON = Conifer
L = Litre container
DFB = "Distance from Buildings" based on minimum building foundation depths
Max Ht = "Maximum Height" of tree
WD = "Water Demand" of tree
SHC = Shrub Height Classification
A = < 600mm mature height
B = 600mm - 1.8m mature height
C => 1.8m mature height with low water demand and slow growth
D = 1.8m - 3m mature height
E = 3m - 5m mature height
F = >5m mature height
Note: Plants not classified within the JBA SHC are NOT designated as shrubs. JBA understand shrubs to be defined as those plants of perennial habit with woody stems.

- Girth size is given for standard trees, otherwise all sizes refer to height. All sizes are the minimums acceptable.
- Shrubs specified as 3 litre size shall be 400-600mm minimum height and spread and 2 litre stock shall be 300-400mm minimum height and spread. These heights and spreads in relation to pot size are just a guide and the "National Plant Specification" sizes will be accepted (but will be seen as the absolute minimum acceptable). Any shrub supplied which are smaller than this will be rejected at once.
- Cornus varieties shall be twice transplanted and pruned to form bushy rounded plants. Leggy plants with few branches will be rejected, as will leggy plants which have been pruned hard.
- Plants shall be completely hardened off, any plants which show signs of scorching after planting will be rejected.

REFER TO THE ACCOMPANYING MEASURED WORKS SCHEDULE DOCUMENT FOR MORE INFORMATION
CHANGES TO SUPPLIERS/MANUFACTURERS ARE TO BE EQUAL AND APPROVED.
SUBSTITUTIONS TO SHRUB/TREE VARIETIES ARE TO BE AGREED WITH LANDSCAPE ARCHITECT.
DO NOT SCALE FROM THIS DRAWING
ALL DIMENSIONS TO BE CHECKED ON SITE

(C) JAMES BLAKE ASSOCIATES 2023

REV.	DATE	INITIALS	DETAILS
B	05/12/24	JB	AMENDED TO NEW LAYOUT RECEIVED 27.11.23
A	10/24/23	AJW	PLANTING ARRANGEMENT NEAR SUBSTATION TO SUIT POWER DB COMMENTS

CLIENT	DWG. TITLE
CHURCHILL LIVING - HOUSING 21	DETAILED LANDSCAPE PROPOSALS

SITE: WINDMILL STREET, GRAVESEND

PURPOSE OF ISSUE: PLANNING

DRG BY	CHECKED	AUTH'D	SCALE	DATE	DWG NO.	REV.
AJW	JBA	JBA	1:250@A1	OCTOBER 23	JBA 20/022 - 01	B

JAMES BLAKE

Head Office:
34-52 Out Westgate, Bury St Edmunds, Suffolk, IP33 3PA Tel: (01284) 335797
jamesblake@jba-landmarc.com www.jba-landmarc.com
LANDSCAPE ARCHITECTURE o ARBORICULTURE o ECOLOGY