


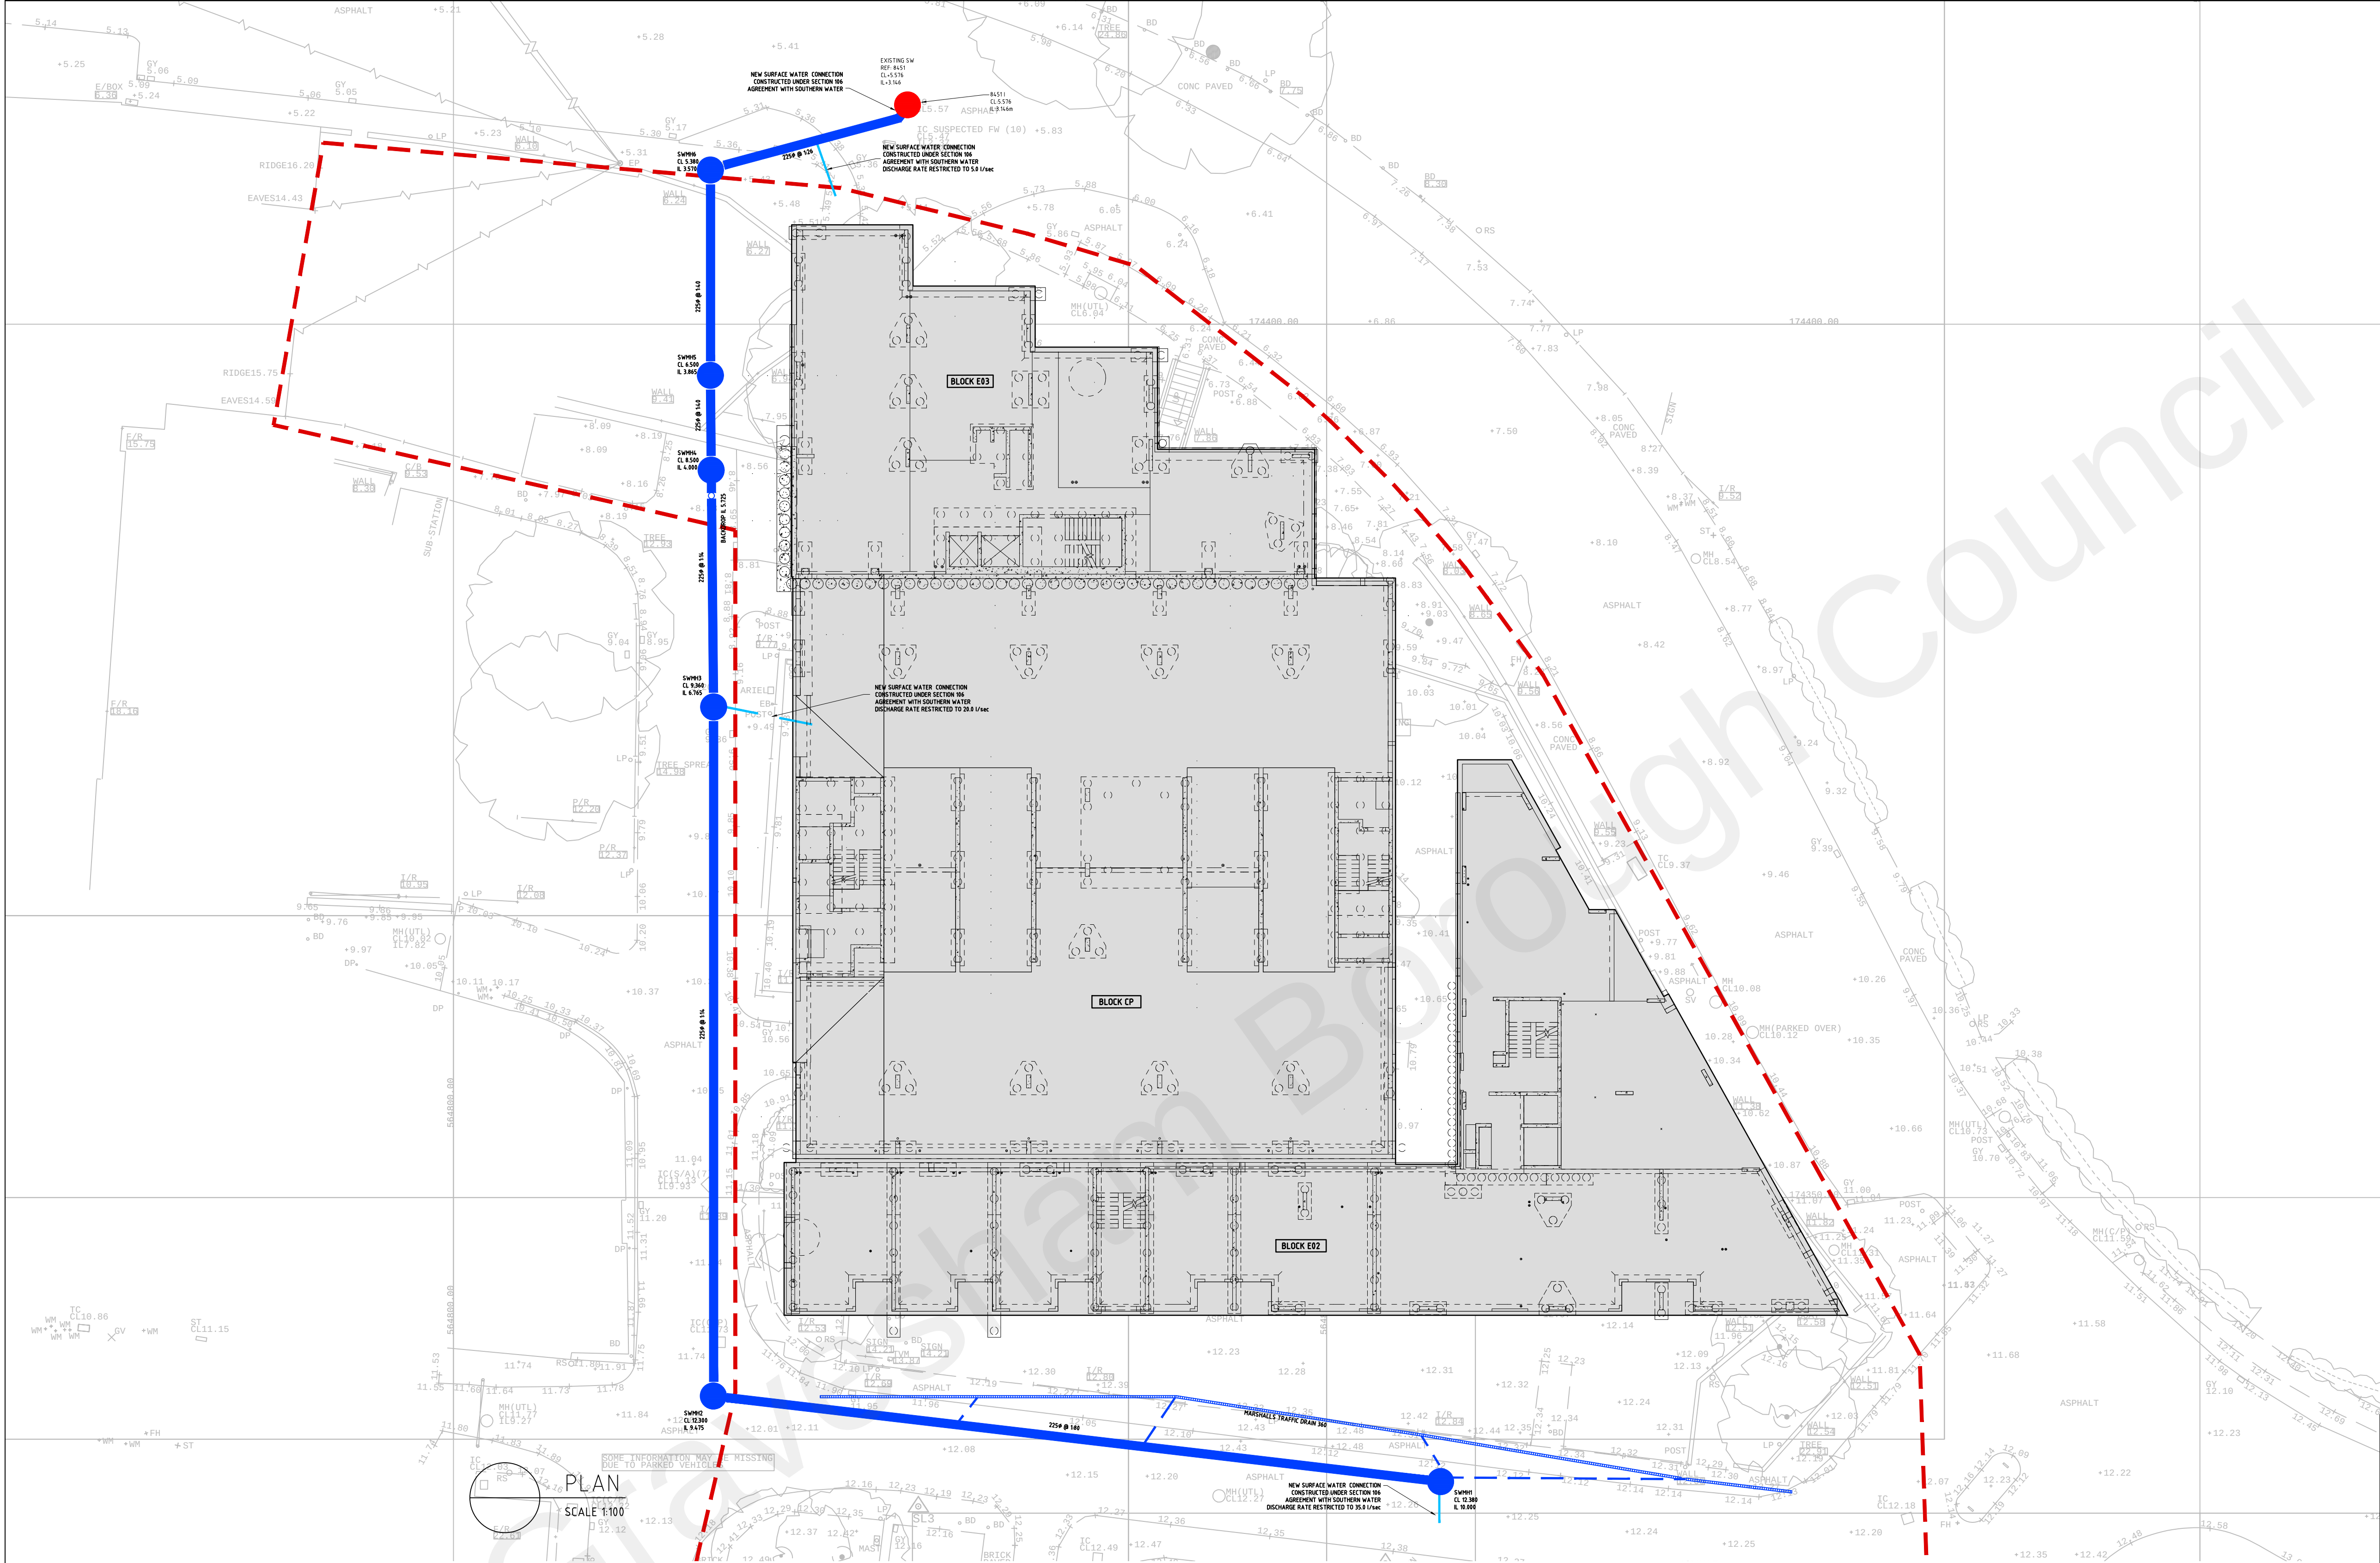

LEGEND

- PROPOSED SW SEWER
- SITE BOUNDARY

STORM WATER DRAINAGE SCHEDULE									
MH REF	COVER LEVEL	INVERT LEVEL	DEPTH (m)	DESCRIPTION	DIMENSION	COVER TYPE	COMMENTS	EASTING	NORTHINGS
SWMH1	12.300	10.500	2.300	D408	Ø 225	D408	-	564856.526	174338.740
SWMH2	12.300	9.475	2.825	TYPE 2	Ø 225	D408	-	564814.889	174338.638
SWMH3	9.360	6.765	2.595	TYPE 2	Ø 225	D408	-	564814.901	174377.090
SWMH4	8.500	4.000	4.500	TYPE 2	Ø 225	D408	-	564814.765	174391.644
SWMH5	6.500	3.865	2.635	TYPE 2	Ø 225	D408	-	564814.719	174397.070
SWMH6	5.380	3.570	1.810	TYPE 2	Ø 225	D408	-	564814.720	174408.821

NOTE: COVER LEVELS SHOWN ARE APPROXIMATE AND ARE TO BE CONFIRMED WHEN PROPOSED FINISHED GROUND LEVEL INFORMATION IS MADE AVAILABLE FROM THE ARCHITECT

- DISCLAIMER NOTE**
- The Copyright and design right of the design documents and of the design remains that of Manhire Associates Ltd. All copies are only for information about the application, they may not be used for any other purpose or copied without the express written permission of Manhire Associates Ltd.
- NOTES:**
- DO NOT SCALE THIS DRAWING.
 - THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWING ISSUES AND THE SPECIFICATION.
 - MANHOLES SITUATED WITHIN AREAS ACCESSIBLE TO MOTOR VEHICLES ARE TO BE FITTED WITH SUITABLE STRENGTH COVERS AND FRAMES.
 - REFERENCE SHOULD BE MADE TO THE STRUCTURAL DRAWINGS FOR ALL ASPECTS OF FOUNDATION DESIGN AND CONSTRUCTION.
 - THE CONTRACTOR SHOULD CHECK ALL DIMENSIONS ON SITE.
 - IT IS THE SUBCONTRACTORS RESPONSIBILITY TO ENSURE COMPLIANCE WITH CURRENT BUILDING REGULATIONS AND CODES OF PRACTICE.
 - CONNECTIONS TO AND DIVERSIONS OF EXISTING DRAINAGE ARE TO BE CHECKED FOR LEVEL AND POSITION PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION ON SITE. ANY SIGNIFICANT DIFFERENCES ARE TO BE REPORTED TO THIS OFFICE SO THAT DESIGNS MAY BE ADJUSTED ACCORDINGLY.
 - EXISTING DRAINAGE CONNECTIONS TO BE TRACED ON SITE, INVERT LEVELS RECORDED AND ENDS CAPPED OFF UNLESS IDENTIFIED FOR RE-USE.
 - ALL ADAPTABLE SEWERS ARE TO BE CONSTRUCTED FROM VITRIFIED CLAY PIPES IN ACCORDANCE WITH SEWERS FOR ADOPTION 7th EDITION.
 - ALL ADAPTABLE SEWERS SHALL BE CONSTRUCTED TO THE STANDARDS LAID DOWN IN "SEWERS FOR ADOPTION" 7th EDITION AND SOUTHERN WATER'S SPECIFICATION WITH A VIEW TO ADOPTION UPON COMPLETION.
 - ALL SEWERS WITH LESS THAN 1.2m OF COVER WHEN LAID BENEATH THE ROADS, OR 0.9m OF COVER IN OTHER AREAS, SHALL BE PROTECTED WITH CONCRETE IN ACCORDANCE WITH EITHER OF THE DETAILS SHOWN ON THE STANDARD DRAWING PROVIDED.

ALL ADAPTABLE DRAINAGE WORKS TO BE CONSTRUCTED IN ACCORDANCE WITH SEWERS FOR ADOPTION 7TH EDITION

REV	DATE	DESCRIPTION	BY
P1	05/01/22	PRELIMINARY ISSUE	RH
DRG STATUS			
PRELIMINARY			
CLIENT			
REEF GROUP			
PROJECT			
THE CHARTER GRAVESEND			
DRG TITLE			
SECTION 104 PLAN			
PROJECT NO			
19042			
DRG NO			
C1142			
REV			
P1			
SCALE			
1:100			
DATE			
JAN 22			

Manhire Associates Limited
CONSULTING ENGINEERS

Manhire Associates Limited
Consulting Engineers
Hanover House
76 Coombe Road, Norbiton
Kingston Upon Thames, KT2 7AZ
T: +44 20 8390 9097
F: +44 20 8390 7888
E: enquiries@manhireassociates.co.uk