

NOTES:-

All dimensions must be checked on site and not scaled from this drawing.

These drawings to be read in conjunction with Structural Engineers specification.
All materials to be fixed in strict accordance with manufacturers specification.

All structural timber to be preservative treated.
All linetels to have a minimum end bearing of 150mm.
All new windows to contain openable areas equal to 1/20th of floor area of enclosed room & fitted with trickle ventilators.
Minimum area 8000mm² for habitable rooms & minimum 4000mm² for all other rooms unless stated.

Prior to commencement of work:-

- All existing foundations & linetels over openings which will have an increased loading, are to be exposed to check their load bearing capacity to full Local Authority satisfaction as agreed on site, & if found necessary to be amended to their full approvals.
- existing drains which are to be used, are to be exposed to check position & depth is correct for use.
- all existing drains which are to be built over are to be exposed & if found in sound condition to be encased in 150mm thick concrete, with 13mm thick compressable board movement joints in concrete at every pipe joint, maximum 5000L, to full Local Authority satisfaction as agreed on site.
- all existing services where needing to be altered or extended are to be clarified by the builders with the owners.
- the contractor is to check all setting out and any discrepancies to be reported.
- all work is to be carried out in accordance with the latest Building Regulations and British Standards.
- No work is to encroach over adjoining land without the written permission of the owner prior to commencement of work.
- All linetels to be insulated to give U value of 1.2 w/m²k.
- All glazing to be toughened glass to BS 6206.

Surface water taken to existing surface water drain which is to be exposed & outfall checked for suitability to full Local Authority satisfaction as agreed on site. If existing drains are found to be unsuitable for use, lay 100mm dia, Terrain UPVC drain with 150mm surround of granular fill & lead to falls to new soakaway, sited not less than 5000mm from any building & constructed upon chamber of a size to Local Authority satisfaction. Where any drain passes through wall it is to be fully encased in concrete linetel over and a minimum 50mm gap around the pipe with rigid masking.
Lay minimum 100mm dia. UPVC ducts under new concrete floor to existing suspended floor vents.

A		Date	Revision

©Copyright

Harry Bailey

ARCHITECTURAL DESIGNS
116 KINGS ROAD,
BIGGIN HILL,
KENT,
TN16 3NQ

TEL: 01959 575720

Mob: 07885 756 808

email: hbailey@hotmail.co.uk

Client

Mr. & Mrs. S. Perez

Job Title

4 NORTH LAKE
HILHAM

Drawing Title

PROPOSED ELEVATIONS.

Scale

1/100 @ A3.

Date

20.12.24

Drawn



HB

Dwg No:


394/4

Rev:

Scale Bar

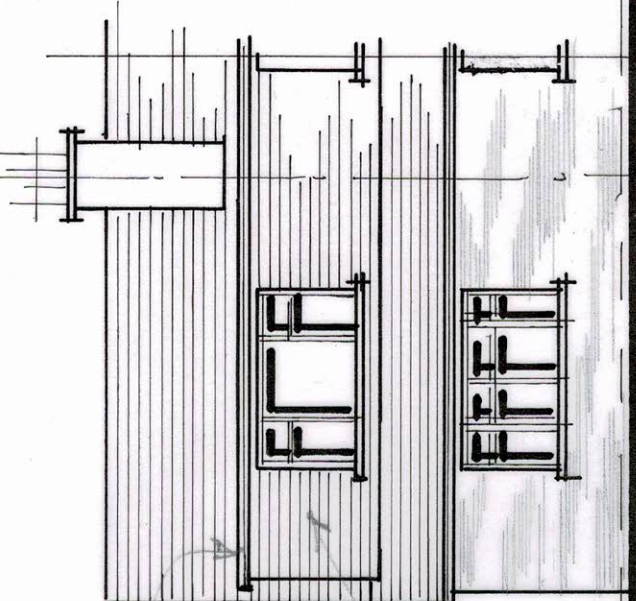

PROPOSED FRONT ELEVATION.

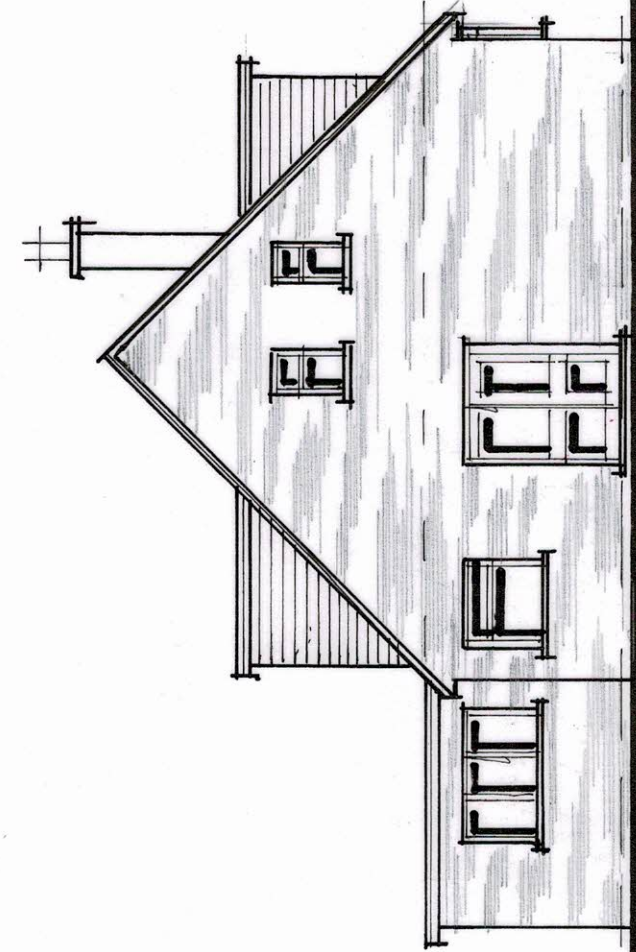

PROPOSED SIDE ELEVATION.

Build up this
Ties to existing
EXTENSION