

CDM 2015 RESIDUAL RISKS

1. The Contractor is to locate, protect and divert as necessary all existing services on site prior to commencing work.
2. All areas of excavation are to be scanned and marked for existing services prior to any excavation.
3. Be aware of possible live drainage flows and foul effluent during construction. The Contractor shall assess and implement a safe working system and equipment (PPE) as necessary.
4. When working with live drainage there is an increased risk from waterborne diseases such as leptospirosis and wells disease.
5. Site is in proximity to Network Rail land, Railway embankment and Railway.
6. UXO risk (Unexploded Ordnance). Contractor to undertake all reasonable precaution to mitigate the risk of unexploded ordnance on site, in accordance with recommendations in site investigation report.

The above residual risks are for non-standard hazards. It is assumed that a competent contractor familiar with the construction of this type of work will be appointed who will be aware of the standard hazards.




prior to procurement and construction.

DO NOT SCALE THIS DRAWING. ALL SETTING OUT TO ARCHITECT'S DETAILS AND DRAWINGS

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWING ISSUES AND THE SPECIFICATION.

Notes:

- G1. All building materials, components and workmanship to comply with the appropriate public health acts, building regulations, british standards and codes of practice and the appropriate manufacturer's recommendations.
- G2. For all specialist work see relevant drawings.
- G3. Any discrepancies, errors or omissions to be reported to the project co-ordinator for further instructions before commencement of works.
- G4. The Engineer is not responsible for dimensions, except where shown on his drawings. All setting out information, dimensions, etc, shall be calculated from the Architect's drawings.
- S1. All block work paths to be edged with block stretcher course unless otherwise stated.
- S2. Granite ramps denoted by proposed granite setts.

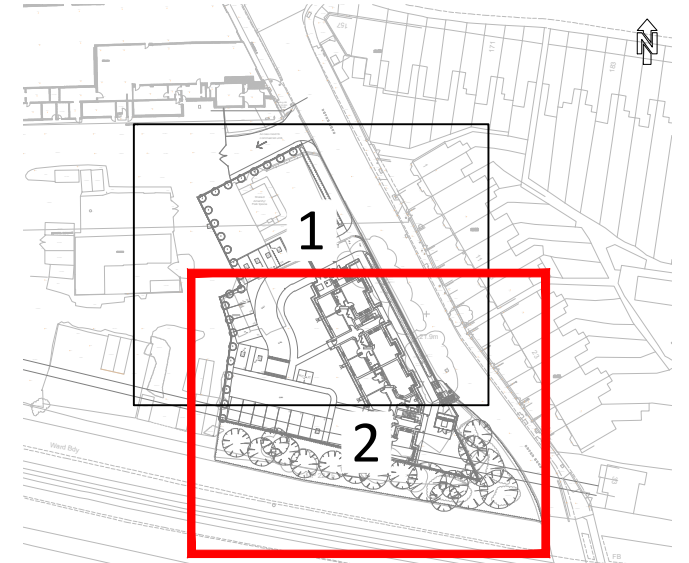

KEY PLAN

P04	Amended to updated site layout	KC	MIF	22.11.24
P03	Level raised & Quadrants added	MIF	JEM	02.11.21
P02	PRELIMINARY ISSUE	MIF	JEM	04.02.21
P01	DRAFT ISSUE	AM	MIF	04.12.20
Rev	Amendment	Drn	Chk	Date

considine
civil + structural engineers

25 Hollingworth Court, Turkey Mill
Ashford Road, Maidstone, Kent ME14 5PP
t: 01622 919918 e: info@considine.co.uk
www.considine.co.uk

Client:
BRT PROPERTIES KENT LTD

Project:
2 VALE ROAD, NORTHFLEET
GRAVESEND
KENT, DA11 8BZ


Drawing Title:
ENGINEERING LAYOUT
SHEET 2 OF 2

considine ref	drawn by	date	drawing scales	original paper size
3474	AM	DEC' 20	1:100@A1, 1:200@A3	A1

drawing reference :	project	originator	volume	level	type	role	number
3474- CON - 00 - XX - DR - C - 1501							

status :	status description :
S0	SUITABLE FOR INFORMATION
revision :	revision status :
P04	PRELIMINARY

- + 12.345 Proposed Level
- + [12.345] Existing Level Interpolated
- Tangent Point
- 1/123 Proposed Gradient
- ▴ Proposed Transition Kerb
- Proposed HB2 Kerb with 125mm Upstand
- Proposed Bull Nosed Kerb with 25mm Upstand
- Proposed Bull Nosed Kerb with 0mm Upstand
- Proposed Edging
- (RW) Proposed Retaining Structure.
- Proposed Quadrant Kerb
- Proposed Major Contour
- Proposed Minor Contour



SCALE 1-100