
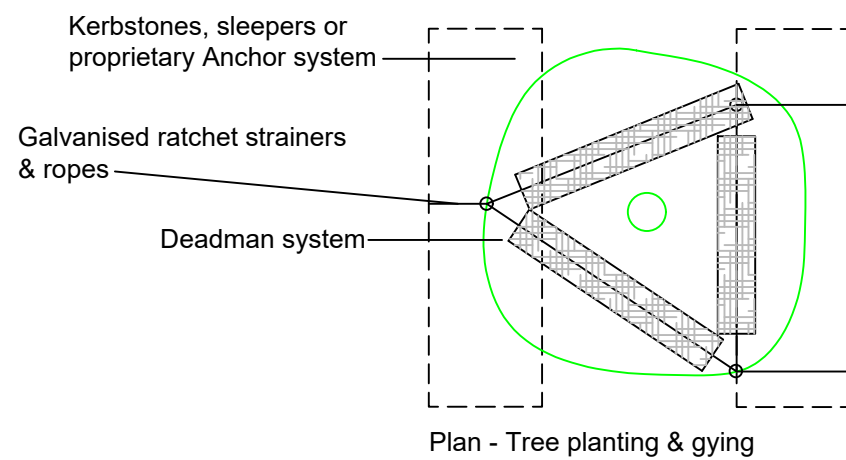


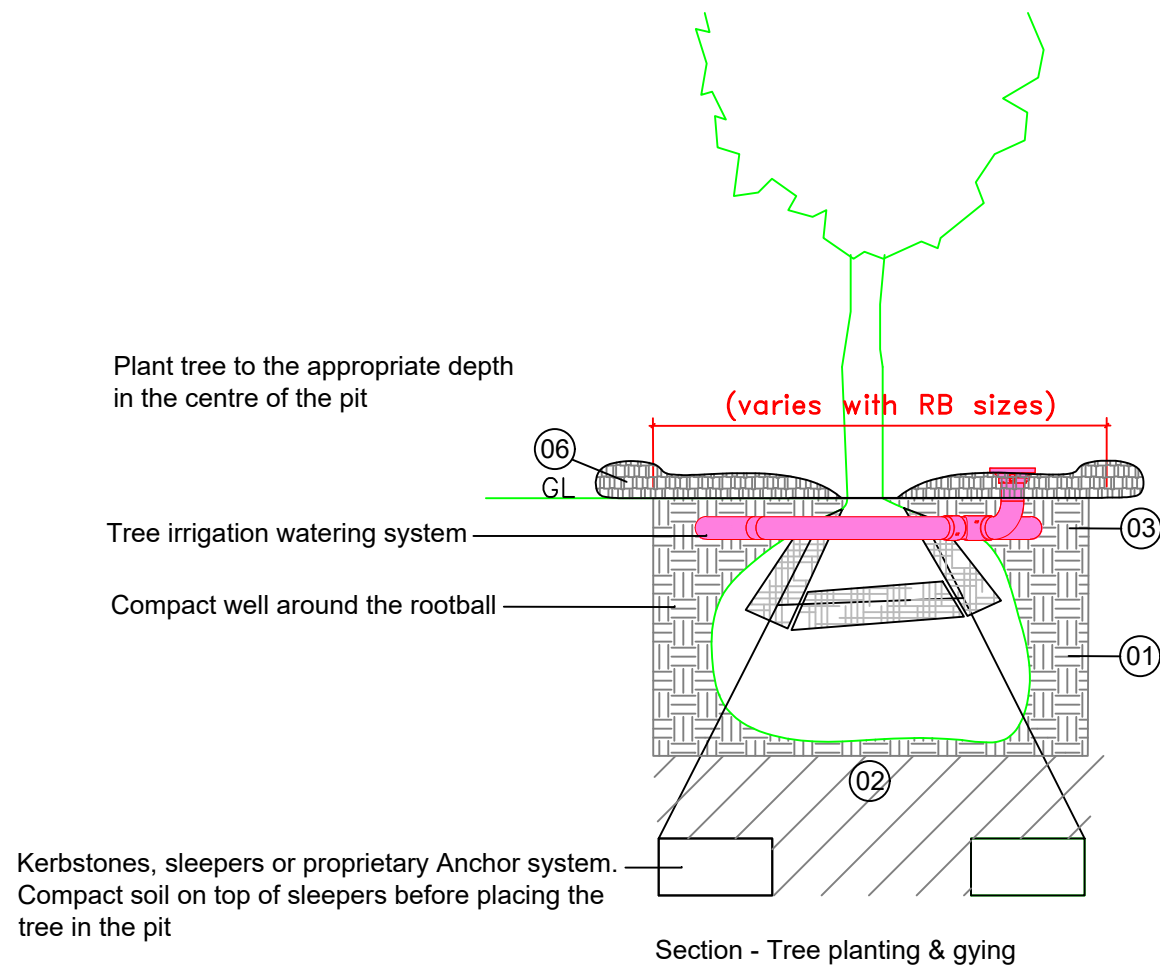

Notes

01- Dig wide planting hole at least 150mm wider and approximately the same depth as the rooting zone.

02- Leave the base of the tree pit undisturbed unless there is poor drainage, soil smearing or pan needing to be rectified.

03- Backfill with soil that came from the original hole. If in situ soils is not suitable use Imported topsoil to BS 3882: general purpose grade.

04- Planting
Deciduous Trees
Plant during the season November - March.

Conifers Trees
September/October or April/May

Carry out preparation and planting while soil and weather conditions are suitable.

Do not plant in periods of wet weather when working the soil would result in a loss of structure, or during periods of heavy frost or strong winds.

05- Trees should be watered prior planting and backfilled planting pits watered to full depth of topsoil after planting.

06- Mulch over the rootball (50-100mm) and 150mm beyond the perimeter of the tree pit with bark or wood chip to control weeds, conserve soil moisture and moderate soil temperatures.

A Site address revised 23.08.24 SG



Ginger Landscape, 95 Park Meadow, Hatfield AL95HE
Tel: 07790451553
sylviegabbey@me.com

PROJECT LAND TO THE WEST OF
NURSERY MEWS - GRAVESEND

DRAWING TITLE TYPICAL
TREE PLANTING DETAIL

DATE	August 2024	DRAWN	SG
SCALE	1:20 @A3	CHECK	
STATUS	PLANNING		
JOB NO.	0286		
DRAWING NO.	L010	REVISION	A