

AWNING SPECIFICATION (CONSERVATION AREA – GRAVESHAM)

Awning Type: Traditional retractable external awning

Form: Open or half-cassette system with discreet housing
Projection: 2000 mm
Width: 7100 mm

Fabric Specification

Material: Solution-dyed acrylic awning fabric
Finish: Matt, woven, canvas-textured surface
Appearance: Traditional, non-reflective, conservation-appropriate
Weight: Approx. 300–305 g/m²
Thickness: Approx. 0.55 mm
Colour: Heritage neutral tone
UV Protection: High UV resistance suitable for external use
Colour Fastness: High resistance to fading
Water Resistance: Shower-resistant (sun and light rain protection)
Breathability: Breathable fabric to prevent moisture build-up
Mould & Mildew Resistance: Suitable for UK climate conditions

Frame & Fixings:

Frame Material: Powder-coated aluminium or painted steel
Colour: Heritage neutral tone

Fixings:

Reversible mechanical fixings
Fixed into mortar joints where feasible
No cutting or removal of historic masonry

Conservation & Installation Notes:


Awning to remain visually subservient to host building
No illumination, logos, or signage incorporated
Fully retractable to preserve façade appearance when not in use
Installation to avoid damage to architectural detailing
System to be fully reversible

Maintenance:

Clean using water and mild detergent only

Planning Note

Awning to be installed in accordance with Gravesham Borough Council Conservation Area requirements.

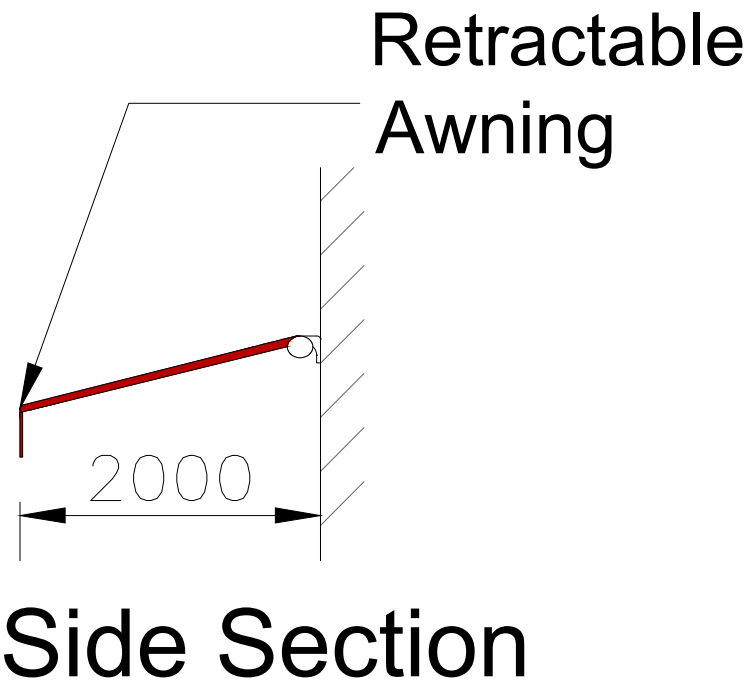

 e - info@dreamdesigndevelop.co.uk m - 07500444330	Site: 26 King Street Gravesend DA12 2DU	Title: Proposed Awning Details	Scale at A3: 1:50	Date: 09/01/2026
			Drawing no.: 004	Revision: A