

Sign Proposals

Built Up Wickes Sign

Size: Site Specific
Overall Returns: 150mm
Tray Returns: 50mm
Border Returns:
95mm U-Channel + 5mm Opal
Letter Returns: 75mm

Item Description:
A 1 no of folded aluminium tray fixed on angles and spaced off cladding/wall by 5-10mm, complete with internal top hat sections.

B Aluminium tray has face fixed 50x50mm galvanised mesh to face via self-drilling drywall screws & galvanised plate washers.


C 1 no of U-channel borders with opal acrylic faces fixed to aluminium tray. Border is clad with 1.2mm galvanised steel trim with 30mm rim.

D Letters are built up 5mm opal acrylic and face fixed to aluminium tray. Letter returns are clad with 1.2mm galvanised steel with 100mm returns (protrudes 25mm past letter face), and sprayed blue to inside edge only.

Illumination Detail:
LEDs to face illuminate opal border and 'Wickes' letter face detail only.

Production Notes:
Opal acrylic requires rebated panel joints to avoid shadowing to illuminated letter/border faces.

NOTE - ALL LETTERS MUST USE:
Scotchlok Self-Stripping
Electrical Pigtail Connectors
(Flame Retardant)

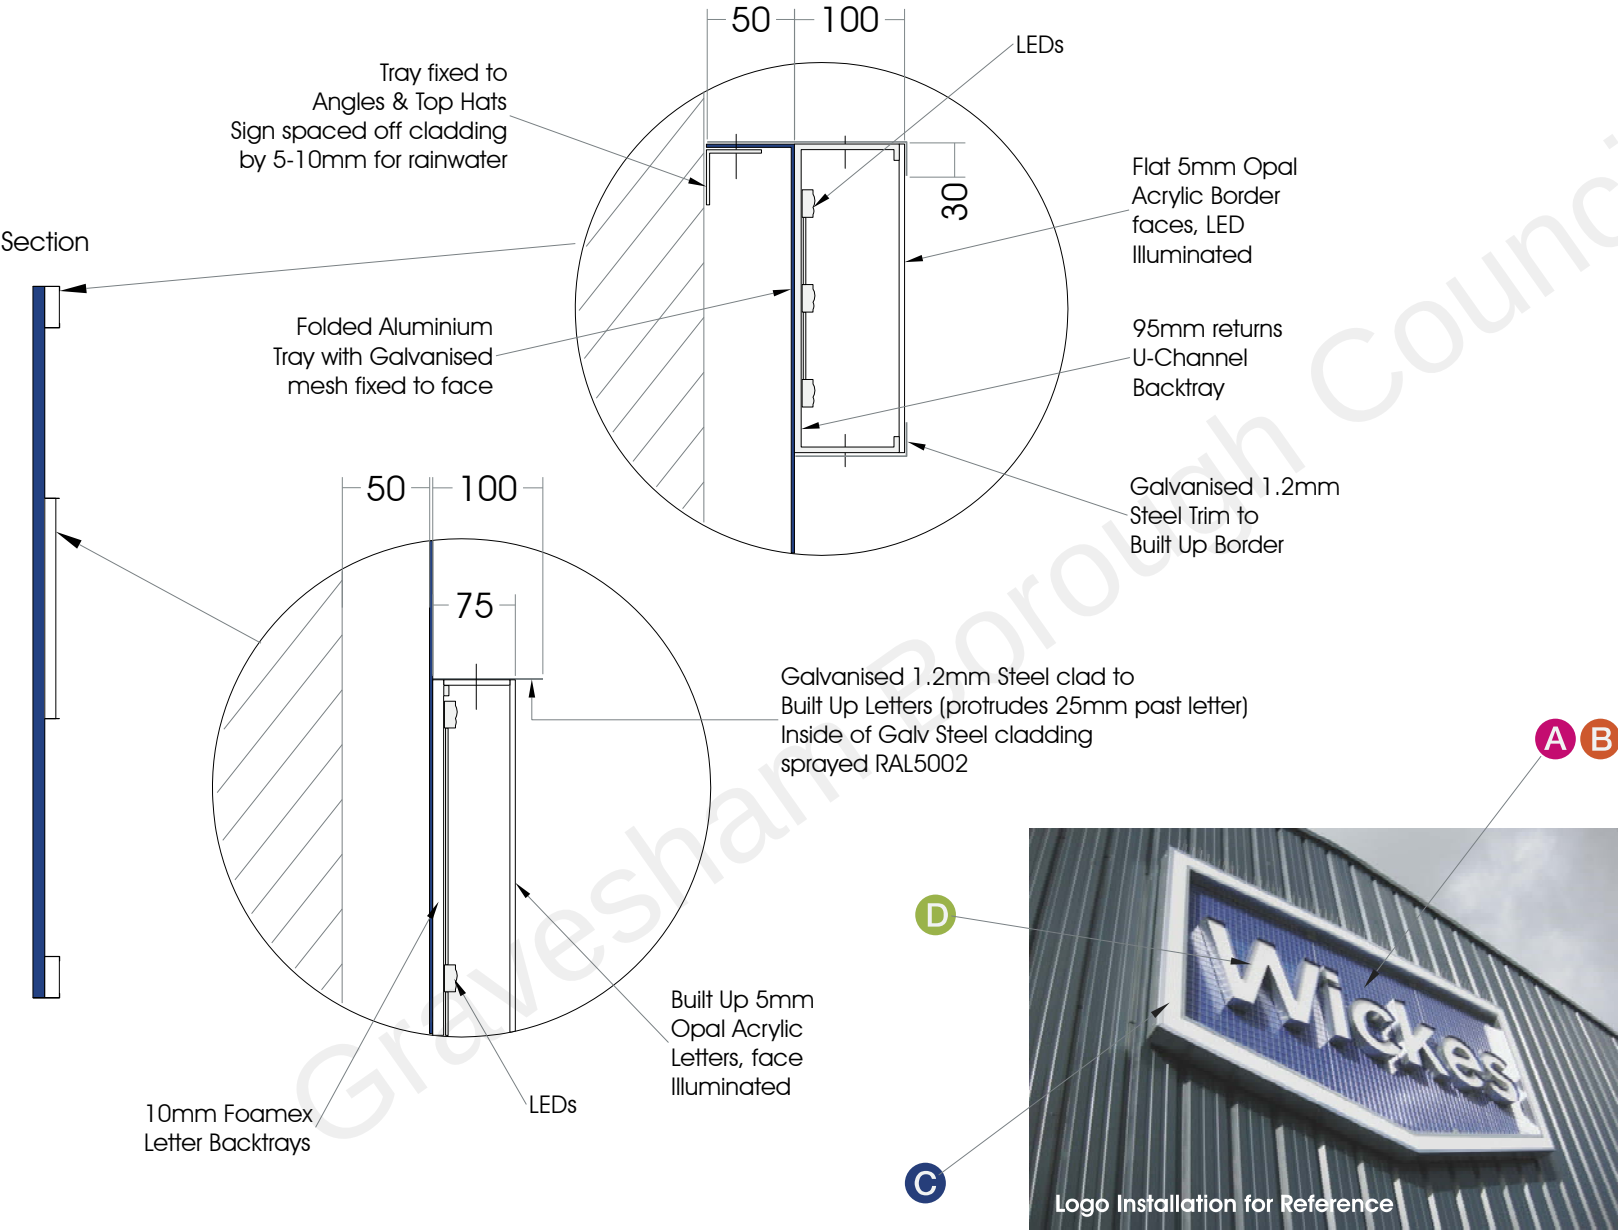

This Drawing & information contained may not be copied or used without prior consent from Spencer Signs. Colour shown may not accurately match any colour references. Sizes in mm unless stated otherwise.

Wickes

DRG. NO.
71041-A

Date
09/02/16

Checked

Rev.
A

Date
21/03/2017

Initial
CW

Revision Detail
Mesh fixings amended

NOTES

Generic Drawing
for visual use only
not for scaling

Specification checked and approved for Production By
(sign & print name)

Typeface(s)/Colours
Helvetica Bold
Helvetica Black

P288 C

RAL5002

P432 C

RAL5008

White

White

50x50 12g

Zinc Mesh

Drawn By
CW

Scale
NTS

Drawing Status
Production