


JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 1	Sheet 1 of 1
---	-------------------------	---------------------	------------------------

Diagram	Sectional Details
---------	-------------------

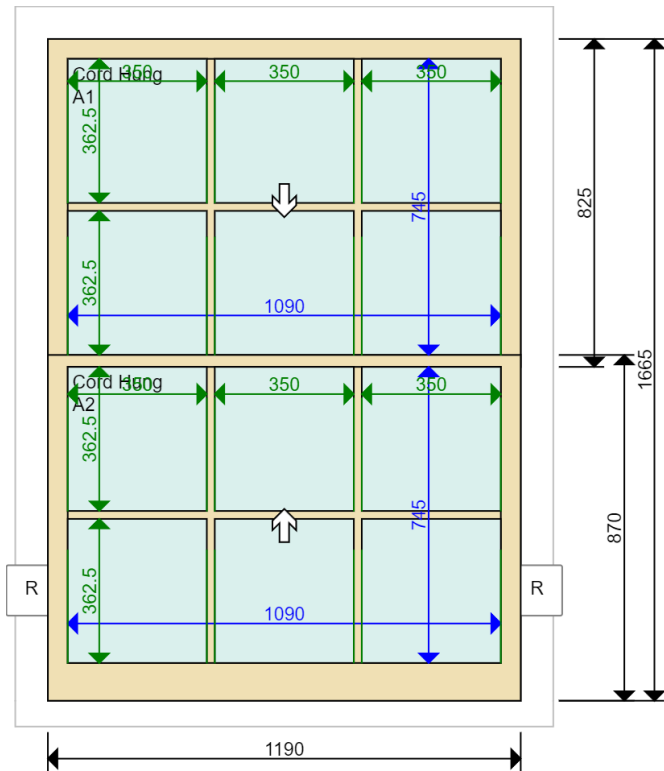

Sash Head	50 mm	
Sash Stile	50 mm	
Sash Btm Rail (int)	95 mm	Square
Sash Midrail	30 mm	
Sash Thickness	36 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Location First Floor LHS Flat 6 living room	Glazing Bar	20 mm (4 mm Nib)
Material Accoya	Profile	Ovolo
Quantity 1 of shown on drawing	Moulding Cutter	6 x 13 with 6 mm shoulder
	Glazing Rebate	8 x 15 mm

Ironmongery 1 x Fitch Catch PB 4 x Rola Lock Back Plate Fastener 2 x Rola Lock Egress PB 2 x Sash Lift PB	Glazing Single Glazed
	Top 4mm Clear Float
	Btm 4mm Clear Float
	Dry Seal
	Paint Finish
	Internal Standard White
	External Standard White
	Cill Standard White


Production Notes	Installation Notes
	Installed: Internally
	1. OUT OF SQ HORIZ 5mm ON CILL.
	2. SPLICE REPAIRS X 2.
2 13 6 15	
Job Tracking Order received: 30-10-2023 Sold by: Andy Macrae Surveyed by: Chris Jewiss	Print date: 06-12-2023 Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 2	Sheet 1 of 1
---	-------------------------	---------------------	------------------------

Diagram	Sectional Details
---------	-------------------

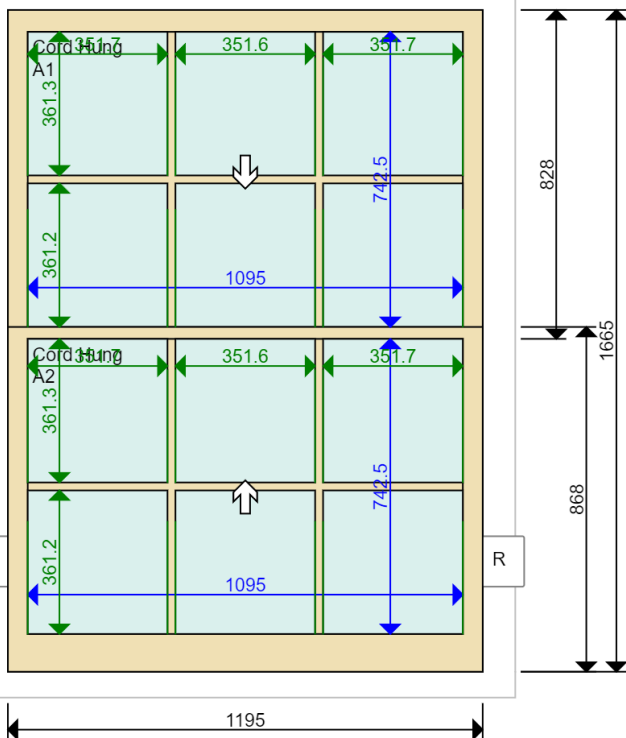

Sash Head	55 mm	
Sash Stile	50 mm	
Sash Btm Rail (int)	95 mm	Square
Sash Midrail	30 mm	
Sash Thickness	36 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Location First Floor LHS Flat 6 Kitchen	Glazing Bar 20 mm (4 mm Nib)
Material Accoya	Profile Ovolo
Quantity 1 of shown on drawing	Moulding Cutter 6 x 13 with 6 mm shoulder
	Glazing Rebate 8 x 15 mm

Ironmongery 1 x Fitch Catch PB 4 x Rola Lock Back Plate Fastener 2 x Rola Lock Egress PB 2 x Sash Lift PB	Glazing Single Glazed
	Top 4mm Clear Float
	Btm 4mm Clear Float
	Dry Seal
	Paint Finish
	Internal Standard White
	External Standard White
	Cill Standard White


Production Notes	Installation Notes
	Installed: Internally
	1. OUT OF SQ HORIZ 5mm ON HEAD.
	2. SPLICE REPAIRS X 2.
2 13 6 15	
Job Tracking Order received: 30-10-2023 Sold by: Andy Macrae Surveyed by: Chris Jewiss	Print date: 06-12-2023 Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Spiral Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 3	Sheet 1 of 1
---	-------------------------	---------------------	------------------------

Diagram	Sectional Details
---------	-------------------

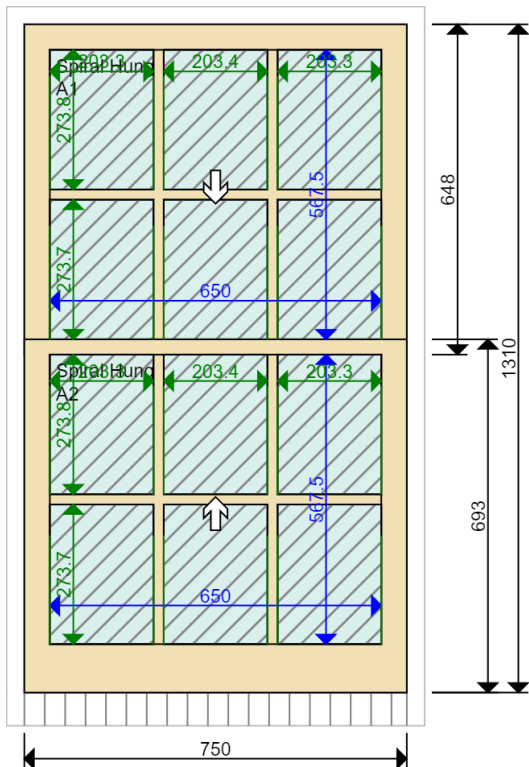

Sash Head	50 mm	
Sash Stile	50 mm	
Sash Btm Rail (int)	95 mm	Square
Sash Midrail	30 mm	
Sash Thickness	39 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Location First Floor Rear Flat 6 Bathroom	Glazing Bar 20 mm (4 mm Nib)
Material Accoya	Profile Ovolo
Quantity 1 of shown on drawing	Moulding Cutter 6 x 13 with 10 mm should.
	Glazing Rebate 8 x 14 mm

Ironmongery 1 x Fitch Catch PB 4 x Rola Lock Back Plate Fastener 2 x Rola Lock Egress PB 2 x Sash Lift PB	Glazing Single Glazed
	Top 4mm Stippolyte Float
	Btm 4mm Stippolyte Float Toughened
	Dry Seal
	Paint Finish
	Internal Standard White
	External Standard White
	Cill Standard White

Production Notes *REBATE SASH STILES FOR SPIRALS TOP AND BOTTOM.	Installation Notes Installed: Internally 1. SCRAPE AND FILL CILL.
---	---

2 | 13 | 10 | 14


Job Tracking	
Order received: 30-10-2023	Print date: 06-12-2023
Sold by: Andy Macrae	
Surveyed by: Chris Jewiss	Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Complete New Single Spiral Sash Window (DocL / WER) (Classic)

Customer Fortside Investments Limited	Job No C37337	Item No 4	Sheet 1 of 1
---	-------------------------	---------------------	------------------------

Diagram

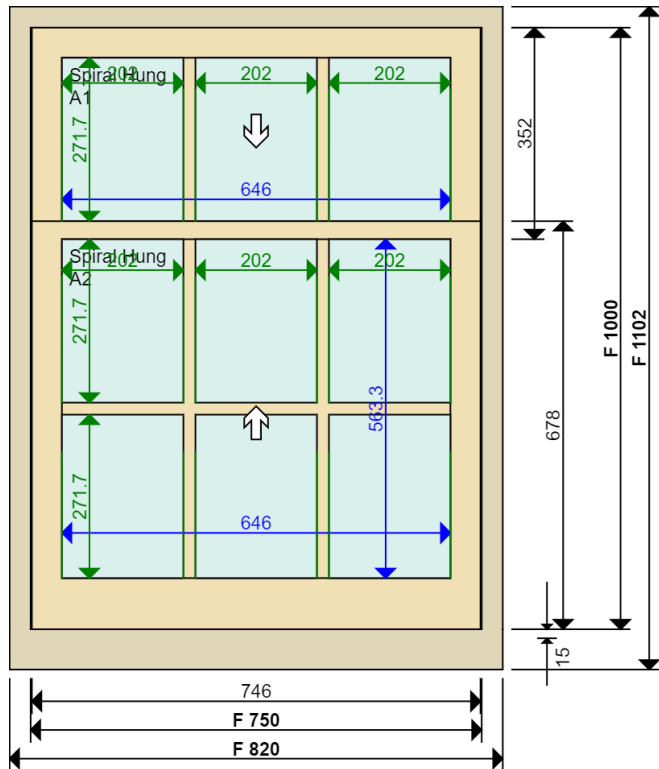

Sectional Details

Jamb Type	Solid Spiral for Sash
Inner Head	134 x 35 mm
Inner Jamb	134 x 35 mm
Cill	169 x 67 mm
Sash Head	50 mm
Sash Stile	50 mm
Sash Btm Rail (int)	85 mm Stepped
Sash Midrail	30 mm
Sash Thickness	39 mm
Top Sash Horn	No horn
Btm Sash Horn	No horn
Glazing Bar	20 mm (4 mm Nib)
Profile	Ovolo
Moulding Cutter	6 x 13 with 10 mm should.
Glazing Rebate	8 x 14 mm

Location

Second Floor Rear Flat 6 Main Bedroom

Material Accoya sashes, Accoya frame, Accoya cill	Quantity 1 of shown on drawing
---	---

Ironmongery

1 x Fitch Catch PB
4 x Rola Lock Back Plate Fastener
2 x Rola Lock Egress PB
2 x Sash Lift PB

Glazing

Single Glazed
Top 4mm Clear Float
Btm 4mm Clear Float

Dry Seal

Paint Finish

Internal Standard White
External Standard White
Cill Standard White

Production Notes

*CILL EXTENSION LOOSE ON AMS.
*SPIRALS FRAME RECESSED INTERNALLY

Installation Notes

Installed: Externally
External Access: Scaffold by Customer
Cable Alarm: Customer to Remove
Dormer Issues: Dormer with External Lining

1. FIT FRAME ON SAME INTERNAL POSITION.
2. FIT 2 PART LINERS EXTERNALLY TO THE SIDES AND BELOW THE EAVES. CURRENTLY 35mm THICK WITH BEVEL PROFILE, NEW TO BE 20mm FLAT PROFILE.
3. FIT QUADS INTERNALLY AND OVOLO STOP TO HEAD. FIT WINDOWBOARD.

2 | 13 | 10 | 14

Job Tracking

Order received: 30-10-2023 Print date: 06-12-2023
Sold by: Andy Macrae
Surveyed by: Chris Jewiss Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Complete New Single Spiral Sash Window (DocL / WER) (Classic)

Customer

Fortside Investments Limited

Job No

C37337


Item No	Item Description	Unit	Quantity	Unit Price	Total Price
1	...	...	...	...	...
2	...	...	...	...	...
3	...	...	...	...	...
4	...	...	...	...	...
5	...	...	...	...	...
6	...	...	...	...	...
7	...	...	...	...	...
8	...	...	...	...	...
9	...	...	...	...	...
10	...	...	...	...	...
11	...	...	...	...	...
12	...	...	...	...	...
13	...	...	...	...	...
14	...	...	...	...	...
15	...	...	...	...	...
16	...	...	...	...	...
17	...	...	...	...	...
18	...	...	...	...	...
19	...	...	...	...	...
20	...	...	...	...	...
21	...	...	...	...	...
22	...	...	...	...	...
23	...	...	...	...	...
24	...	...	...	...	...
25	...	...	...	...	...
26	...	...	...	...	...
27	...	...	...	...	...
28	...	...	...	...	...
29	...	...	...	...	...
30	...	...	...	...	...
31	...	...	...	...	...
32	...	...	...	...	...
33	...	...	...	...	...
34	...	...	...	...	...
35	...	...	...	...	...
36	...	...	...	...	...
37	...	...	...	...	...
38	...	...	...	...	...
39	...	...	...	...	...
40	...	...	...	...	...
41	...	...	...	...	...
42	...	...	...	...	...
43	...	...	...	...	...
44	...	...	...	...	...
45	...	...	...	...	...
46	...	...	...	...	...
47	...	...	...	...	...
48	...	...	...	...	...
49	...	...	...	...	...
50	...	...	...	...	...
51	...	...	...	...	...
52	...	...	...	...	...
53	...	...	...	...	...
54	...	...	...	...	...
55	...	...	...	...	...
56	...	...	...	...	...
57	...	...	...	...	...
58	...	...	...	...	...
59	...	...	...	...	...
60	...	...	...	...	...
61	...	...	...	...	...
62	...	...	...	...	...
63	...	...	...	...	...
64	...	...	...	...	...
65	...	...	...	...	...
66	...	...	...	...	...
67	...	...	...	...	...
68	...	...	...	...	...
69	...	...	...	...	...
70	...	...	...	...	...
71	...	...	...	...	...
72	...	...	...	...	...
73	...	...	...	...	...
74	...	...	...	...	...
75	...	...	...	...	...
76	...	...	...	...	...
77	...	...	...	...	...
78	...	...	...	...	...
79	...	...	...	...	...
80	...	...	...	...	...
81	...	...	...	...	...
82	...	...	...	...	...
83	...	...	...	...	...
84	...	...	...	...	...
85	...	...	...	...	...
86	...	...	...	...	...
87	...	...	...	...	...
88	...	...	...	...	...
89	...	...	...	...	...
90	...	...	...	...</	

5

Sheet

1 of 1

Diagram

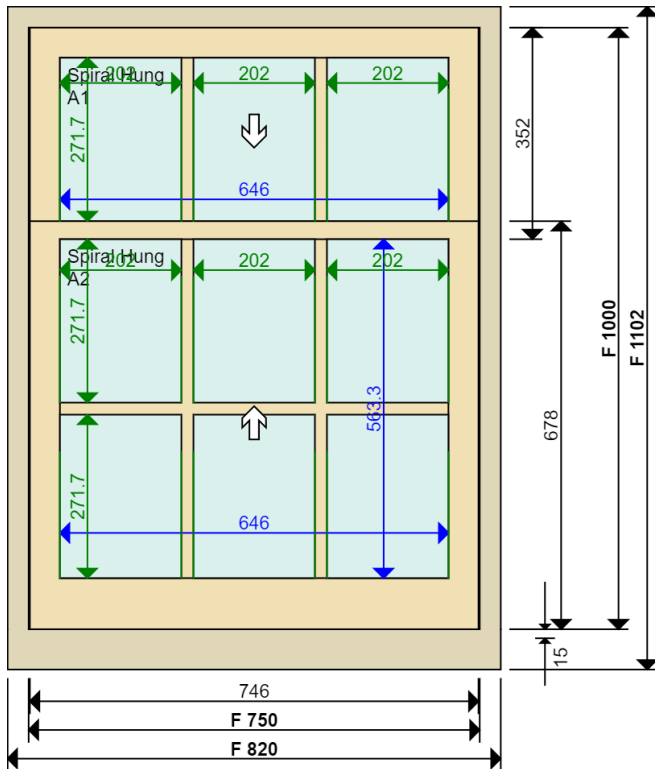

Sectional Details

Jamb Type	Solid Spiral for Sash
Inner Head	134 x 35 mm
Inner Jamb	134 x 35 mm
Cill	169 x 67 mm



Sash Head	50 mm	
Sash Stile	50 mm	
Sash Btm Rail (int)	85 mm	Stepped
Sash Midrail	30 mm	
Sash Thickness	39 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Location

Second Floor Front Flat 6 Guest Bedroom

Glazing Bar	20 mm (4 mm Nib)
Profile	Ovolo
Moulding Cutter	6 x 13 with 10 mm should.
Glazing Rebate	8 x 14 mm

Material

**Accoya sashes,
Accoya frame, Accoya cill**

Quantity

1
of shown on drawing

Ironmongery

1 x Fitch Catch PB
4 x Rola Lock Back Plate Fastener
2 x Rola Lock Egress PB
2 x Sash Lift PB

Glazing

Single Glazed
4mm Clear Float
4mm Clear Float

Dry Seal

Paint Finish

Internal	Standard White
External	Standard White
Cill	Standard White

Production Notes

*CILL EXTENSION LOOSE ON AMS.
*SPIRALS FRAME RECESSED INTERNALLY

Installation Notes

Installed:	Externally
External Access:	Scaffold by Customer
Dormer Issues:	Dormer with External Lining

1. FIT FRAME ON SAME INTERNAL POSITION.
2. FIT 2 PART LINERS EXTERNALLY TO THE SIDES AND BELOW THE EAVES. CURRENTLY 35mm THICK WITH BEVEL PROFILE, NEW TO BE 20mm FLAT PROFILE.
3. FIT QUADS INTERNALLY AND OVOLO STOP TO HEAD. FIT WINDOWBOARD.

2 | 13 | 10 | 14

Job Tracking

Order received: 30-10-2023

Print date: 06-12-2023

Sold by: Andy Macrae

Last modified date: 06-12-2023




JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 6	Sheet 1 of 1
---	-------------------------	---------------------	------------------------

Diagram	Sectional Details
---------	-------------------

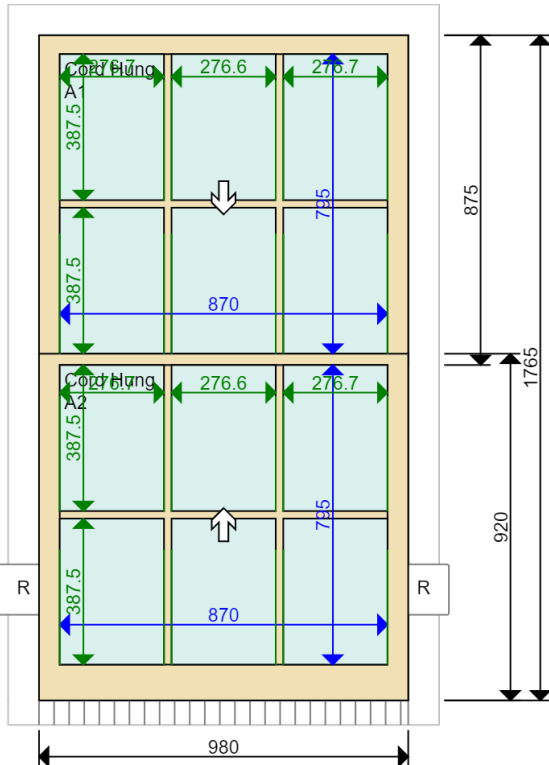

Sash Head	50 mm	
Sash Stile	55 mm	
Sash Btm Rail (int)	95 mm	Square
Sash Midrail	30 mm	
Sash Thickness	36 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Location First Floor RHS Flat 5 Living Room	Glazing Bar	20 mm (4 mm Nib)
Material Accoya	Profile	Ovolo
Quantity 1 of shown on drawing	Moulding Cutter	6 x 13 with 6 mm shoulder
	Glazing Rebate	8 x 15 mm

Ironmongery 1 x Fitch Catch PB 4 x Rola Lock Back Plate Fastener 2 x Rola Lock Egress PB 2 x Sash Lift PB	Glazing Single Glazed Top 4mm Clear Float Btm 4mm Clear Float Dry Seal
	Paint Finish Internal Standard White External Standard White Cill Standard White

Production Notes *DEEPER CORD GROOVES	Installation Notes Installed: Internally THIS ITEM IS LHS. 1. OUT OF SQ VERTICAL 8mm ON CILL. 2. SPLICE REPAIRS X 2 OUTER JAMBS NON STD DETAIL TO MATCH EXISTING. 3. SCRAPE AND FILL CILL.
---	---

2 | 13 | 6 | 15

Job Tracking Order received: 30-10-2023 Sold by: Andy Macrae Surveyed by: Chris Jewiss	Print date: 06-12-2023 Last modified date: 06-12-2023
---	--

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 7	Sheet 1 of 1
---	-------------------------	---------------------	------------------------

Diagram	Sectional Details
	Sash Head 55 mm Sash Stile 55 mm Sash Btm Rail (int) 95 mm Square Sash Midrail 30 mm Sash Thickness 36 mm Top Sash Horn No horn Btm Sash Horn No horn

Location First Floor RHS Flat 5 Living Room	Glazing Bar 20 mm (4 mm Nib) Profile Ovolo Moulding Cutter 6 x 13 with 6 mm shoulder Glazing Rebate 8 x 15 mm
Material Accoya	Quantity 1 of shown on drawing

Ironmongery 1 x Fitch Catch PB 4 x Rola Lock Back Plate Fastener 2 x Rola Lock Egress PB 2 x Sash Lift PB	Glazing Single Glazed Top 4mm Clear Float Btm 4mm Clear Float Dry Seal Paint Finish Internal Standard White External Standard White Cill Standard White
---	--


Production Notes *DEEPER CORD GROOVES	Installation Notes Installed: Internally THIS ITEM IS RHS. 1. OUT OF SQ HORIZ 7mm. 2. OUT OF SQ VERTICAL 8mm. 3. SPLICE REPAIRS X 2 OUTER JAMBS NON STD DETAIL TO MATCH EXISTING. 4. NEW CILL NON STANDARD DETAIL.
2 13 6 15	
Job Tracking Order received: 30-10-2023 Sold by: Andy Macrae Surveyed by: Chris Jewiss	Print date: 06-12-2023 Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 8	Sheet 1 of 1
---	-------------------------	---------------------	------------------------

Diagram	Sectional Details
---------	-------------------

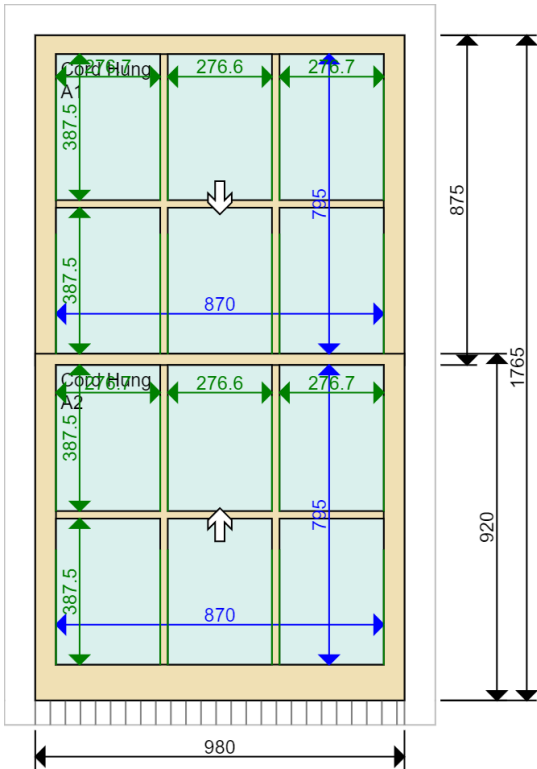

Sash Head	50 mm	
Sash Stile	55 mm	
Sash Btm Rail (int)	95 mm	Square
Sash Midrail	30 mm	
Sash Thickness	36 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Location First Floor RHS Flat 5 Kitchen	Glazing Bar	20 mm (4 mm Nib)
	Profile	Ovolo
	Moulding Cutter	6 x 13 with 6 mm shoulder
	Glazing Rebate	8 x 15 mm

Material Accoya	Quantity 1 of shown on drawing
Ironmongery 1 x Fitch Catch PB 4 x Rola Lock Back Plate Fastener 2 x Rola Lock Egress PB 2 x Sash Lift PB	Glazing Single Glazed Top 4mm Clear Float Btm 4mm Clear Float Dry Seal
	Paint Finish Internal Standard White External Standard White Cill Standard White

Production Notes *DEEPER CORD GROOVES	Installation Notes Installed: Internally THIS ITEM IS LHS. 1. OUT OF SQ VERTICAL 5mm. 2. SCRAPE AND FILL CILL.
---	--

2 | 13 | 6 | 15


Job Tracking	
Order received: 30-10-2023	Print date: 06-12-2023
Sold by: Andy Macrae	
Surveyed by: Chris Jewiss	Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 9	Sheet 1 of 1
---	-------------------------	---------------------	------------------------

Diagram	Sectional Details
---------	-------------------

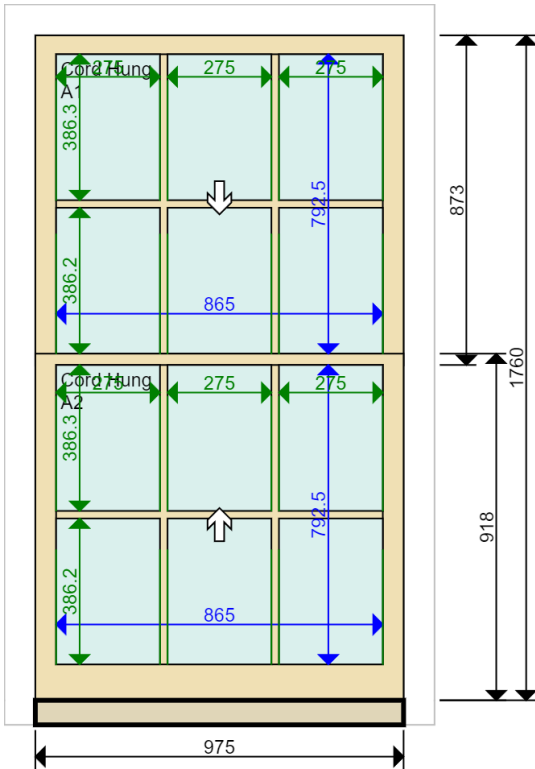

Sash Head	50 mm	
Sash Stile	55 mm	
Sash Btm Rail (int)	95 mm	Square
Sash Midrail	30 mm	
Sash Thickness	36 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	

Location First Floor RHS Flat 5 Kitchen	Glazing Bar	20 mm (4 mm Nib)
	Profile	Ovolo
	Moulding Cutter	6 x 13 with 6 mm shoulder
	Glazing Rebate	8 x 15 mm

Material Accoya	Quantity 1 of shown on drawing
---------------------------	---

Ironmongery 1 x Fitch Catch PB 4 x Rola Lock Back Plate Fastener 2 x Rola Lock Egress PB 2 x Sash Lift PB	Glazing Single Glazed Top 4mm Clear Float Btm 4mm Clear Float Dry Seal
---	--

	Paint Finish Internal Standard White External Standard White Cill Standard White
--	---

Production Notes *DEEPER CORD GROOVES	Installation Notes Installed: Internally THIS ITEM IS RHS. 1. OUT OF SQ VERTICAL 5mm. 2. NEW CILL NON STANDARD DETAIL.
---	--

2 | 13 | 6 | 15


Job Tracking Order received: 30-10-2023 Sold by: Andy Macrae Surveyed by: Chris Jewiss	Print date: 06-12-2023 Last modified date: 06-12-2023
---	--

JOINERY DETAIL SHEET

1 x 1 Complete New Single Spiral Sash Window (DocL / WER) (Classic)

Customer Fortside Investments Limited	Job No C37337	Item No 10	Sheet 1 of 1
---	-------------------------	----------------------	------------------------

Diagram

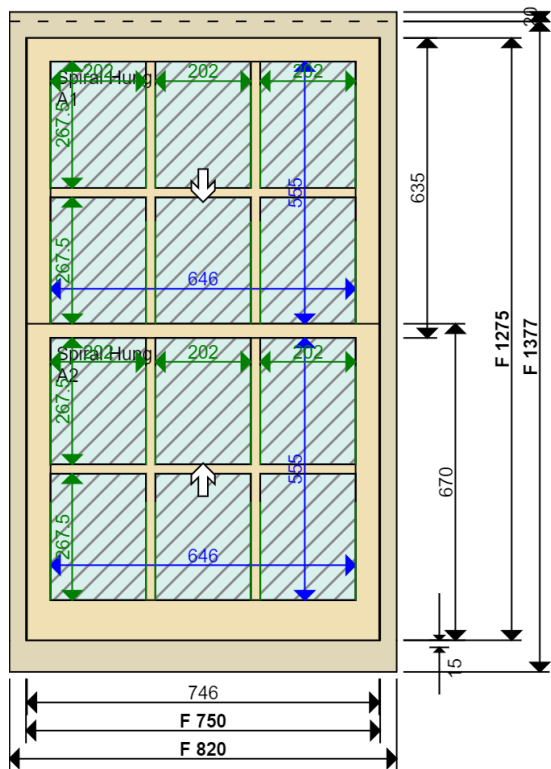

Sectional Details

Jamb Type	Solid Spiral for Sash
Inner Head	134 x 35 mm
Ext. Head Plant On	20 mm
Inner Jamb	134 x 35 mm
Cill	152 x 67 mm
Sash Head	50 mm
Sash Stile	50 mm
Sash Btm Rail (int)	85 mm Stepped
Sash Midrail	30 mm
Sash Thickness	39 mm
Top Sash Horn	No horn
Btm Sash Horn	No horn

Location

First Floor Rear Flat 5 Bathroom

Material Accoya sashes, Accoya frame, Accoya cill	Quantity 1 of shown on drawing	Glazing Bar 20 mm (4 mm Nib)
		Profile Ovolo
		Moulding Cutter 6 x 13 with 10 mm should.
		Glazing Rebate 8 x 14 mm

Ironmongery

- 1 x Fitch Catch PB
- 4 x Rola Lock Back Plate Fastener
- 2 x Rola Lock Egress PB
- 2 x Sash Lift PB

Glazing

- Single Glazed
- Top 4mm Stippolyte Float
- Btm 4mm Stippolyte Float Toughened

Dry Seal

Paint Finish

- Internal Standard White
- External Standard White
- Cill Standard White

Production Notes

*SPIRALS FRAME RECESSED INTERNALLY

Installation Notes

- Installed: Internally
- External Access: Scaffold by Customer
- 1. FIT ON SAME EXTERNAL POSITION.
- 2. MAY NEED TO REBATE INSIDE OF FRAME HEAD DUE TO CEILING.
- 3. FIT LINERS, ARCHITRAVES AND WINDOWBOARD.

2 | 13 | 10 | 14

Job Tracking


Order received: 30-10-2023 Print date: 06-12-2023
Sold by: Andy Macrae
Surveyed by: Chris Jewiss Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Complete New Single Spiral Sash Window (DocL / WER) (Classic)

Customer Fortside Investments Limited	Job No C37337	Item No 11	Sheet 1 of 1
---	-------------------------	----------------------	------------------------

Diagram

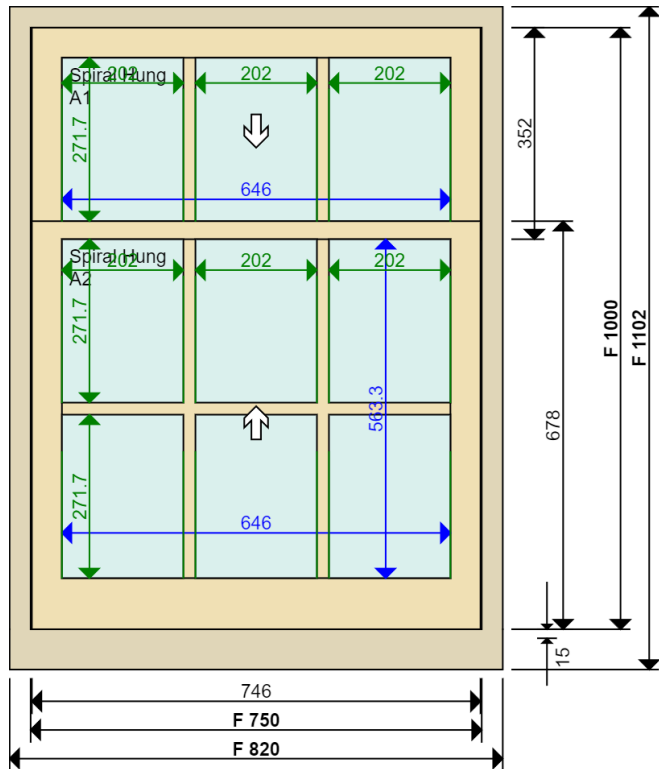

Sectional Details

Jamb Type	Solid Spiral for Sash
Inner Head	134 x 35 mm
Inner Jamb	134 x 35 mm
Cill	169 x 67 mm
Sash Head	50 mm
Sash Stile	50 mm
Sash Btm Rail (int)	85 mm Stepped
Sash Midrail	30 mm
Sash Thickness	39 mm
Top Sash Horn	No horn
Btm Sash Horn	No horn
Glazing Bar	20 mm (4 mm Nib)
Profile	Ovolo
Moulding Cutter	6 x 13 with 10 mm should.
Glazing Rebate	8 x 14 mm

Location

Second Floor Rear Flat 5 Guest room

Material Accoya sashes, Accoya frame, Accoya cill	Quantity 1 of shown on drawing
---	---

Ironmongery

- 1 x Fitch Catch PB
- 4 x Rola Lock Back Plate Fastener
- 2 x Rola Lock Egress PB
- 2 x Sash Lift PB

Glazing

- Single Glazed
- Top 4mm Clear Float
- Btm 4mm Clear Float

Dry Seal

Paint Finish

- Internal Standard White
- External Standard White
- Cill Standard White

Production Notes

- *CILL EXTENSION LOOSE ON AMS.
- *SPIRALS FRAME RECESSED INTERNALLY

Installation Notes

- Installed: Externally
- External Access: Scaffold by Customer
- Dormer Issues: Dormer with External Lining
- 1. FIT FRAME ON SAME INTERNAL POSITION.
- 2. FIT 2 PART LINERS EXTERNALLY TO THE SIDES AND BELOW THE EAVES. CURRENTLY 35mm THICK WITH BEVEL PROFILE, NEW TO BE 20mm FLAT PROFILE.
- 3. FIT QUADS INTERNALLY AND OVULO STOP TO HEAD. FIT WINDOWBOARD.

2 | 13 | 10 | 14

Job Tracking

Order received: 30-10-2023 Print date: 06-12-2023
Sold by: Andy Macrae
Surveyed by: Chris Jewiss Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Complete New Single Spiral Sash Window (DocL / WER) (Classic)

Customer

Fortside Investments Limited

Job No

C37337


Item No	Item Description	Unit	Quantity	Unit Price	Total Price
1	...	...	...	...	...
2	...	...	...	...	...
3	...	...	...	...	...
4	...	...	...	...	...
5	...	...	...	...	...
6	...	...	...	...	...
7	...	...	...	...	...
8	...	...	...	...	...
9	...	...	...	...	...
10	...	...	...	...	...
11	...	...	...	...	...
12	...	...	...	...	...
13	...	...	...	...	...
14	...	...	...	...	...
15	...	...	...	...	...
16	...	...	...	...	...
17	...	...	...	...	...
18	...	...	...	...	...
19	...	...	...	...	...
20	...	...	...	...	...
21	...	...	...	...	...
22	...	...	...	...	...
23	...	...	...	...	...
24	...	...	...	...	...
25	...	...	...	...	...
26	...	...	...	...	...
27	...	...	...	...	...
28	...	...	...	...	...
29	...	...	...	...	...
30	...	...	...	...	...
31	...	...	...	...	...
32	...	...	...	...	...
33	...	...	...	...	...
34	...	...	...	...	...
35	...	...	...	...	...
36	...	...	...	...	...
37	...	...	...	...	...
38	...	...	...	...	...
39	...	...	...	...	...
40	...	...	...	...	...
41	...	...	...	...	...
42	...	...	...	...	...
43	...	...	...	...	...
44	...	...	...	...	...
45	...	...	...	...	...
46	...	...	...	...	...
47	...	...	...	...	...
48	...	...	...	...	...
49	...	...	...	...	...
50	...	...	...	...	...
51	...	...	...	...	...
52	...	...	...	...	...
53	...	...	...	...	...
54	...	...	...	...	...
55	...	...	...	...	...
56	...	...	...	...	...
57	...	...	...	...	...
58	...	...	...	...	...
59	...	...	...	...	...
60	...	...	...	...	...
61	...	...	...	...	...
62	...	...	...	...	...
63	...	...	...	...	...
64	...	...	...	...	...
65	...	...	...	...	...
66	...	...	...	...	...
67	...	...	...	...	...
68	...	...	...	...	...
69	...	...	...	...	...
70	...	...	...	...	...
71	...	...	...	...	...
72	...	...	...	...	...
73	...	...	...	...	...
74	...	...	...	...	...
75	...	...	...	...	...
76	...	...	...	...	...
77	...	...	...	...	...
78	...	...	...	...	...
79	...	...	...	...	...
80	...	...	...	...	...
81	...	...	...	...	...
82	...	...	...	...	...
83	...	...	...	...	...
84	...	...	...	...	...
85	...	...	...	...	...
86	...	...	...	...	...
87	...	...	...	...	...
88	...	...	...	...	...
89	...	...	...	...	...
90	...	...	...	...</	

12

Sheet

1 of 1

Diagram

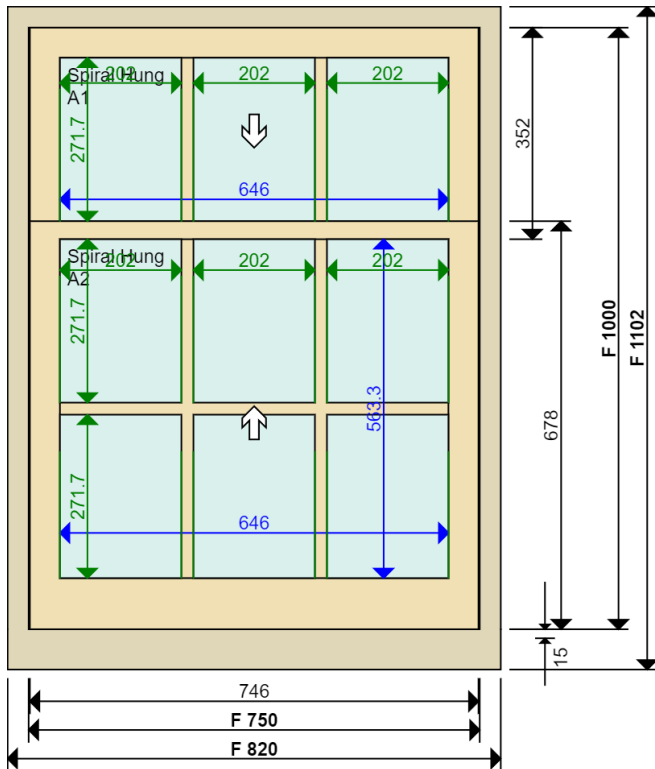

Sectional Details

Jamb Type	Solid Spiral for Sash
Inner Head	134 x 35 mm
Inner Jamb	134 x 35 mm
Cill	169 x 67 mm



Sash Head	50 mm	
Sash Stile	50 mm	
Sash Btm Rail (int)	85 mm	Stepped
Sash Midrail	30 mm	
Sash Thickness	39 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Location

Second Floor Front Flat 5 Main Bedroom

Glazing Bar	20 mm (4 mm Nib)
Profile	Ovolo
Moulding Cutter	6 x 13 with 10 mm should.
Glazing Rebate	8 x 14 mm

Material

**Accoya sashes,
Accoya frame, Accoya cill**

Quantity

1
of shown on drawing

Ironmongery

1 x Fitch Catch PB
4 x Rola Lock Back Plate Fastener
2 x Rola Lock Egress PB
2 x Sash Lift PB

Glazing

Single Glazed
4mm Clear Float
4mm Clear Float

Dry Seal

Paint Finish

Internal	Standard White
External	Standard White
Cill	Standard White

Production Notes

*CILL EXTENSION LOOSE ON AMS.
*SPIRALS FRAME RECESSED INTERNALLY

Installation Notes

Installed:	Externally
External Access:	Scaffold by Customer
Dormer Issues:	Dormer with External Lining

1. FIT FRAME ON SAME INTERNAL POSITION.
2. FIT 2 PART LINERS EXTERNALLY TO THE SIDES AND BELOW THE EAVES. CURRENTLY 35mm THICK WITH BEVEL PROFILE, NEW TO BE 20mm FLAT PROFILE.
3. FIT QUADS INTERNALLY AND OVOLO STOP TO HEAD. FIT WINDOWBOARD.

2 | 13 | 10 | 14

Job Tracking

Order received: 30-10-2023

Print date: 06-12-2023

Sold by: Andy Macrae

Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 18	Sheet 1 of 1
---	-------------------------	----------------------	------------------------

Diagram	Sectional Details
	Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (int) 95 mm Square Sash Midrail 30 mm Sash Thickness 36 mm Top Sash Horn No horn Btm Sash Horn No horn

Location Ground Floor RHS Flat 3 Bedsit	Glazing Bar 20 mm (4 mm Nib)
Material Accoya	Profile Ovolo
Quantity 1 of shown on drawing	Moulding Cutter 6 x 13 with 6 mm shoulder
	Glazing Rebate 8 x 15 mm

Ironmongery 1 x Fitch Catch PB 4 x Rola Lock Back Plate Fastener 2 x Rola Lock Egress PB 2 x Sash Lift PB	Glazing Single Glazed
	Top 4mm Clear Float
	Btm 4mm Clear Float
	Dry Seal
	Paint Finish
	Internal Standard White
	External Standard White
	Cill Standard White

Production Notes *DEEPER CORD GROOVES	Installation Notes Installed: Internally THIS ITEM IS LHS. 1. SPLICE REPAIRS X 4 OUTER JAMBS NON STD DETAIL TO MATCH EXISTING. 2. NEW CILL NON STANDARD DETAIL. 3. CUSTOMER TO REMOVE PANELLING IN FRONT OF CILL TO ALLOW CILL TO BE CHOPPED OUT AND REPLACED. WINDOWBOARD TO BE REINSTATED POST WINDOW INSTALLATION. 4. FIT STAFF BEAD TO CILL. TULIPWOOD UPSTAND SUPPLIED TO ALLOW GAP TO BE COVERED BETWEEN STAFF BEAD AND WINDOWBOARD.
---	--

Job Tracking Order received: 30-10-2023 Sold by: Andy Macrae Surveyed by: Chris Jewiss	2 13 6 15 Print date: 06-12-2023 Last modified date: 06-12-2023
---	---

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 19	Sheet 1 of 1
---	-------------------------	----------------------	------------------------

Diagram	Sectional Details
	Sash Head 50 mm Sash Stile 50 mm Sash Btm Rail (int) 95 mm Square Sash Midrail 30 mm Sash Thickness 36 mm Top Sash Horn No horn Btm Sash Horn No horn

Location Ground Floor RHS Flat 3 Bedsit	Glazing Bar 20 mm (4 mm Nib) Profile Ovolo Moulding Cutter 6 x 13 with 6 mm shoulder Glazing Rebate 8 x 15 mm
Material Accoya	Quantity 1 of shown on drawing

Ironmongery 1 x Fitch Catch PB 4 x Rola Lock Back Plate Fastener 2 x Rola Lock Egress PB 2 x Sash Lift PB	Glazing Single Glazed Top 4mm Clear Float Btm 4mm Clear Float Dry Seal Paint Finish Internal Standard White External Standard White Cill Standard White
--	--

Production Notes *DEEPER CORD GROOVES	Installation Notes Installed: Internally THIS ITEM IS RHS. 1. SPLICE REPAIRS X 4 OUTER JAMBS NON STD DETAIL TO MATCH EXISTING. 2. NEW CILL NON STANDARD DETAIL. 3. CUSTOMER TO REMOVE PANELLING IN FRONT OF CILL TO ALLOW CILL TO BE CHOPPED OUT AND REPLACED. WINDOWBOARD TO BE REINSTATED POST WINDOW INSTALLATION. 4. FIT STAFF BEAD TO CILL. TULIPWOOD UPSTAND SUPPLIED TO ALLOW GAP TO BE COVERED BETWEEN STAFF BEAD AND WINDOWBOARD.
--	---


Job Tracking Order received: 30-10-2023 Sold by: Andy Macrae Surveyed by: Chris Jewiss	Print date: 06-12-2023 Last modified date: 06-12-2023
--	---

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 20	Sheet 1 of 1
---	-------------------------	----------------------	------------------------

Diagram	Sectional Details
---------	-------------------

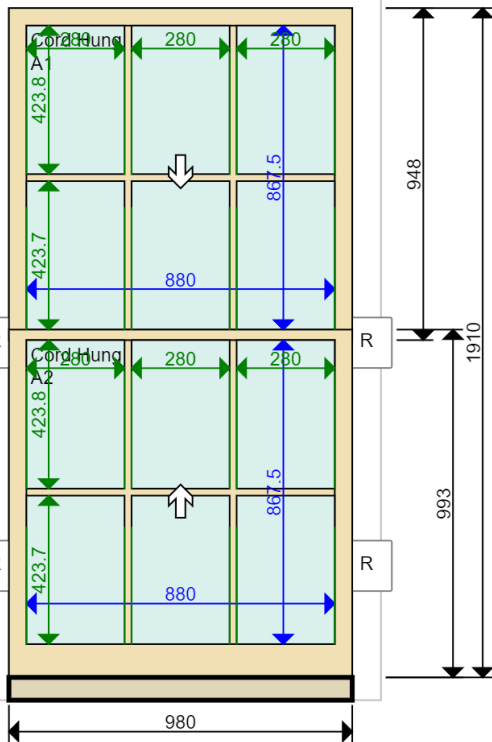

Sash Head	50 mm	
Sash Stile	50 mm	
Sash Btm Rail (int)	95 mm	Square
Sash Midrail	30 mm	
Sash Thickness	36 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Location Ground Floor Front Flat 3 Bedsit	Glazing Bar 20 mm (4 mm Nib)
Material Accoya	Profile Ovolo
Quantity 1 of shown on drawing	Moulding Cutter 6 x 13 with 6 mm shoulder
	Glazing Rebate 8 x 15 mm

Ironmongery 1 x Fitch Catch PB 4 x Rola Lock Back Plate Fastener 2 x Rola Lock Egress PB 2 x Sash Lift PB	Glazing Single Glazed
	Top 4mm Clear Float
	Btm 4mm Clear Float
	Dry Seal
	Paint Finish
	Internal Standard White
	External Standard White
	Cill Standard White

Production Notes *DEEPER CORD GROOVES	Installation Notes Installed: Internally THIS ITEM IS RHS. 1. SPLICE REPAIRS X 4 OUTER JAMBS NON STD DETAIL TO MATCH EXISTING. 2. NEW CILL NON STANDARD DETAIL. 3. CUSTOMER TO REMOVE PANELLING IN FRONT OF CILL TO ALLOW CILL TO BE CHOPPED OUT AND REPLACED. WINDOWBOARD TO BE REINSTATED POST WINDOW INSTALLATION. 4. FIT STAFF BEAD TO CILL. TULIPWOOD UPSTAND SUPPLIED TO ALLOW GAP TO BE COVERED BETWEEN STAFF BEAD AND WINDOWBOARD.
---	--

2 | 13 | 6 | 15


Job Tracking	Order received: 30-10-2023	Print date: 06-12-2023
	Sold by: Andy Macrae	
	Surveyed by: Chris Jewiss	Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 26	Sheet 1 of 1
---	-------------------------	----------------------	------------------------

Diagram	Sectional Details
---------	-------------------

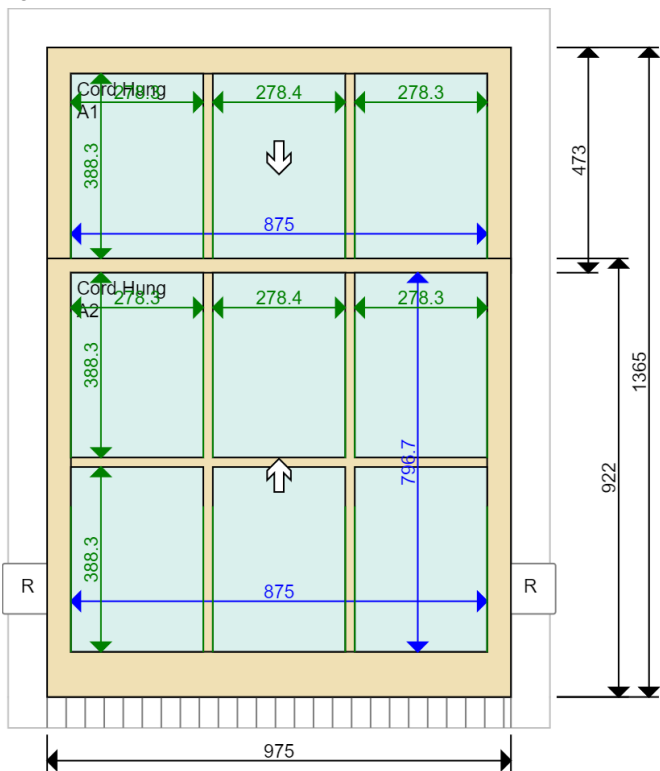

Sash Head	55 mm	
Sash Stile	50 mm	
Sash Btm Rail (int)	95 mm	Square
Sash Midrail	30 mm	
Sash Thickness	36 mm	
Top Sash Horn	No horn	
Btm Sash Horn	No horn	



Glazing Bar	20 mm (4 mm Nib)
Profile	Ovolo
Moulding Cutter	6 x 13 with 6 mm shoulder
Glazing Rebate	8 x 15 mm

Location Basement RHS Flat 1 bedsit
Material Accoya
Quantity 1 of shown on drawing

Ironmongery 1 x Fitch Catch PB 1 x Lock Chubb Window Key 4 x Rola Lock Back Plate Fastener 2 x Rola Lock PB 2 x Sash Lift PB	Glazing Single Glazed Top 4mm Clear Float Btm 4mm Clear Float Dry Seal
	Paint Finish Internal Standard White External Standard White Cill Standard White

Production Notes *REBATE SASH STILES FOR SPIRALS TOP AND BOTTOM.	Installation Notes Installed: Internally 1. OUT OF SQ HORIZ WITH ITEM 27 = 10mm. 2. SPLICE REPAIR X 2. 3. SCRAPE AND FILL CILL.
---	---

2 | 13 | 6 | 15

Job Tracking Order received: 30-10-2023 Sold by: Andy Macrae Surveyed by: Chris Jewiss	Print date: 06-12-2023 Last modified date: 06-12-2023
---	--

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Cord Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 27	Sheet 1 of 1
---	-------------------------	----------------------	------------------------

Diagram	Sectional Details
	Sash Head 55 mm Sash Stile 50 mm Sash Btm Rail (int) 95 mm Square Sash Midrail 30 mm Sash Thickness 36 mm Top Sash Horn No horn Btm Sash Horn No horn

Location Basement RHS Flat 1 Bedsit	Glazing Bar 20 mm (4 mm Nib)
Material Accoya	Profile Ovolo
Quantity 1 of shown on drawing	Moulding Cutter 6 x 13 with 6 mm shoulder
	Glazing Rebate 8 x 15 mm

Ironmongery 1 x Fitch Catch PB 1 x Lock Chubb Window Key 4 x Rola Lock Back Plate Fastener 2 x Rola Lock PB 2 x Sash Lift PB	Glazing Single Glazed
	Top 4mm Clear Float
	Btm 4mm Clear Float
	Dry Seal
	Paint Finish
	Internal Standard White
	External Standard White
	Cill Standard White

Production Notes *REBATE SASH STILES FOR SPIRALS TOP AND BOTTOM.	Installation Notes Installed: Internally 1. OUT OF SQ HORIZ WITH ITEM 26 = 10mm. 2. SPLICE REPAIR X 1. 3. SCRAPE AND FILL CILL.
---	---

Job Tracking	Order received: 30-10-2023	Print date: 06-12-2023
	Sold by: Andy Macrae	
	Surveyed by: Chris Jewiss	Last modified date: 06-12-2023

JOINERY DETAIL SHEET

1 x 1 Pair of Sashes to Spiral Hung Sash Window

Customer Fortside Investments Limited	Job No C37337	Item No 28	Sheet 1 of 1
---	-------------------------	----------------------	------------------------

Diagram	Sectional Details
---------	-------------------

Diagram showing dimensions and components of the spiral hung sash window. The window is 750mm wide and 1025mm high. It consists of two sashes, A1 (top) and A2 (bottom), each 650mm wide and 357mm high. The sashes are made of Accoya material. The diagram shows the internal dimensions of the sashes and the overall dimensions of the window frame. A label 'R' is present on the right side of the diagram.

Sash Head 50 mm

Sash Stile 50 mm

Sash Btm Rail (int) 95 mm Square

Sash Midrail 30 mm

Sash Thickness 39 mm

Top Sash Horn No horn

Btm Sash Horn No horn

Location Basement LHS Flat 1 Bathroom	Glazing Bar 20 mm (4 mm Nib)
Material Accoya	Profile Ovolo
Quantity 1 of shown on drawing	Moulding Cutter 6 x 13 with 10 mm should.
	Glazing Rebate 8 x 14 mm

Ironmongery 1 x Fitch Catch PB 1 x Lock Chubb Window Key 4 x Rola Lock Back Plate Fastener 2 x Rola Lock PB 2 x Sash Lift PB	Glazing Single Glazed Top 4mm Stippolyte Float Btm 4mm Stippolyte Float Toughened Dry Seal
	Paint Finish Internal Standard White External Standard White Cill Standard White

Production Notes	Installation Notes Installed: Internally 1. SPLICE REPAIRS X 1.
------------------	---

2 | 13 | 10 | 14

Job Tracking

Order received: 30-10-2023 Print date: 06-12-2023

Sold by: Andy Macrae

Surveyed by: Chris Jewiss Last modified date: 06-12-2023